UNIQ
SMART BALUSTRADES

DELIVERY PROGRAM UNIQ

DELIVERY PROGRAM
WWW.UNIQ-BALUSTRADES.COM
ENGLISH

the basis for every balustrade

Compagnie Het Zoute, project La Rive - La Réserve II

UNIQ

the basis for every balustrade

UNIQ is the perfect basis for every balustrade. The clamping of the glass with the patented clamping strip, the adjustability of the profiles on rough surfaces and the quick and easy assembly are unique and smart features that save time and money.

The extensive range of UNIQ profiles offers its own solution for every application, both for private use and for applications in public buildings. For mounting on or against the floor, for finished or rough floors in concrete, steel or wood and for line loads 0.3, 0.5, 0.8, 1, 2 and 3 kN/m.

The profiles and associated parts for finishing are available in brute, stainless steel look or satin black anodised.

The detailed information in this brochure is also available on the website www.uniq-balustrades.com

UNIQ profiles are an innovation from IMS Nederland. This company has been a supplier of semi-finished products in steel, stainless steel and aluminium since 1954.

www.ims-nederland.biz

IMS Nederland B.V. is ISO 9001:2015 and CE certified.

ISO 9001:2015

INDEX

	Page
UNIQ SB-O1	16
UNIQ SB-O2	20
UNIQ SB-O3	24
UNIQ SB-A1	28
UNIQ SB-A2	32
UNIQ SB-A3	36
UNIQ SB-O 0.5S	40
UNIQ SB-O1S	44

	Page
UNIQ SB-O2S	48
UNIQ SB-A 0.5SI	52
UNIQ SB-A1S	56
UNIQ SB-A2S	60
UNIQ SB-OXS	64
fischer Anchor Fisher / Mounting tools	68
Slotted Tube System	72
Glass Clips	76
Spigot	86

“

UNIQ OFFERS ENDLESS POSSIBILITIES FOR GLASS BALUSTRADES AND WINDBREAKS

Errors and omissions are excluded. UNIQ reserves the right to make changes. Products may differ from images shown.

6 REASONS TO CHOOSE UNIQ

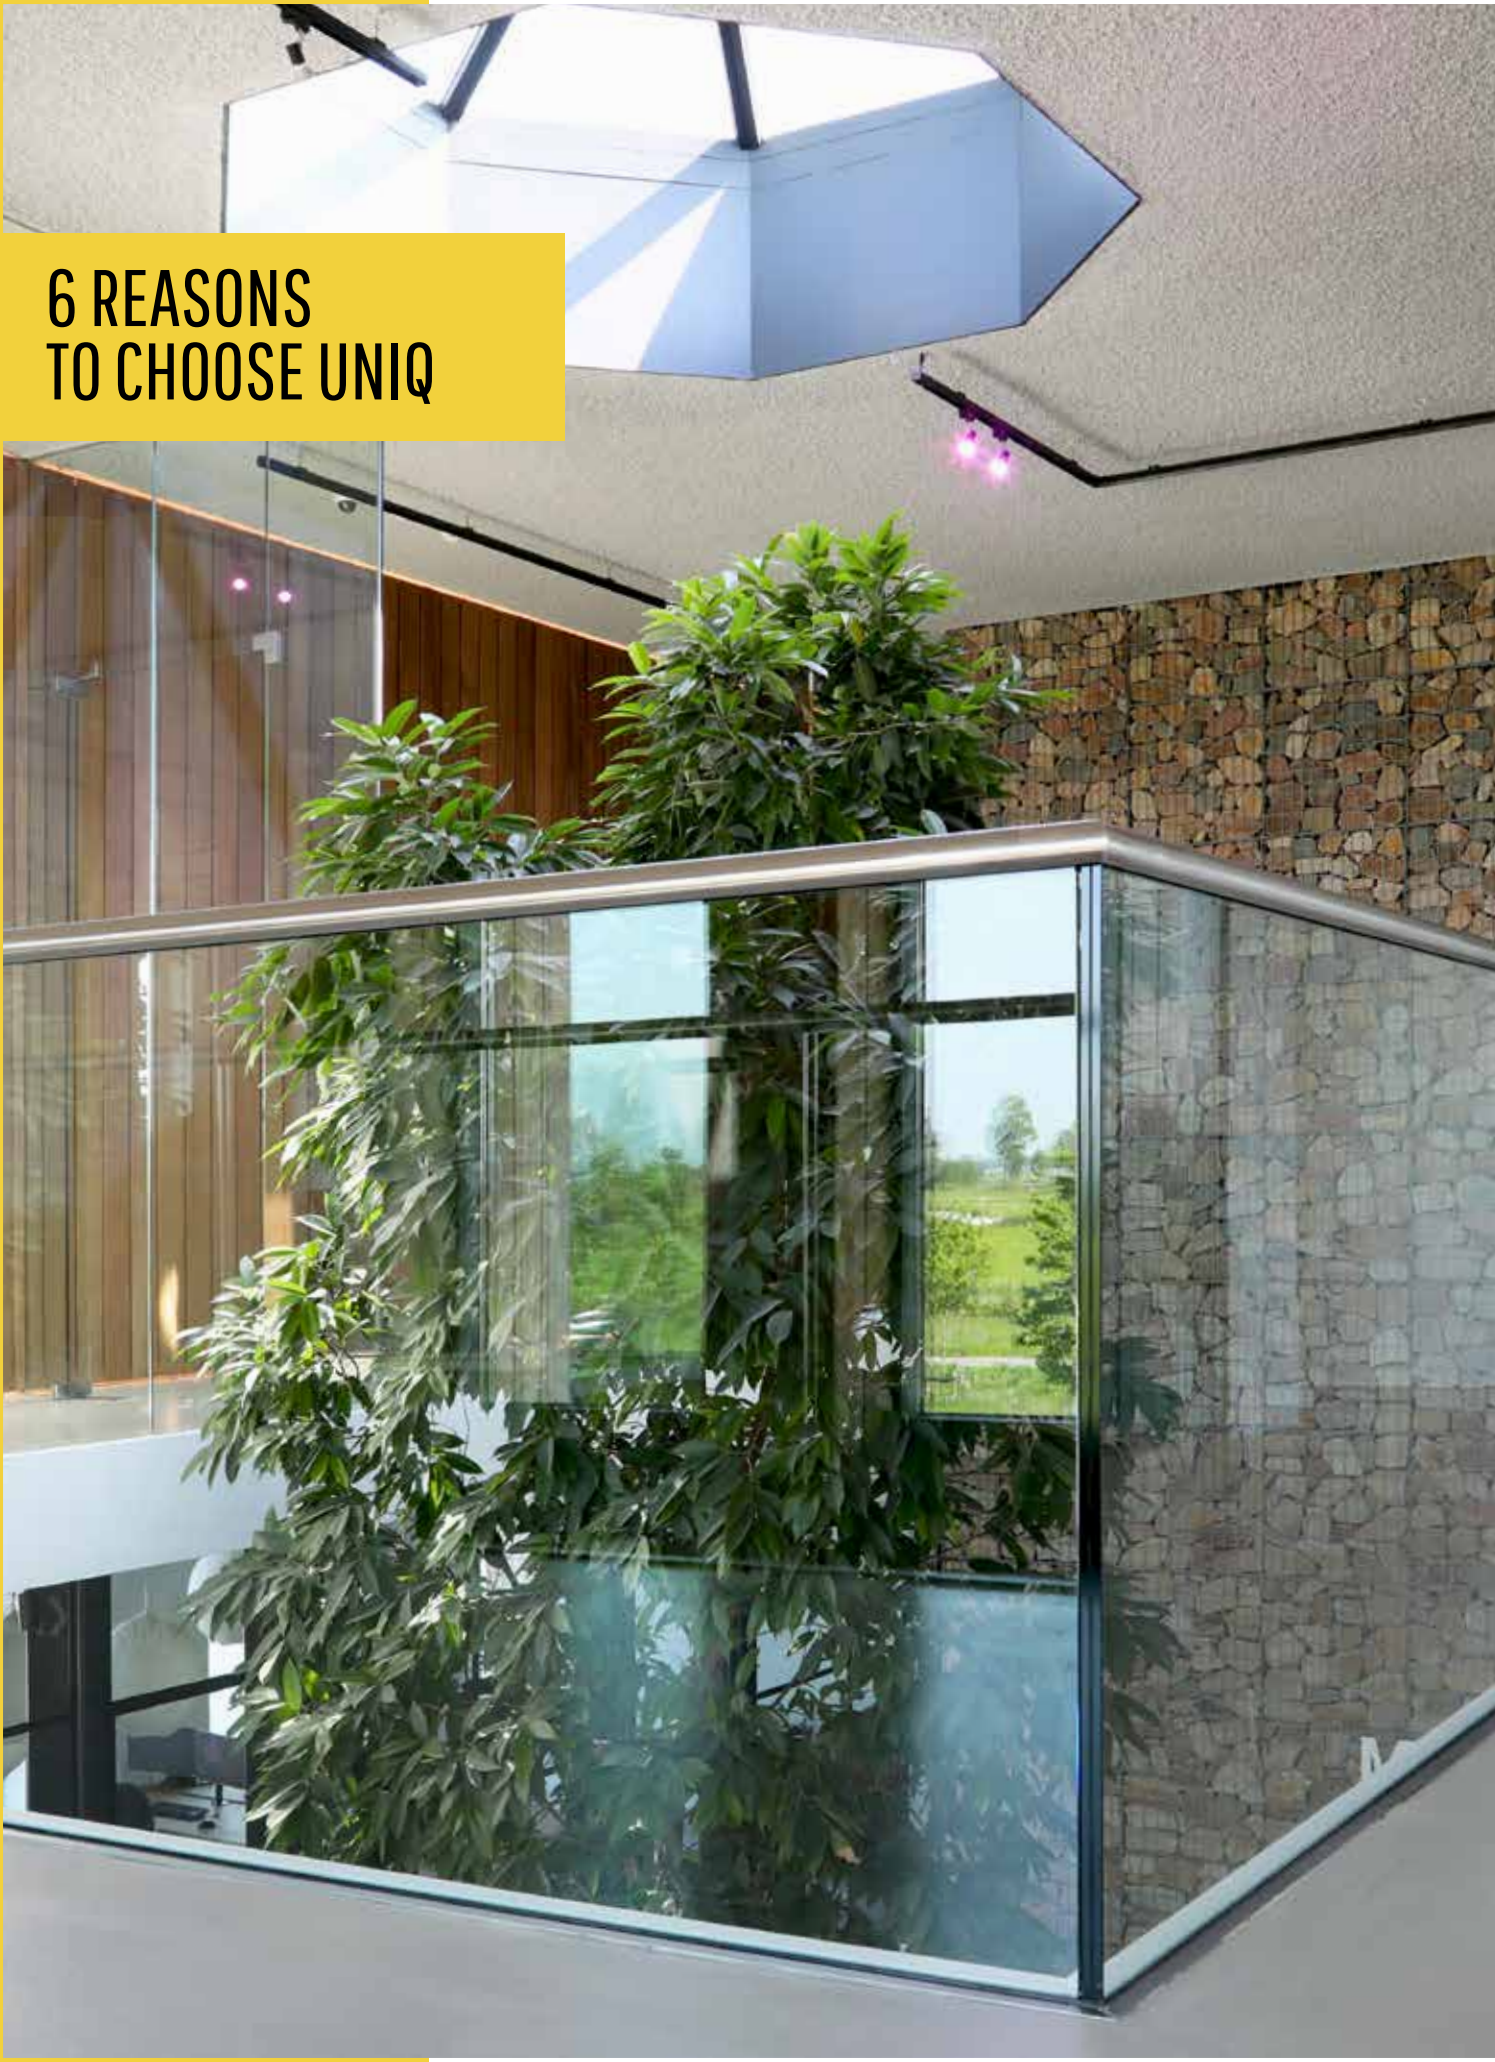

SMART CLAMPING

The patented clamping strip holds the glass securely in place. The lack of wedges means no stress in the glass, with the tension distributed evenly across the entire pane.

ADJUSTABLE

The profiles are secured via adjustable nuts, meaning that the profiles are always level and the glass is always straight, no matter how uneven the surface.

QUICK ASSEMBLY

Assembling a balustrade has never been so quick and easy: secure the profile, put the glass in place, apply the clamping strip and tighten the bolts. That's it!

SAFE

The clamping strip guarantees the glass will never come loose. It's the ultimate in safety.

LIGHT AND STRONG

The sophisticated hollow design makes the profiles lighter and stronger. It's the best choice both, structurally and financially.

ELEGANT FINISHING

The lack of rubbers ensures a stylish look. Various covers are available for finishing the floor and front side: simply click them into place.

ABOUT UNIQ

UNIQ STANDS FOR BEAUTIFUL AND SAFE

Transparency and light are important principles in the design of homes and buildings. Glass balustrades fit in perfectly with this. They offer an unobstructed view of the surroundings and the luxurious appearance makes every balcony, loft, terrace or staircase a true jewel. Safety comes first. That is why the UNIQ profiles have been internationally tested and certified.

NO MORE RUBBERS

To ensure the floor blends seamlessly into the glass, UNIQ uses no ugly rubbers. This creates a smooth, stylish finish that elegantly accentuates any architectural style.

FINISHING

A variety of aluminium covers can be easily clicked onto the base profile. Covers are available for both the floor side and the front side to ensure the perfect finish for your balustrade.

FOR EVERY STYLE AND TASTE

The UNIQ profiles and covers for finishing are supplied in a beautiful stainless steel look as standard. Or opt for the satin black anodized profiles, which fit perfectly with the industrial living trend and are also available from stock. The profiles are also available in brute, so that they can be finished in any desired colour.

ALWAYS THE RIGHT PROFILE

The 0.5 kN profiles are the lightest and smallest in the range and are intended for the private sector. They are available for mounting on or against the floor.

The different profiles of the 1kN series are suitable for all kinds of balustrades. By using the plating covers they are completely invisible and are mainly used in new constructions. The smaller S versions are more often used for renovation projects. These profiles are mounted on or against an already finished floor.

The 2 kN profiles are an excellent option for high-rise projects, especially for balconies in places where wind loads are decisive. With these profiles, thinner glass can be used in many cases, which saves costs.

The 3 kN profiles are the strongest profiles in the range. With a line load of up to 3 kN/m, they are real powerhouses and suitable for applications in places where large groups of people come together, such as sports buildings, cinemas and theatres.

The OXS profile has been specially developed for creating windbreaks. The same system, the same sleek appearance, but smaller in size and therefore an almost inconspicuous yet strong basis for a windbreak up to a maximum height of 90 cm.

TESTS | CERTIFICATIONS

UNIQ profiles have been tested in several countries by the following agencies.

THE NETHERLANDS SKG-IKOB

FRANCE CSTB

AVIS TECHNIQUE

DÉNOMINATION COMMERCIALE

n°2.1/19-1803*V1 publié le 25/11/2019

GERMANY LGA AbP P-179925-LGA

EUROPE CE

BELGIUM wtcb.be

FOR EVERY PROJECT

the right profile

Nowadays, glass balustrades can be found in numerous construction projects. The extensive range of UNIQ profiles is versatile. From private balconies, holiday villas and apartment complexes to commercial buildings, shop premises, interiors and along terraces, UNIQ has the right profile for every large or small project. Here is a small selection of the many projects where UNIQ profiles have been used.

“

THE EXTENSIVE PACKAGE OF UNIQ PROFILES IS PARTICULARLY VERSATILE

Compagnie Het Zoute, project La Rive - La Réserve II

Compagnie Het Zoute, project La Rive - La Réserve II

Compagnie Het Zoute, project La Rive - La Réserve II

UNIQUE CLAMPING STRIP

The patented, continuous clamping strip makes the UNIQ system truly unique. With this clamping strip, the way the glass is held in place is substantially different from other systems, which brings significant benefits.

UNIQUE IN MOUNTING AND POSITIONING POSSIBILITIES

In addition to structural anchors, the O and A profiles can be mounted with a second row of anchors. These anchors are especially for leveling the profiles. The glass is completely and evenly clamped with the patented clamping strip, which avoids high tension in the glass.

DOUBLE SAFETY

The continuous clamping strip is secured in two ways. Cogging on both the clamping strip and the profile works as the first locking. The tightening of the specially designed bolts ensures the second locking.

Tapping the clamping strip

> WITH THE HANDY TOOL ON THE WEBSITE YOU CAN COMPILE AND VIEW YOUR BALUSTRADE

The continuous clamping strip is clearly visible

MOUNTING UNIQ STEP BY STEP

Check the instruction video

“

UNIQ PROFILES CLAMP THE GLASS COMPLETELY.
WHERE THE BALCONY ENDS, THE GLASS BEGINS

product overview

	Model		Glass	Profile adjustable	Page
	SB-O1	1 kN/m Top Mounted	15 8/8/pvb 10/10/pvb	✔	16
	SB-O2	2 kN/m Top Mounted	19 10/10/pvb 12/12/pvb	✔	20
	SB-O3	3 kN/m Top Mounted	12/12/pvb 8/8/8/pvb 15/15/pvb 10/10/10/pvb	✔	24
	SB-O 0.5S	0.5 kN/m Top Mounted	6/6/pvb 8/8/pvb	✘	40
	SB-O1S	1 kN/m Top Mounted	15 8/8/pvb 10/10/pvb	✘	44
	SB-O2S	2 kN/m Top Mounted	19 10/10/pvb 12/12/pvb	✘	48
	SB-A1	1 kN/m Side Mounted	15 8/8/pvb 10/10/pvb	✔	28
	SB-A2	2 kN/m Side Mounted	19 10/10/pvb 12/12/pvb	✔	32
	SB-A3	3 kN/m Side Mounted	12/12/pvb 8/8/8/pvb 15/15/pvb 10/10/10/pvb	✔	36
	SB-A 0.5SI	0.5 kN/m Side Mounted	8/8/pvb	✘	52
	SB-A1S	1 kN/m Side Mounted	15 8/8/pvb 10/10/pvb	✘	56
	SB-A2S	2 kN/m Side Mounted	19 10/10/pvb 12/12/pvb	✘	60
	SB-OXS	Top Mounted	8 12 4/4/pvb 6/6/pvb	✘	64

TOP MOUNTED (O)

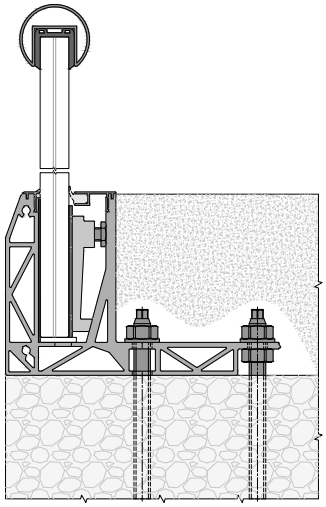

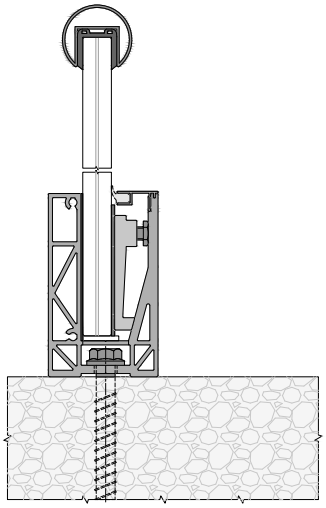

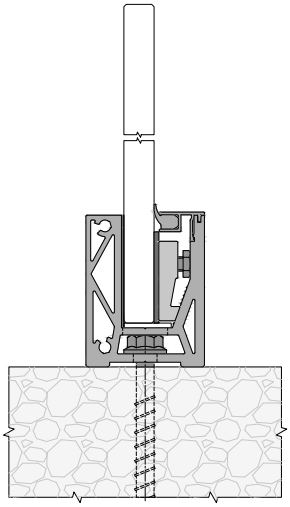

SIDE MOUNTED (A)

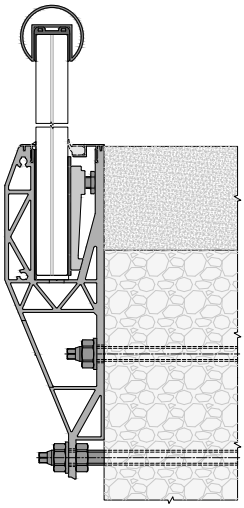

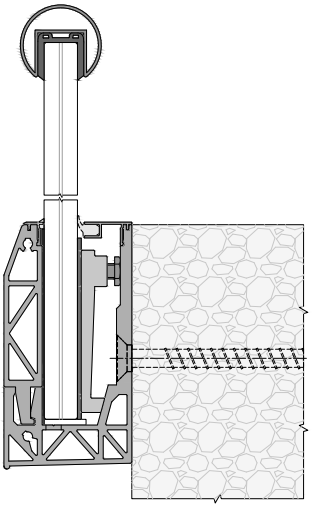

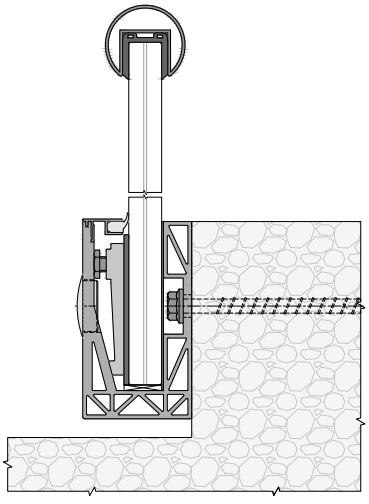

UNIQ SB-01 | TOP MONTAGE
1 kN/m

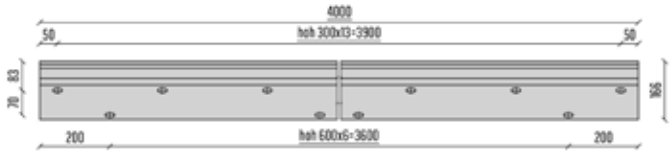

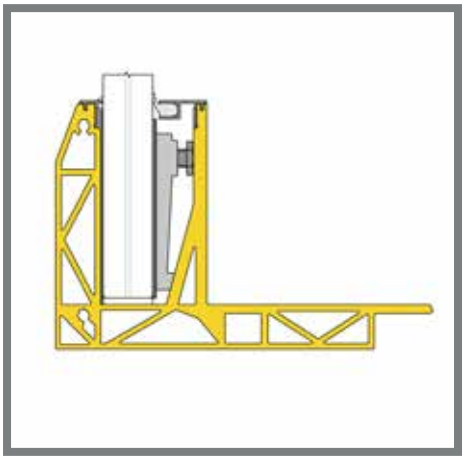





BASE PROFILE

		L
2089036	SB-O1 Brute	4000 mm
2089038	SB-O1 Stainless look	4000 mm

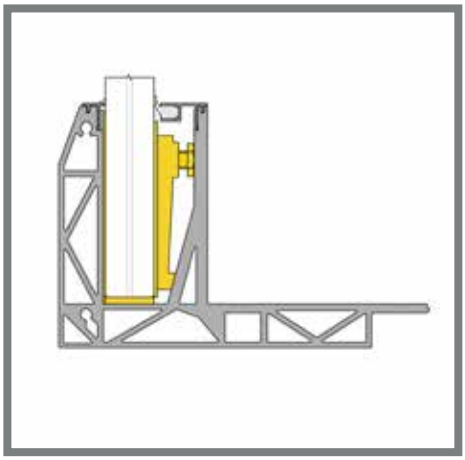



GLASS MOUNTING SET (GMS)

		L
2020151	GMS-L1- 10/10/pvb	4000 mm
2028329	GMS-XL1 - 8/8/pvb	4000 mm
2028334	GMS-XXL1 - 15	4000 mm

Content:
Clamping strip + glass blocks + required packing

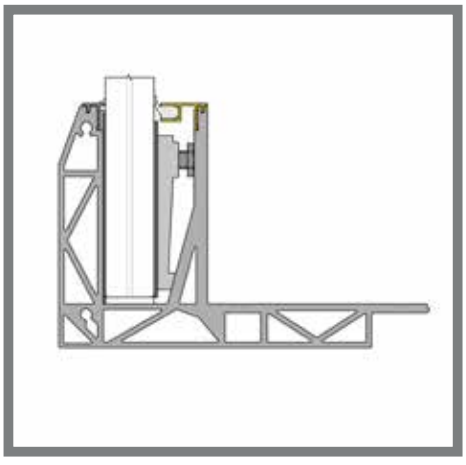





REAR COVER

		B	L
2089104	CR-L1 - 10/10/pvb - Brute	21	4000 mm
2089358	CR-L1 - 10/10/pvb - Stainless look	21	4000 mm
2089106	CR-XL1 - 8/8/pvb - Brute	25	4000 mm
2089359	CR-XL1 - 8/8/pvb - Stainless look	25	4000 mm
2089108	CR-XXL1 - 15 - Brute	28	4000 mm
2089360	CR-XXL1 - 15 - Stainless look	28	4000 mm

OPTIONAL FOR REAR COVER

		L
1012309	Rubber for the cover rear	1000 mm





FRONT COVER

		L
2089088	CF-100 Brute	4000 mm
2089350	CF-100 Stainless look	4000 mm

OPTIONAL FOR FRONT COVER

		L
1012311	Rubber for the cover front	1000 mm







PLATING COVERS

		D	B	L
2089090	CF-103 Brute	3	25	4000 mm
2089351	CF-103 Stainless look	3	25	4000 mm
2089092	CF-112 Brute	12	34	4000 mm
2089352	CF-112 Stainless look	12	34	4000 mm
2089094	CF-120 Brute	20	42	4000 mm
2089353	CF-120 Stainless look	20	42	4000 mm


end cover left



END COVERS

2033435	SB-O1 end cover left, Brute
2033439	SB-O1 end cover left, Stainless look
2033436	SB-O1 end cover right, Brute
2033440	SB-O1 end cover right, Stainless look

Small color differences between end caps and profiles are possible.







CORNER PIECES

2090626	SB-O1 Outside corner Brute
2090625	SB-O1 Outside corner Stainless look
2090622	SB-O1 Inside corner Brute
2090490	SB-O1 Inside corner Stainless look

fischer
innovative solutions

ANCHOR SB-01

2008327	FISCHER injection mortar SB 390 S
2089149	FISCHER RSB 10 MINI capsule (alternative)
2089819	FISCHER RGM 10x170 Threaded rod indoor
2089820	FISCHER RGM 10x170 Threaded rod A4 outdoor

Mounting tools on page 70

Check the instruction video

UNIQ SB-01 | INFO

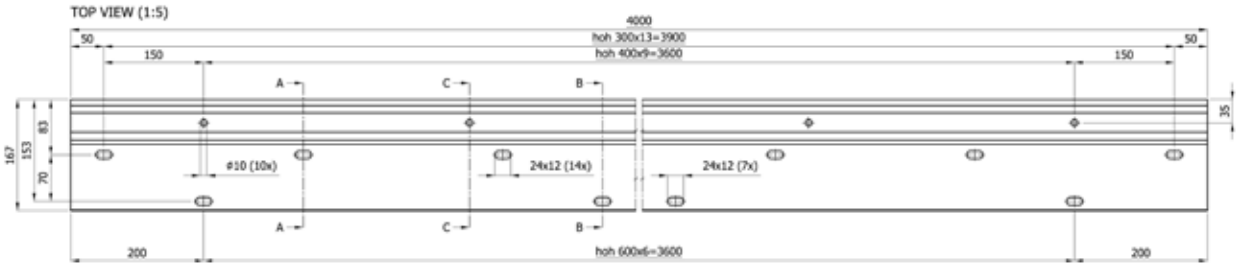

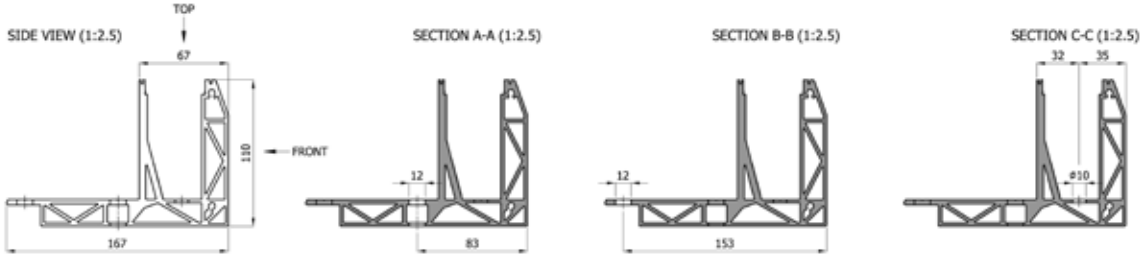

COVER FRONT
CF-100

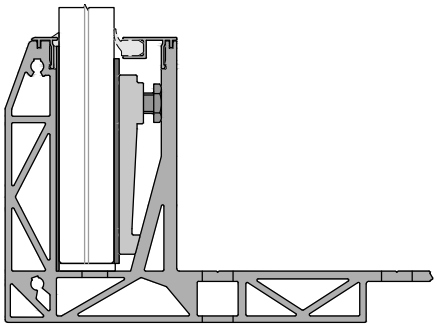

COVER FRONT
CF-103

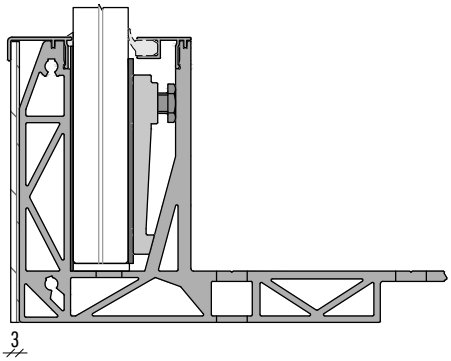

COVER FRONT
CF-112

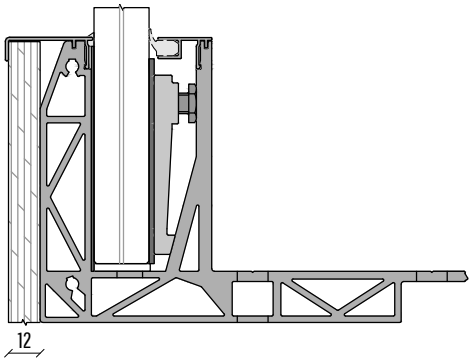

COVER FRONT
CF-120

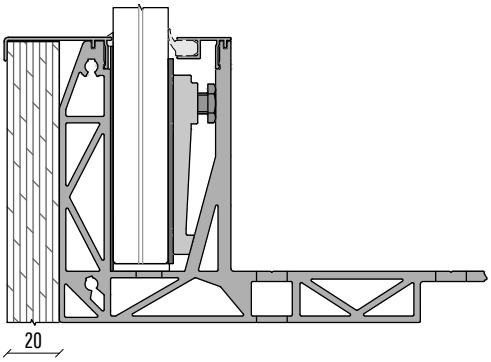

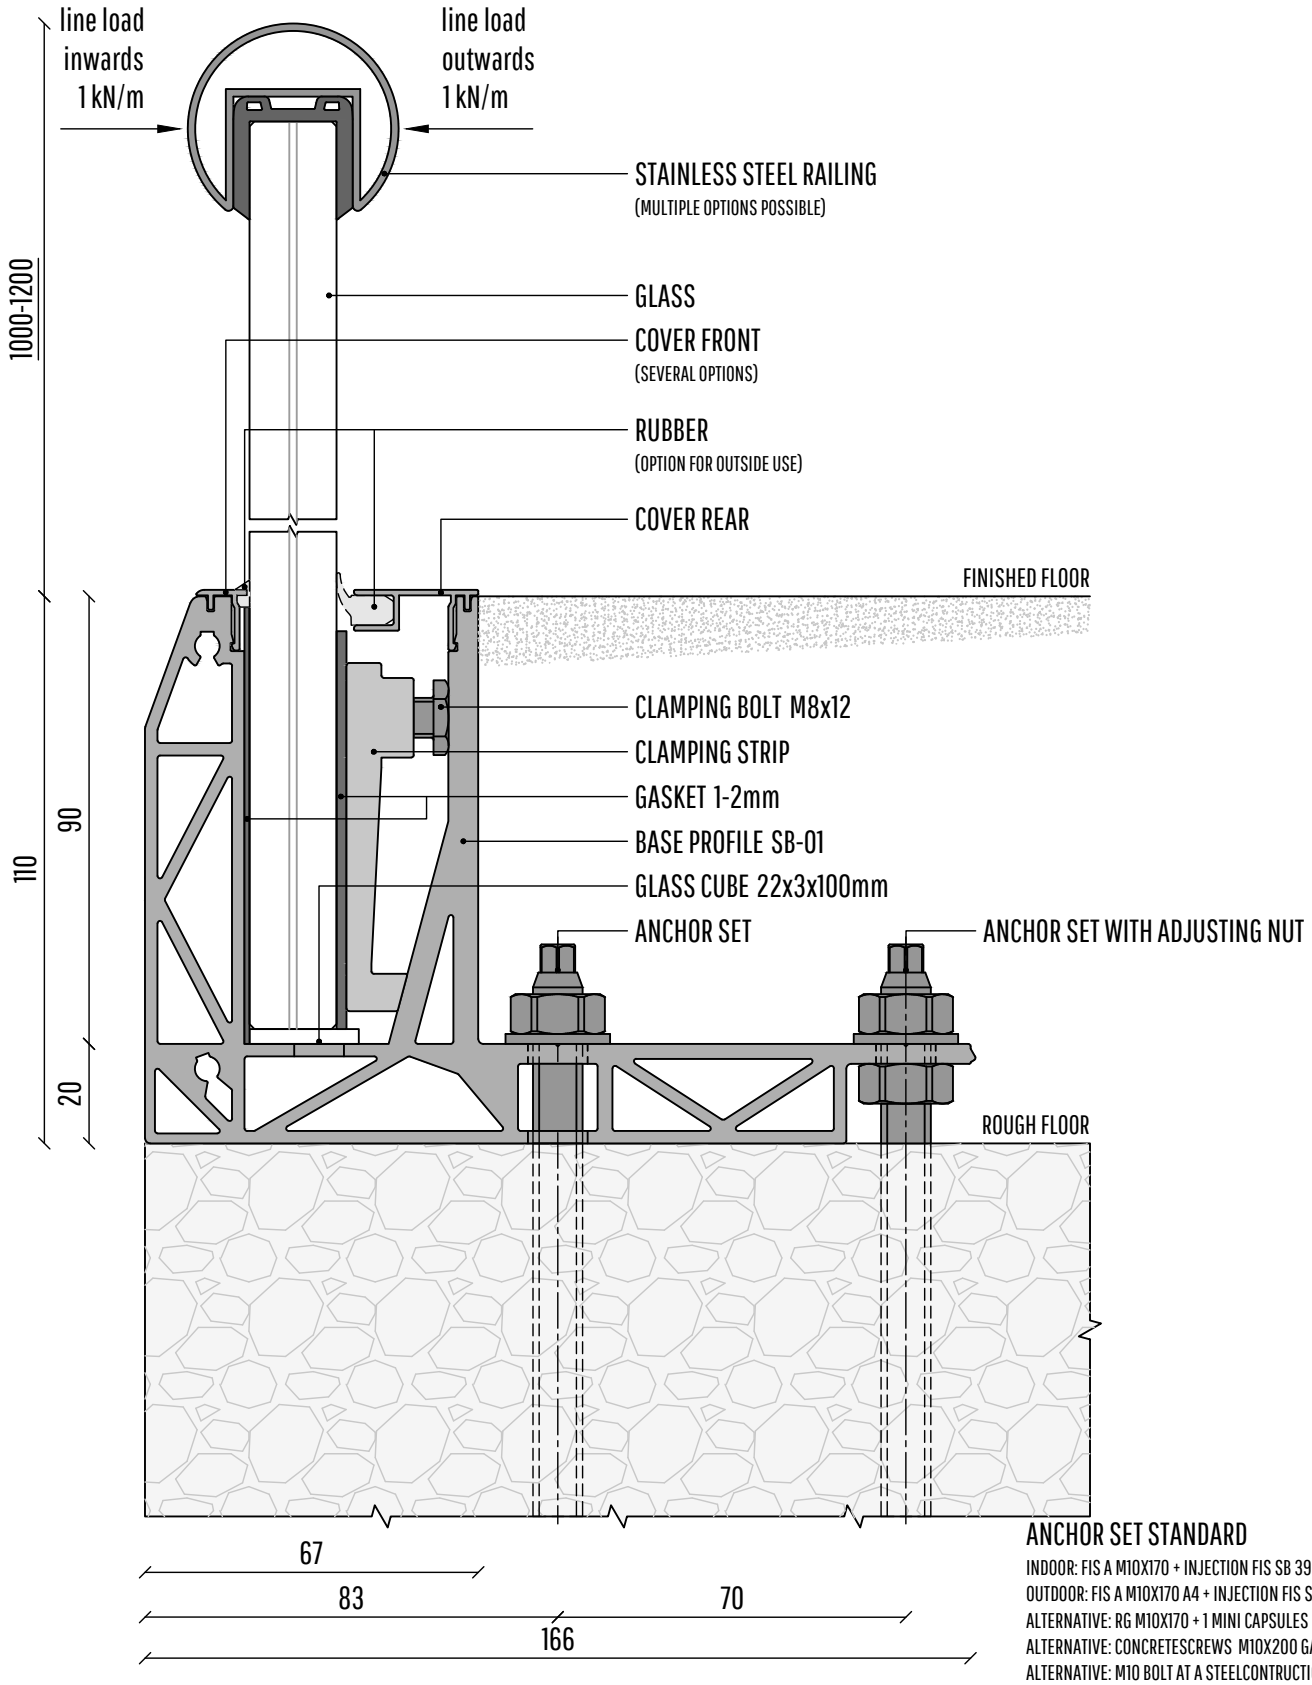

ANCHOR SET STANDARD

INDOOR: FIS A M10X170 + INJECTION FIS SB 390S
OUTDOOR: FIS A M10X170 A4 + INJECTION FIS SB 390S
ALTERNATIVE: RG M10X170 + 1 MINI CAPSULES RSB10
ALTERNATIVE: CONCRETESCREWS M10X200 GALVANIZED
ALTERNATIVE: M10 BOLT AT A STEELCONTRUCTION

UNIQ SB-O2 | TOP MONTAGE
2 kN/m

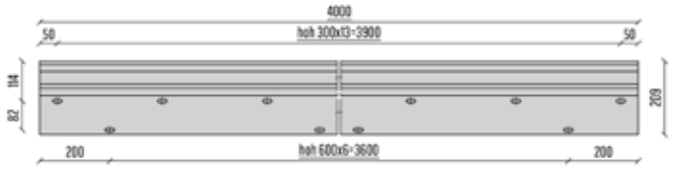

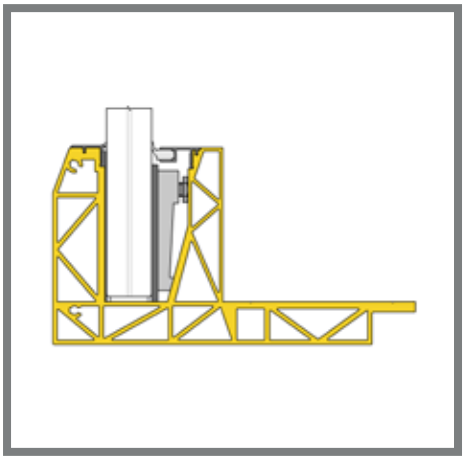





BASE PROFILE

		L
2089514	SB-O2 Brute	4000 mm
2089516	SB-O2 Stainless look	4000 mm

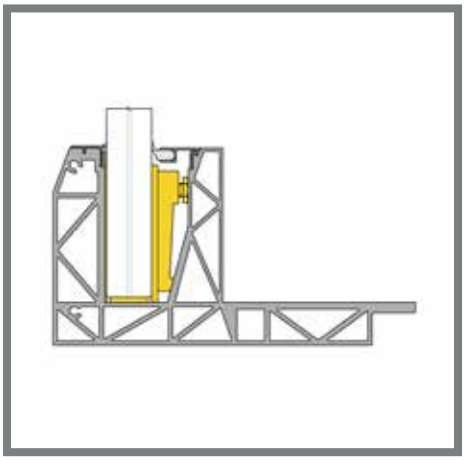



GLASS MOUNTING SET (GMS)

		L
2028356	GMS-L2 - 12/12/pvb	4000 mm
2028588	GMS-XXL3 - 10/10/pvb	4000 mm
2028588	GMS-XXL3 - 19	4000 mm

Content:
Clamping strip + glass blocks + required packing

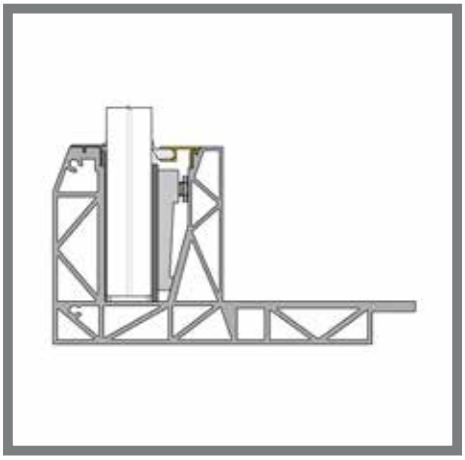





REAR COVER

		B	L
2089106	CR-XL1 - 12/12/pvb - Brute	25	4000 mm
2089359	CR-XL1 - 12/12/pvb - Stainless look	25	4000 mm
2089108	CR-XXL1 - 10/10/pvb - Brute	28	4000 mm
2089360	CR-XXL1 - 10/10/pvb - Stainless look	28	4000 mm
2089620	CR-XXL3 - 19 - Brute	31	4000 mm
2089622	CR-XXL3 - 19 - Stainless look	31	4000 mm

OPTIONAL FOR REAR COVER

		L
1012309	Rubber for the cover rear	1000 mm



FRONT COVER

		L
2089096	CF-300 Brute	4000 mm
2089354	CF-300 Stainless look	4000 mm

OPTIONAL FOR FRONT COVER

		L
1012311	Rubber for the cover front	1000 mm







PLATING COVERS

		D	B	L
2089098	CF-303 Brute	3	35	4000 mm
2089355	CF-303 Stainless look	3	35	4000 mm
2089100	CF-312 Brute	12	44	4000 mm
2089356	CF-312 Stainless look	12	44	4000 mm
2089102	CF-320 Brute	20	52	4000 mm
2089357	CF-320 Stainless look	20	52	4000 mm


end cover left



END COVERS

2090564	SB-O2 end cover left, Brute
2090554	SB-O2 end cover left, Stainless look
2090569	SB-O2 end cover right, Brute
2090559	SB-O2 end cover right, Stainless look

Small color differences between end caps and profiles are possible.







CORNER PIECES

2090632	SB-O2 Outside corner Brute
2090631	SB-O2 Outside corner Stainless look
2090630	SB-O2 Inside corner Brute
2090493	SB-O2 Inside corner Stainless look

fischer
innovative solutions

ANCHOR SB-O2

2008327	FISCHER injection mortar SB 390 S
2089149	FISCHER RSB 10 MINI capsule (alternative)
2089819	FISCHER RGM 10x170 Threaded rod indoor
2089820	FISCHER RGM 10x170 Threaded rod A4 outdoor

Mounting tools on page 70

Check the instruction video

UNIQ SB-02 | INFO

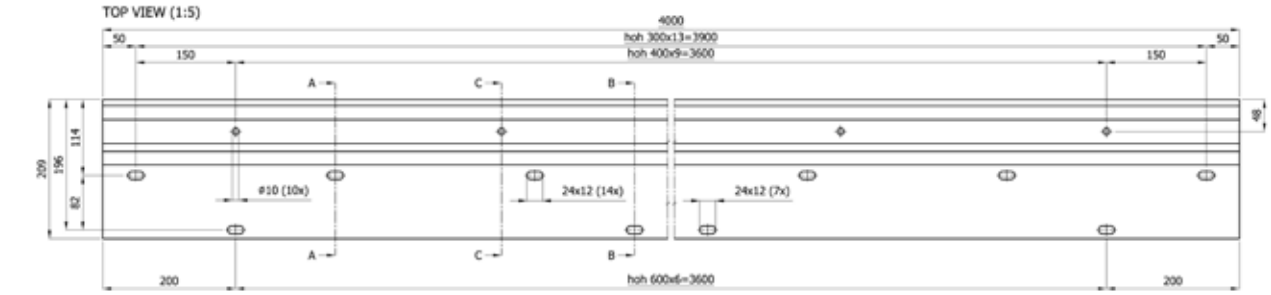

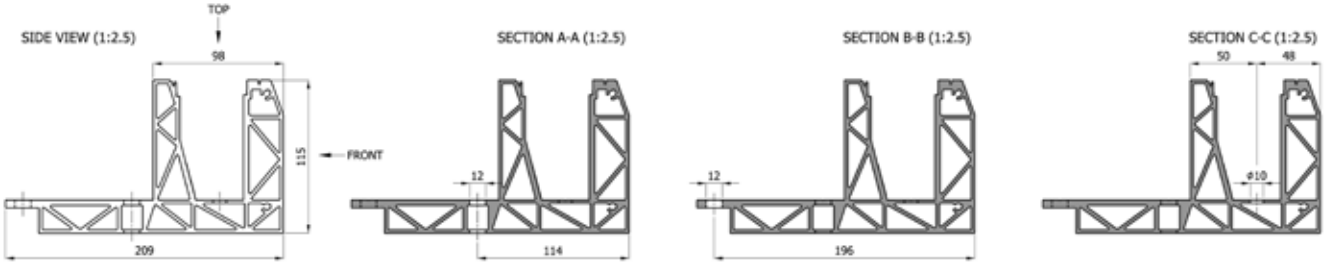

COVER FRONT
CF-300

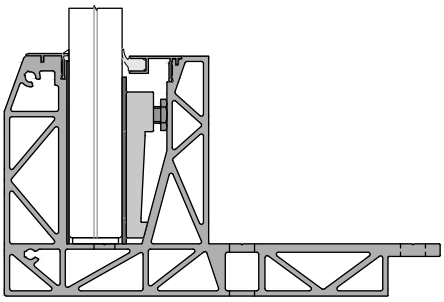

COVER FRONT
CF-303

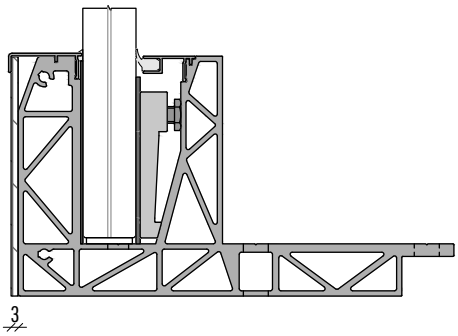

COVER FRONT
CF-312

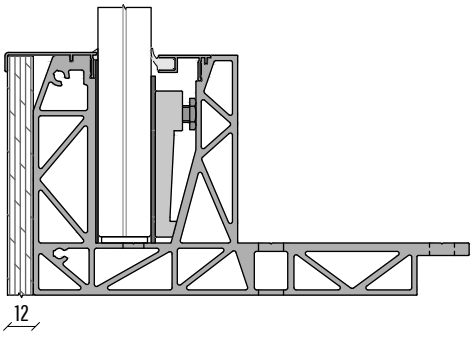

COVER FRONT
CF-320

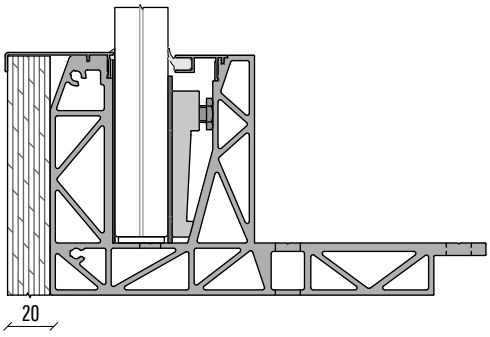

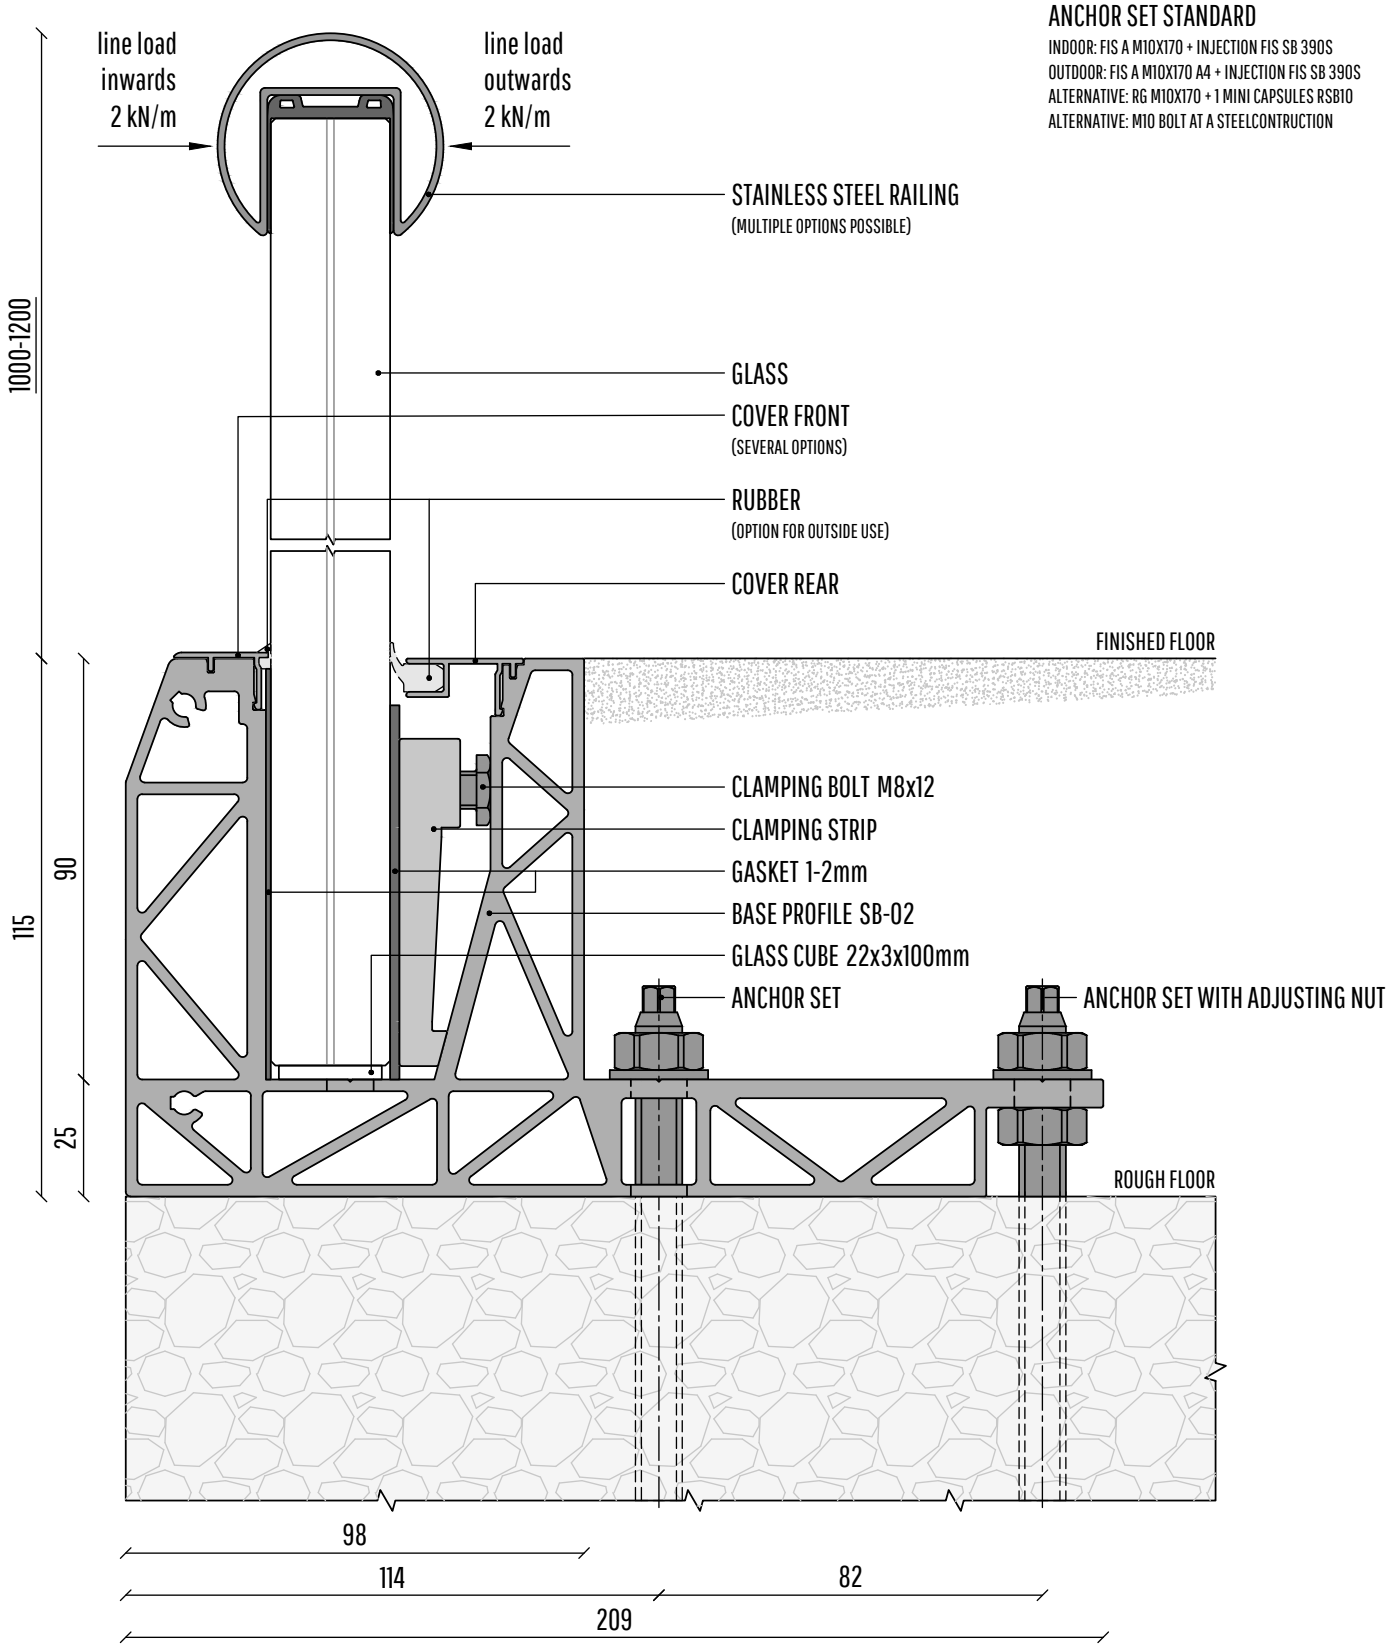

ANCHOR SET STANDARD

INDOOR: FIS A M10X170 + INJECTION FIS SB 390S
OUTDOOR: FIS A M10X170 A4 + INJECTION FIS SB 390S
ALTERNATIVE: RG M10X170 + 1 MINI CAPSULES RSB10
ALTERNATIVE: M10 BOLT AT A STEELCONTRUCTION

UNIQ SB-03 | TOP MONTAGE
3 kN/m

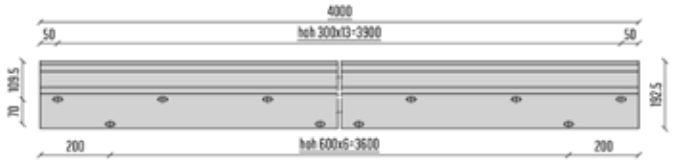

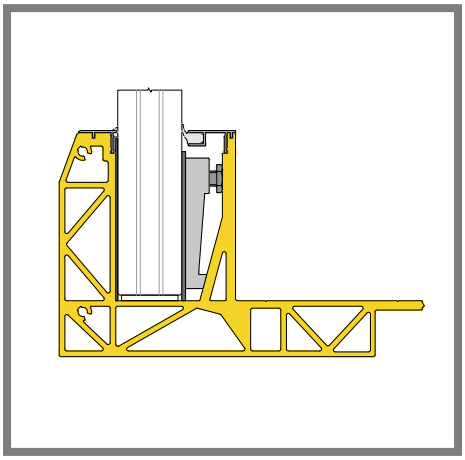





BASE PROFILE

		L
2089043	SB-O3 Brute	4000 mm
2089045	SB-O3 Stainless look	4000 mm

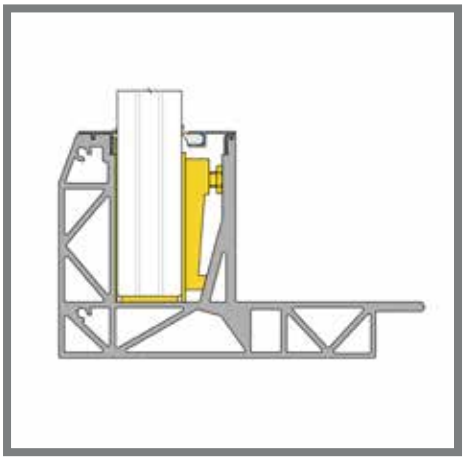



GLASS MOUNTING SET (GMS)

		L
2028527	GMS-XL3 - 12/12/pvb	4000 mm
2028527	GMS-XL3 - 8/8/8/pvb	4000 mm
2028420	GMS-L3 - 15/15/pvb	4000 mm
2028420	GMS-L3 - 10/10/10/pvb	4000 mm

Content:
Clamping strip + glass blocks + required packing

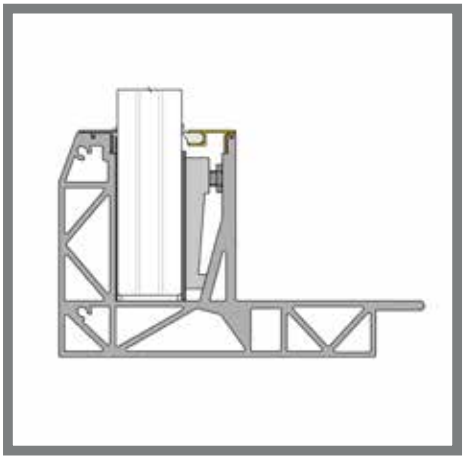





REAR COVER

		B	L
2089114	CR-XL3 - 12/12/pvb - Brute	33	4000 mm
2089363	CR-XL3 - 12/12/pvb - Stainless look	33	4000 mm
2089114	CR-XL3 - 8/8/8/pvb - Brute	33	4000 mm
2089363	CR-XL3 - 8/8/8/pvb - Stainless look	33	4000 mm
2089112	CR-L3 - 15/15/pvb - Brute	27	4000 mm
2089362	CR-L3 - 15/15/pvb - Stainless look	27	4000 mm
2089112	CR-L3 - 10/10/10/pvb - Brute	27	4000 mm
2089362	CR-L3 - 10/10/10/pvb - Stainless look	27	4000 mm

OPTIONAL FOR REAR COVER

		L
1012309	Rubber for the cover rear	1000 mm



FRONT COVER

		L
2089096	CF-300 Brute	4000 mm
2089354	CF-300 Stainless look	4000 mm

OPTIONAL FOR FRONT COVER

		L
1012311	Rubber for the cover front	1000 mm





PLATING COVERS

		D	B	L
2089098	CF-303 Brute	3	35	4000 mm
2089355	CF-303 Stainless look	3	35	4000 mm
2089100	CF-312 Brute	12	44	4000 mm
2089356	CF-312 Stainless look	12	44	4000 mm
2089102	CF-320 Brute	20	52	4000 mm
2089357	CF-320 Stainless look	20	52	4000 mm


end cover left



END COVERS

2090565	SB-O3 end cover left, Brute
2090555	SB-O3 end cover left, Stainless look
2090570	SB-O3 end cover right, Brute
2090560	SB-O3 end cover right, Stainless look

Small color differences between end caps and profiles are possible.







CORNER PIECES

2090636	SB-O3 Outside corner Brute
2090494	SB-O3 Outside corner Stainless look
2090634	SB-O3 Inside corner Brute
2090495	SB-O3 Inside corner Stainless look

fischer
innovative solutions

ANCHOR SB-03

2008327	FISCHER injection mortar SB 390 S
2089149	FISCHER RSB 10 MINI capsule (alternative)
2089141	FISCHER RGM 10x200 Threaded rod indoor
2089144	FISCHER RGM 10x200 Threaded rod A4 outdoor

Check the instruction video

Mounting tools on page 70

UNIQ SB-03 | INFO

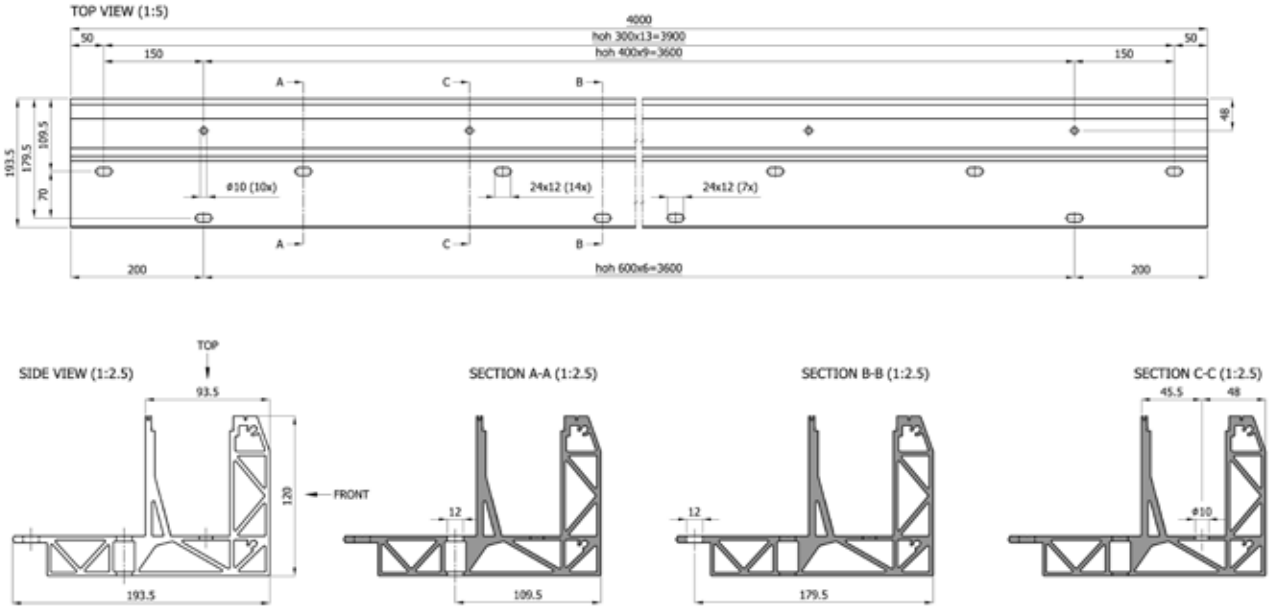

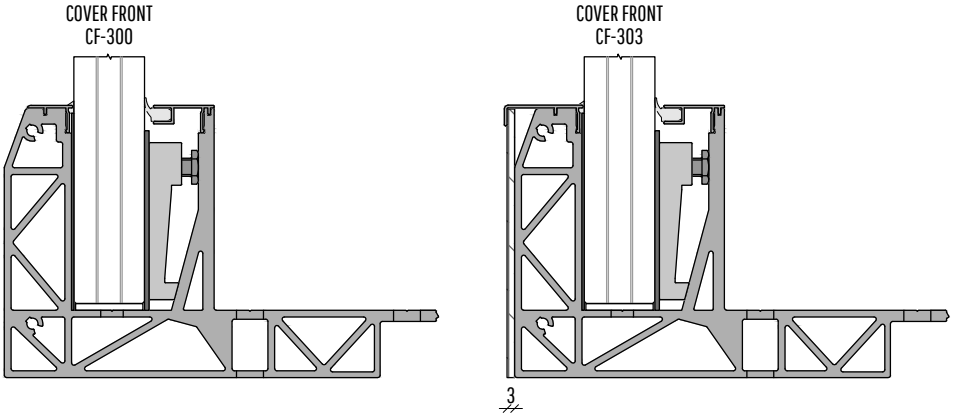

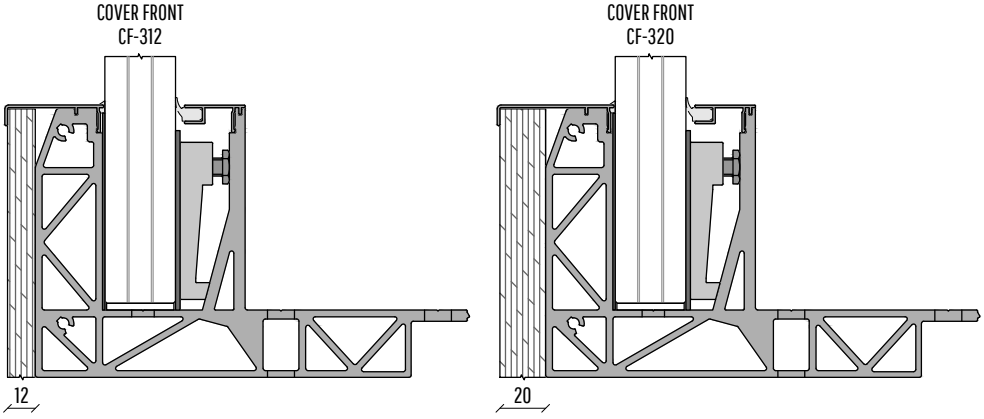

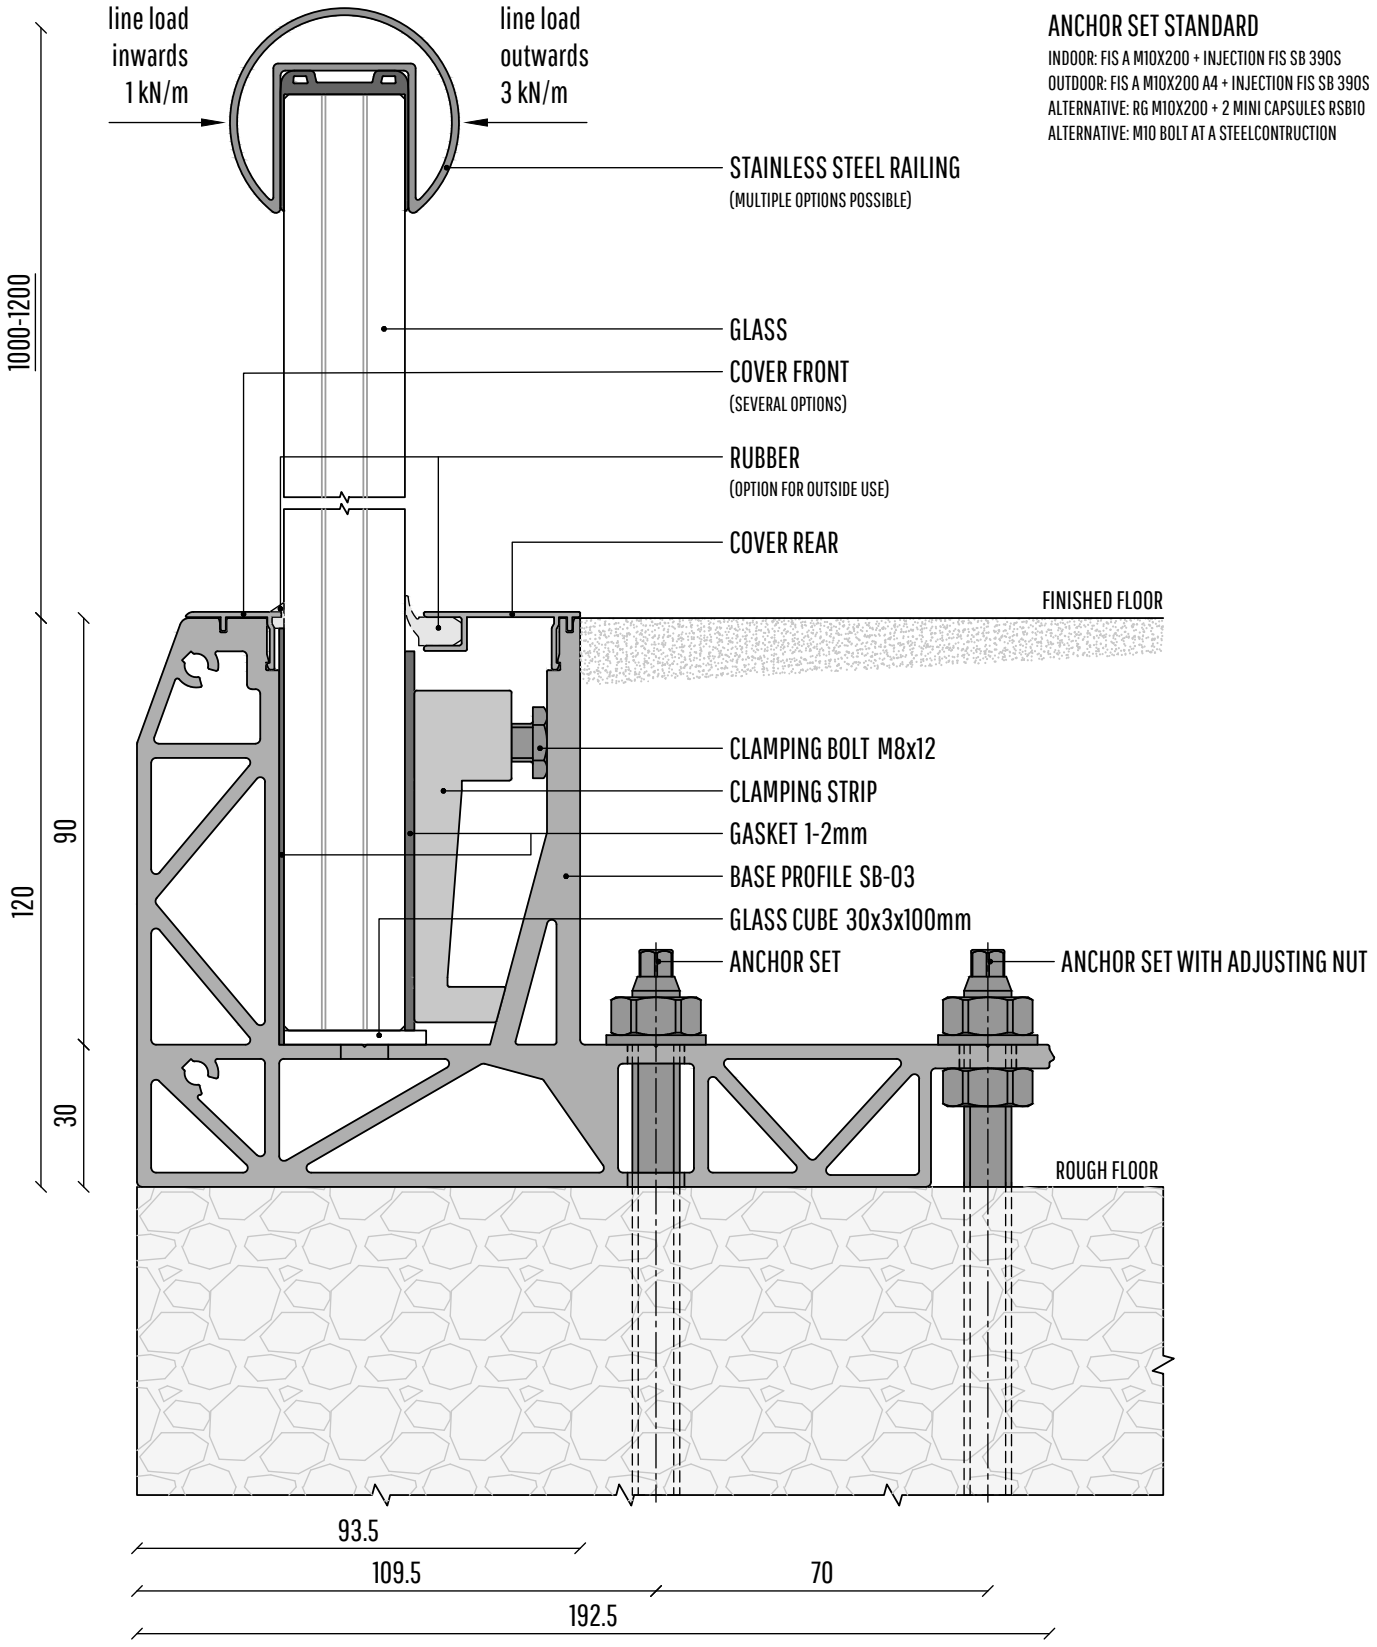

ANCHOR SET STANDARD

INDOOR: FIS A M10X200 + INJECTION FIS SB 390S
OUTDOOR: FIS A M10X200 A4 + INJECTION FIS SB 390S
ALTERNATIVE: RG M10X200 + 2 MINI CAPSULES RSB10
ALTERNATIVE: M10 BOLT AT A STEELCONTRUCTION

UNIQ SB-A1 | SIDE MOUNTED
1 kN/m

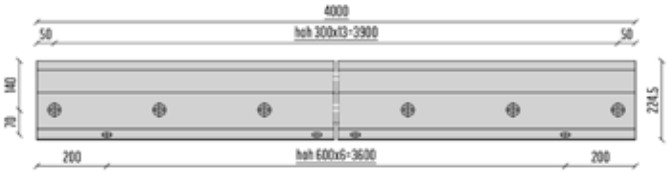

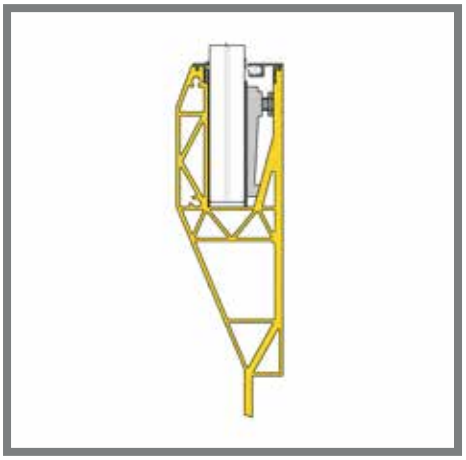





BASE PROFILE

		L
2089122	SB-A1 Brute	4000 mm
2062745	SB-A1 Stainless look	4000 mm

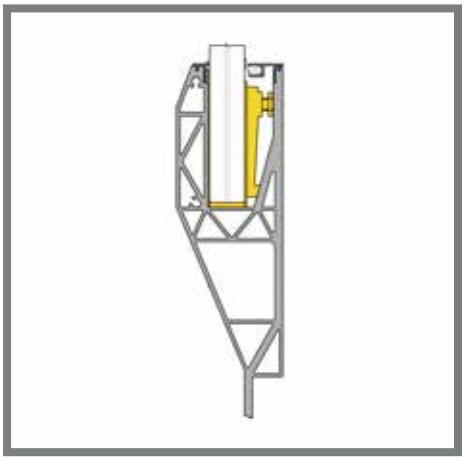



GLASS MOUNTING SET (GMS)

		L
2020151	GMS-L1- 10/10/pvb	4000 mm
2028329	GMS-XL1 - 8/8/pvb	4000 mm
2028334	GMS-XXL1 - 15	4000 mm

Content:
Clamping strip + glass blocks + required packing

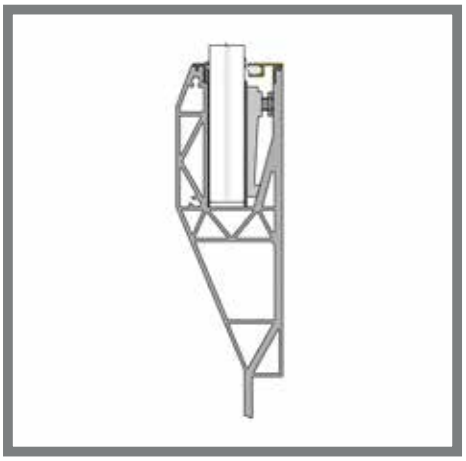





REAR COVER

		B	L
2089104	CR-L1 - 10/10/pvb - Brute	21	4000 mm
2089358	CR-L1 - 10/10/pvb - Stainless look	21	4000 mm
2089106	CR-XL1 - 8/8/pvb - Brute	25	4000 mm
2089359	CR-XL1 - 8/8/pvb - Stainless look	25	4000 mm
2089108	CR-XXL1 - 15 - Brute	28	4000 mm
2089360	CR-XXL1 - 15 - Stainless look	28	4000 mm

OPTIONAL FOR REAR COVER

		L
1012309	Rubber for the cover rear	1000 mm





FRONT COVER

		L
2089088	CF-100 Brute	4000 mm
2089350	CF-100 Stainless look	4000 mm

OPTIONAL FOR FRONT COVER

		L
1012311	Rubber for the cover front	1000 mm



PLATING COVERS

		D	B	L
2089090	CF-103 Brute	3	25	4000 mm
2089351	CF-103 Stainless look	3	25	4000 mm
2089092	CF-112 Brute	12	34	4000 mm
2089352	CF-112 Stainless look	12	34	4000 mm
2089094	CF-120 Brute	20	42	4000 mm
2089353	CF-120 Stainless look	20	42	4000 mm





END COVERS

2033429	SB-A1 end cover left, Brute
2033433	SB-A1 end cover left, Stainless look
2033432	SB-A1 end cover right, Brute
2033434	SB-A1 end cover right, Stainless look

Small color differences between end caps and profiles are possible.







CORNER PIECES

2090606	SB-A1 Outside corner Brute
2090484	SB-A1 Outside corner Stainless look
2090602	SB-A1 Inside corner Brute
2090485	SB-A1 Inside corner Stainless look





COVERCAP CC

2089065	COVERCAP CC-225 Brute
2089067	COVERCAP CC-225 Stainless look

Check the instruction video

ANCHOR SB-A1

2008327	FISCHER injection mortar SB 390 S
2089149	FISCHER RSB 10 MINI capsule (alternative)
2089142	FIS A M 10x150 Threaded rod indoor
2089814	FIS A M 10x150 Threaded rod A4 outdoor

UNIQ SB-A1 | INFO

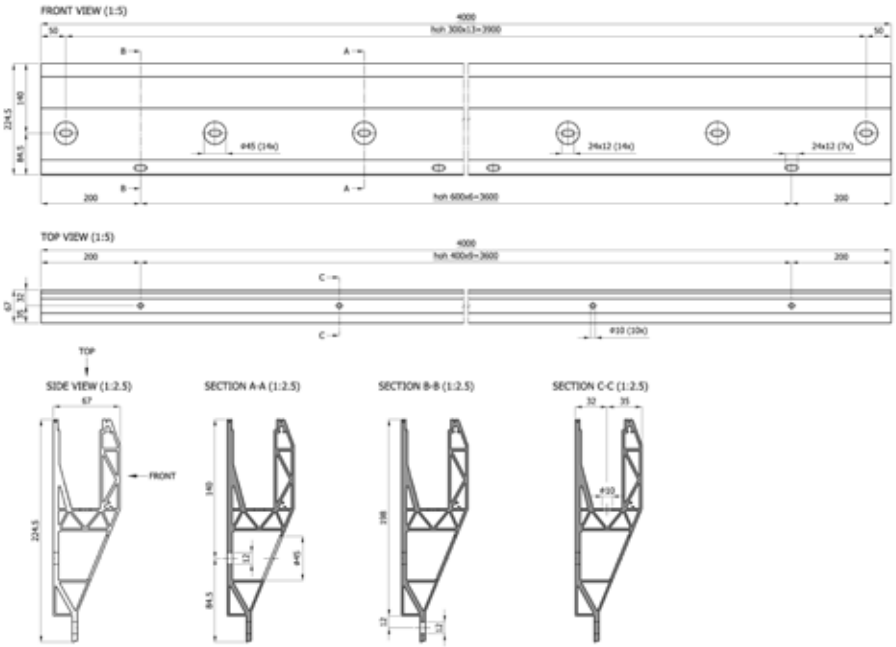

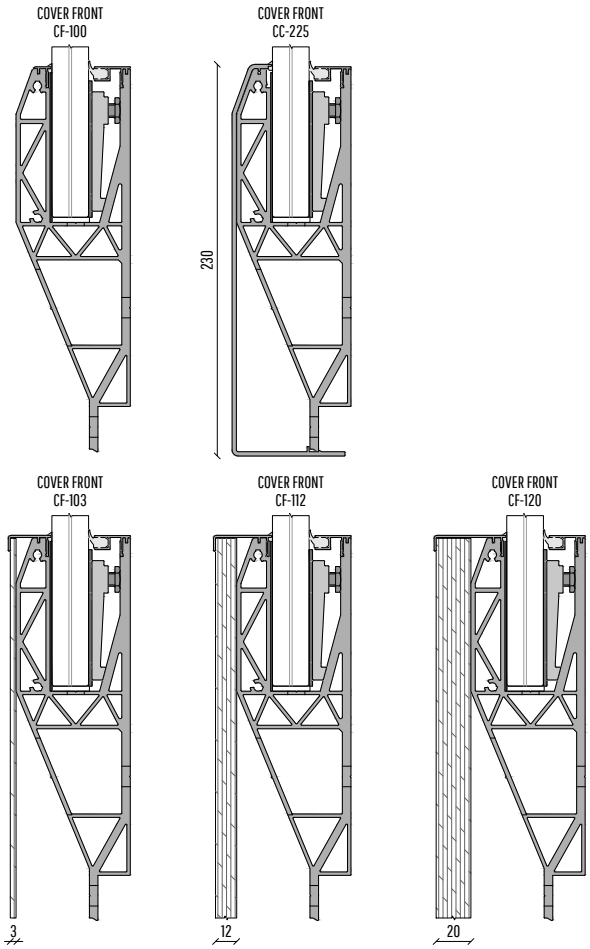

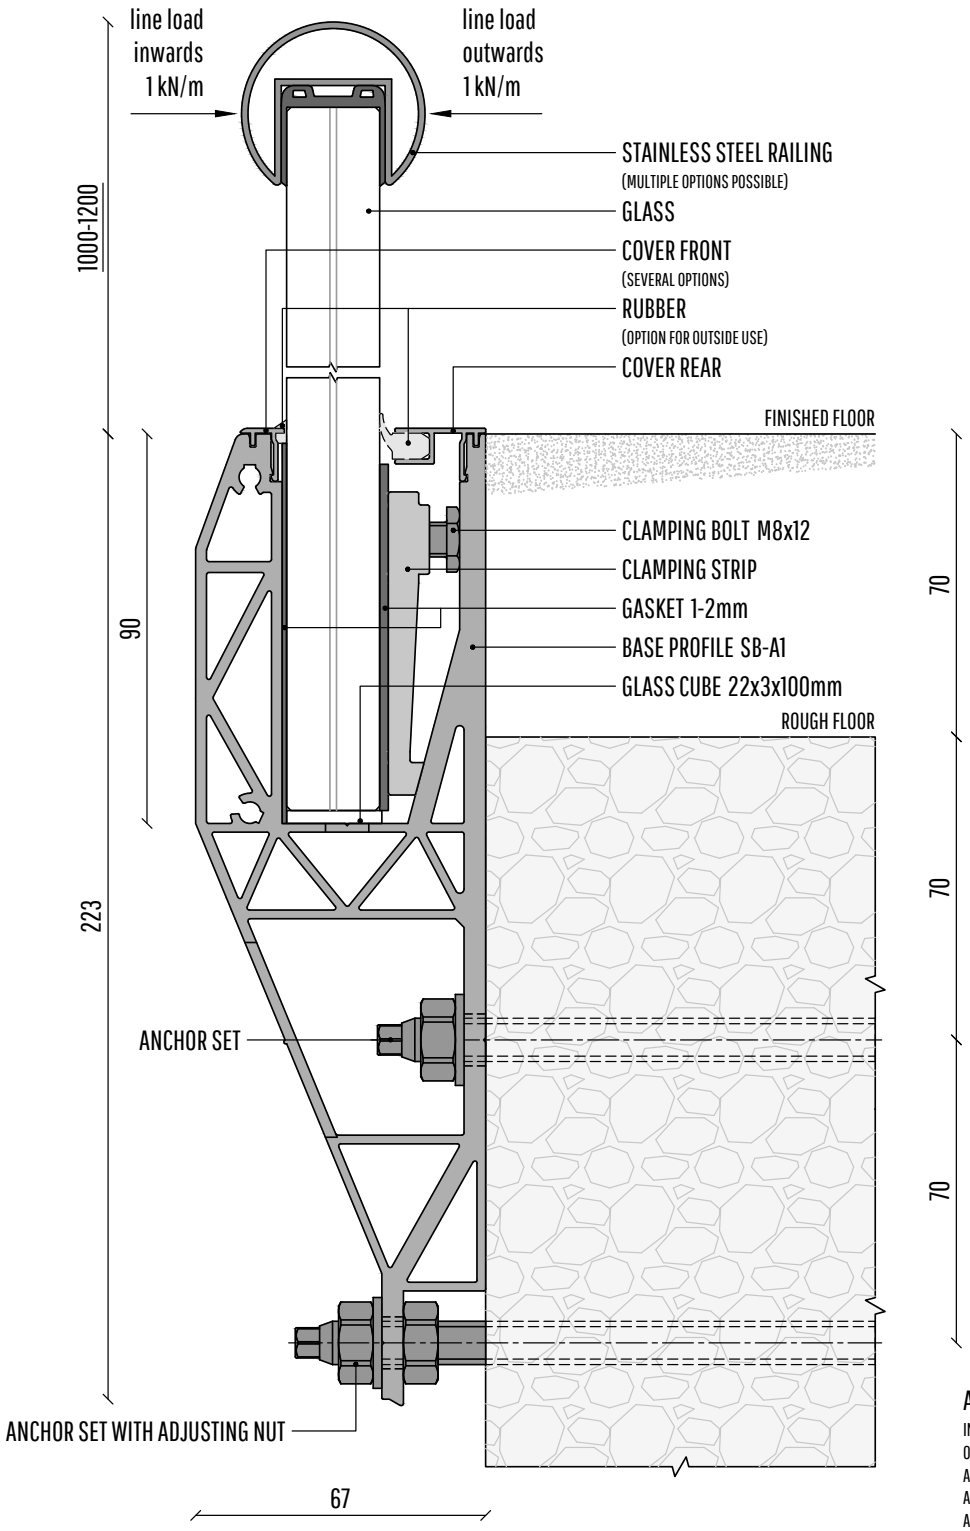

ANCHOR SET STANDARD

INDOOR: FIS A M10X150 + INJECTION FIS SB 390S
OUTDOOR: FIS A M10X150 A4+ INJECTION FIS SB 390S
ALTERNATIVE: RG M10X150 + 2 MINI CAPSULES RSB10
ALTERNATIVE: CONCRETESCREWS M10X160 GALVANIZED
ALTERNATIVE: M10 BOLT AT A STEELCONTRUCTION

UNIQ SB-A2 | SIDE MOUNTED
2 kN/m

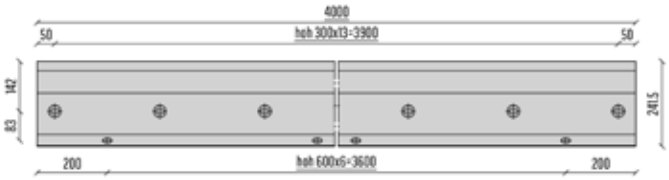

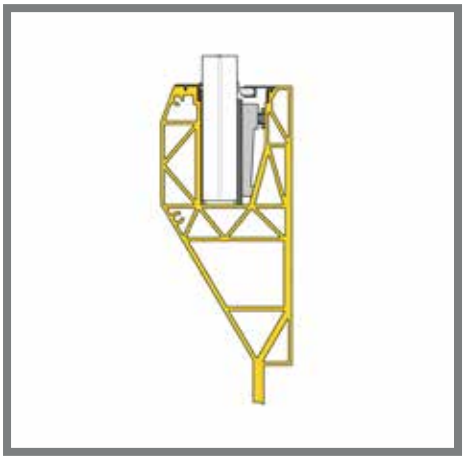





BASE PROFILE

		L
2004963	SB-A2 Brute	4000 mm
2001315	SB-A2 Stainless look	4000 mm

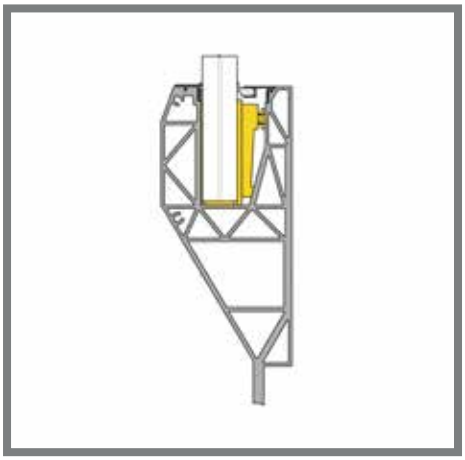



GLASS MOUNTING SET (GMS)

		L
2028356	GMS-L2- 12/12/pvb	4000 mm
2028588	GMS-XXL3 - 10/10/pvb	4000 mm
2028588	GMS-XXL3 - 19	4000 mm

Content:
Clamping strip + glass blocks + required packing

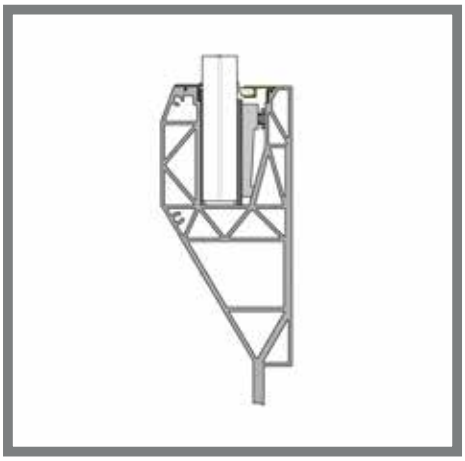





REAR COVER

		B	L
2089106	CR-XL1 - 12/12/pvb - Brute	25	4000 mm
2089359	CR-XL1 - 12/12/pvb - Stainless look	25	4000 mm
2089108	CR-XXL1 - 10/10/pvb - Brute	28	4000 mm
2089360	CR-XXL1 - 10/10/pvb - Stainless look	28	4000 mm
2089620	CR-XXL3 - 19 - Brute	31	4000 mm
2089622	CR-XXL3 - 19 - Stainless look	31	4000 mm

OPTIONAL FOR REAR COVER

		L
1012309	Rubber for the cover rear	1000 mm



FRONT COVER

		L
2089096	CF-300 Brute	4000 mm
2089354	CF-300 Stainless look	4000 mm

OPTIONAL FOR FRONT COVER

		L
1012311	Rubber for the cover front	1000 mm







PLATING COVERS

		D	B	L
2089098	CF-303 Brute	3	35	4000 mm
2089355	CF-303 Stainless look	3	35	4000 mm
2089100	CF-312 Brute	12	44	4000 mm
2089356	CF-312 Stainless look	12	44	4000 mm
2089102	CF-320 Brute	20	52	4000 mm
2089357	CF-320 Stainless look	20	52	4000 mm





END COVERS

2090566	SB-A2 end cover left, Brute
2090556	SB-A2 end cover left, Stainless look
2090571	SB-A2 end cover right, Brute
2090561	SB-A2 end cover right, Stainless look

Small color differences between end caps and profiles are possible.







CORNER PIECES

2090612	SB-A2 Outside corner Brute
2090486	SB-A2 Outside corner Stainless look
2090610	SB-A2 Inside corner Brute
2090487	SB-A2 Inside corner Stainless look



COVERCAP CC

2089509	COVERCAP CC-240 Brute
2089511	COVERCAP CC-240 Stainless look

Check the instruction video

ANCHOR SB-A2

2008327	FISCHER injection mortar SB 390 S6
2089149	FISCHER RSB 10 MINI capsule (alternative)
2089140	FIS A M 12x210 Threaded rod indoor
2089813	FIS A M 12x210 Threaded rod A4 outdoor

UNIQ SB-A2 | INFO

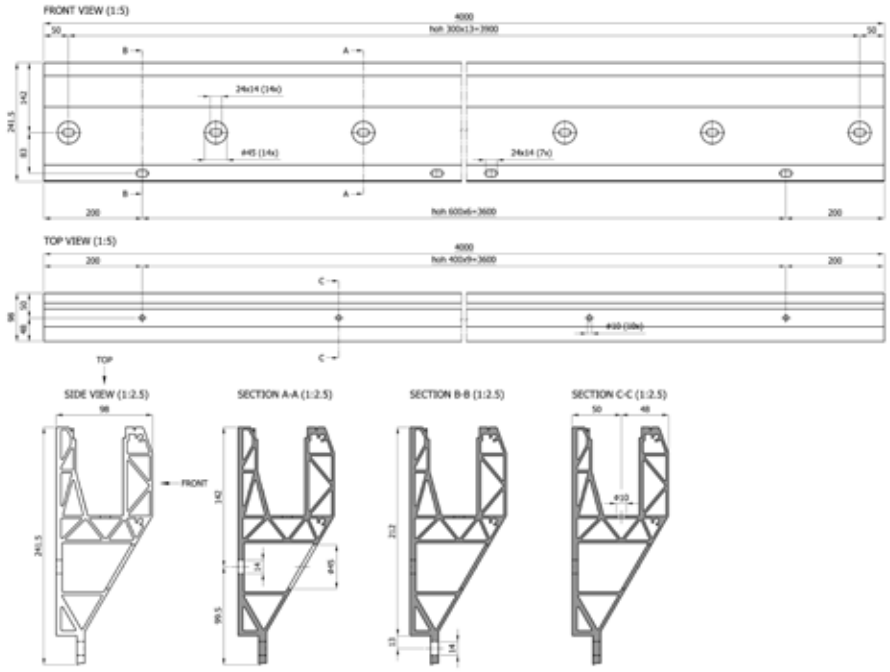

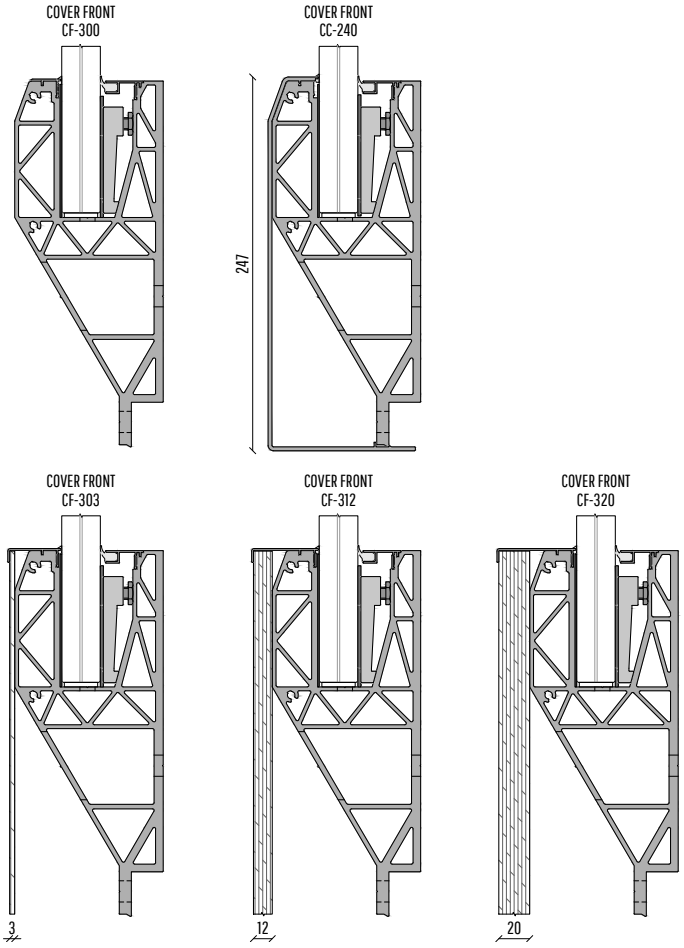

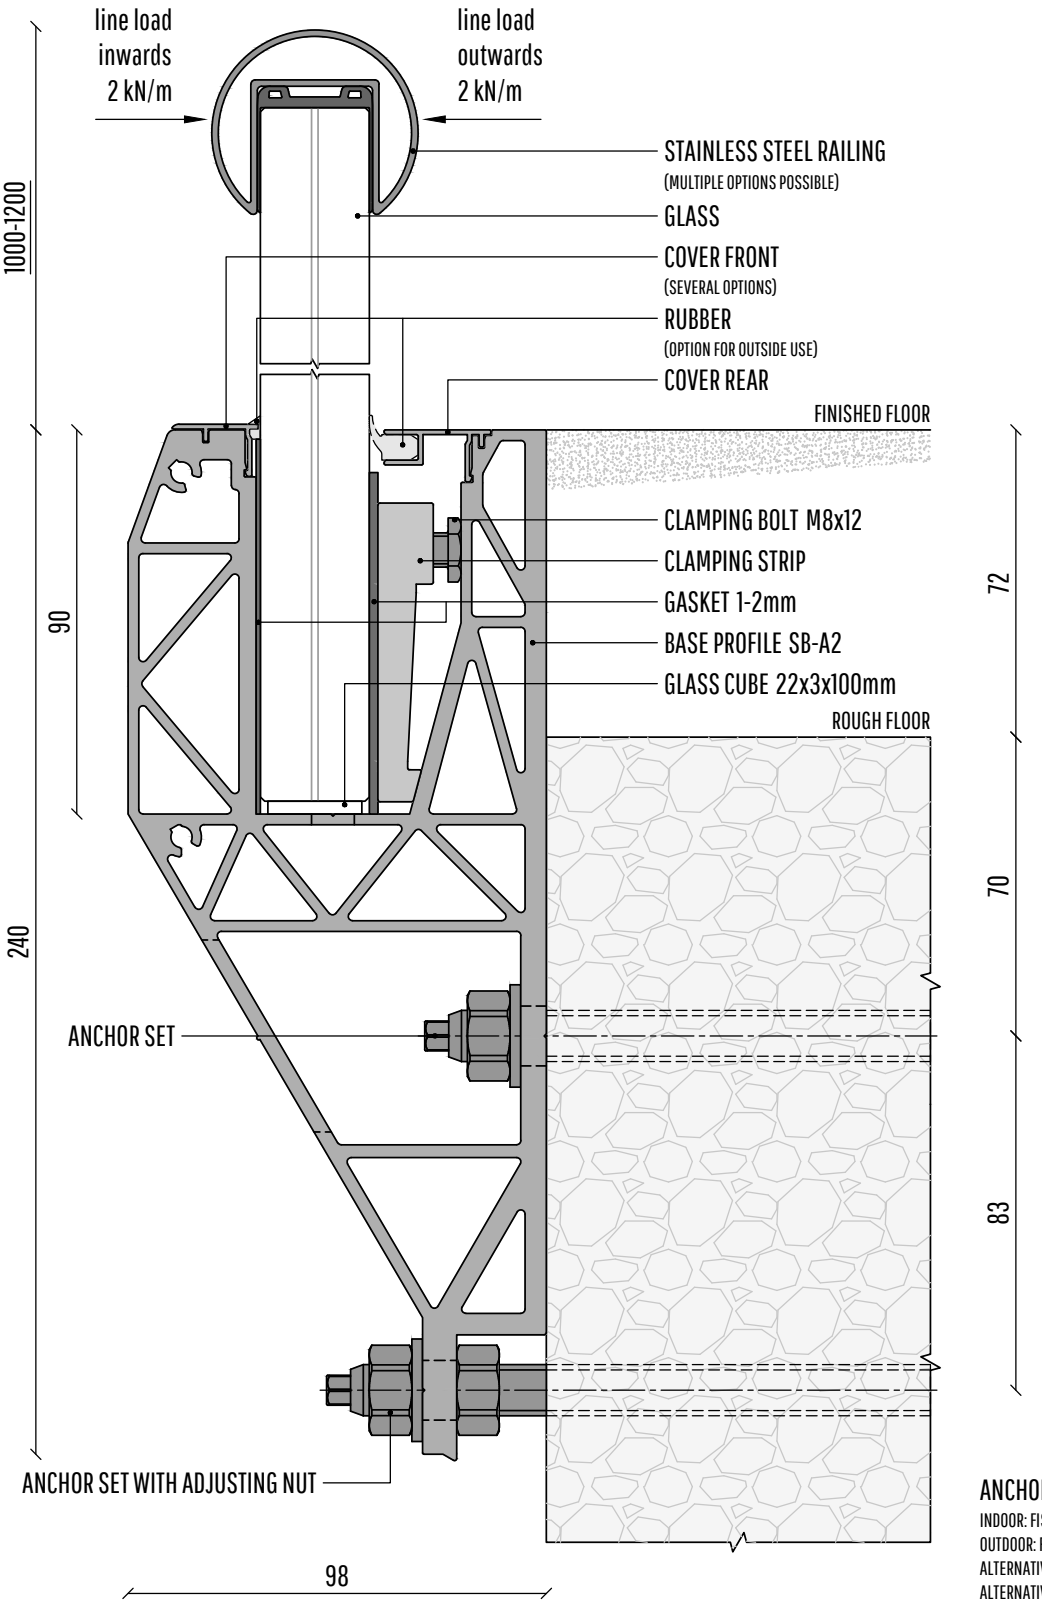

ANCHOR SET STANDARD

INDOOR: FIS A M12X210 + INJECTION FIS SB 390S
OUTDOOR: FIS A M12X210 A4 + INJECTION FIS SB 390S
ALTERNATIVE: RG M12X210 + 2 MINI CAPSULES RSB10
ALTERNATIVE: M12 BOLT AT A STEELCONTRUCTION

UNIQ SB-A3 | SIDE MOUNTED
3 kN/m

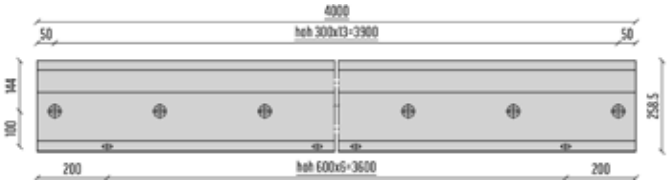

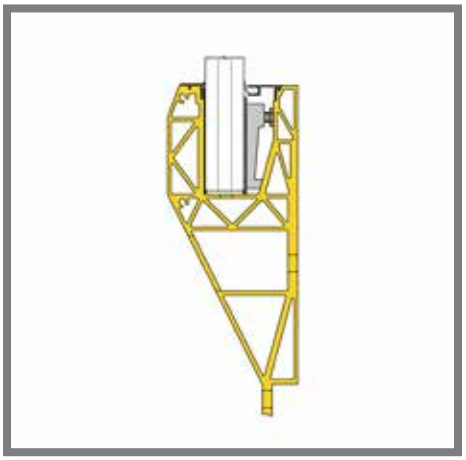





BASE PROFILE

		L
2089512	SB-A3 Brute	4000 mm
2089513	SB-A3 Stainless look	4000 mm

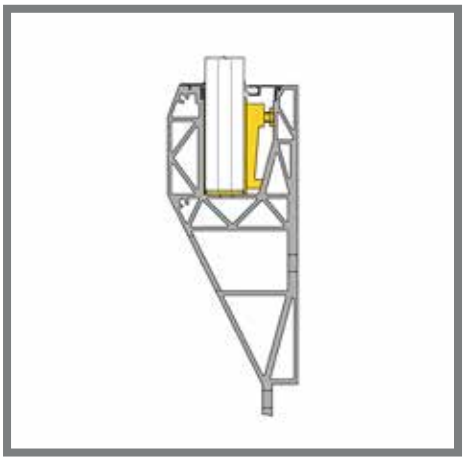



GLASS MOUNTING SET (GMS)

		L
2028527	GMS-XL3 - 12/12/pvb	4000 mm
2028527	GMS-XL3 - 8/8/8/pvb	4000 mm
2028420	GMS-L3 - 15/15/pvb	4000 mm
2028420	GMS-L3 - 10/10/10/pvb	4000 mm

Content:
Clamping strip + glass blocks + required packing

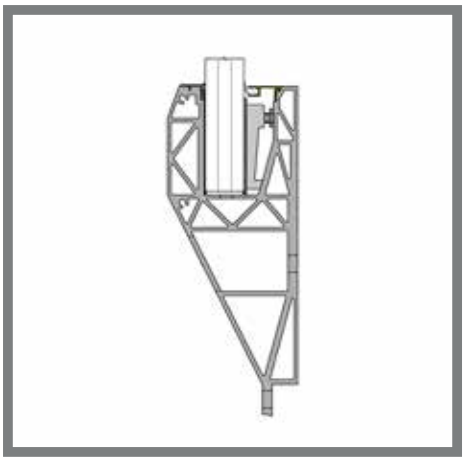





REAR COVER

		B	L
2089114	CR-XL3 - 12/12/pvb - Brute	33	4000 mm
2089363	CR-XL3 - 12/12/pvb - Stainless look	33	4000 mm
2089114	CR-XL3 - 8/8/8/pvb - Brute	33	4000 mm
2089363	CR-XL3 - 8/8/8/pvb - Stainless look	33	4000 mm
2089112	CR-L3 - 15/15/pvb - Brute	27	4000 mm
2089362	CR-L3 - 15/15/pvb - Stainless look	27	4000 mm
2089112	CR-L3 - 10/10/10/pvb - Brute	27	4000 mm
2089362	CR-L3 - 10/10/10/pvb - Stainless look	27	4000 mm

OPTIONAL FOR REAR COVER

		L
1012309	Rubber for the cover rear	1000 mm



FRONT COVER

		L
2089096	CF-300 Brute	4000 mm
2089354	CF-300 Stainless look	4000 mm

OPTIONAL FOR FRONT COVER

		L
1012311	Rubber for the cover front	1000 mm







PLATING COVERS

		D	B	L
2089098	CF-303 Brute	3	35	4000 mm
2089355	CF-303 Stainless look	3	35	4000 mm
2089100	CF-312 Brute	12	44	4000 mm
2089356	CF-312 Stainless look	12	44	4000 mm
2089102	CF-320 Brute	20	52	4000 mm
2089357	CF-320 Stainless look	20	52	4000 mm





END COVERS

2090567	SB-A3 end cover left, Brute
2090557	SB-A3 end cover left, Stainless look
2090572	SB-A3 end cover right, Brute
2090562	SB-A3 end cover right, Stainless look

Small color differences between end caps and profiles are possible.







CORNER PIECES

2090616	SB-A3 Outside corner Brute
2090488	SB-A3 Outside corner Stainless look
2090614	SB-A3 Inside corner Brute
2090489	SB-A3 Inside corner Stainless look





COVERCAP CC

2089081	COVERCAP CC-260 Brute
2089083	COVERCAP CC-260 Stainless look

Check the instruction video

ANCHOR SB-A3

2008327	FISCHER injection mortar SB 390 S
2089149	FISCHER RSB 10 MINI capsule (alternative)
2089140	FIS A M 12x210 Threaded rod indoor
2089813	FIS A M 12x210 Threaded rod A4 outdoor

UNIQ SB-A3 | INFO

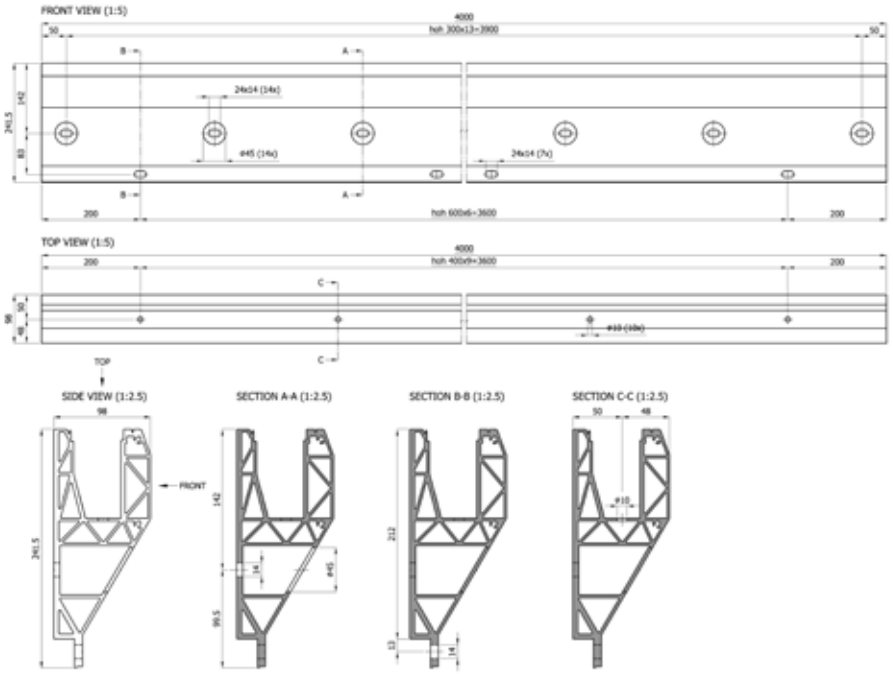

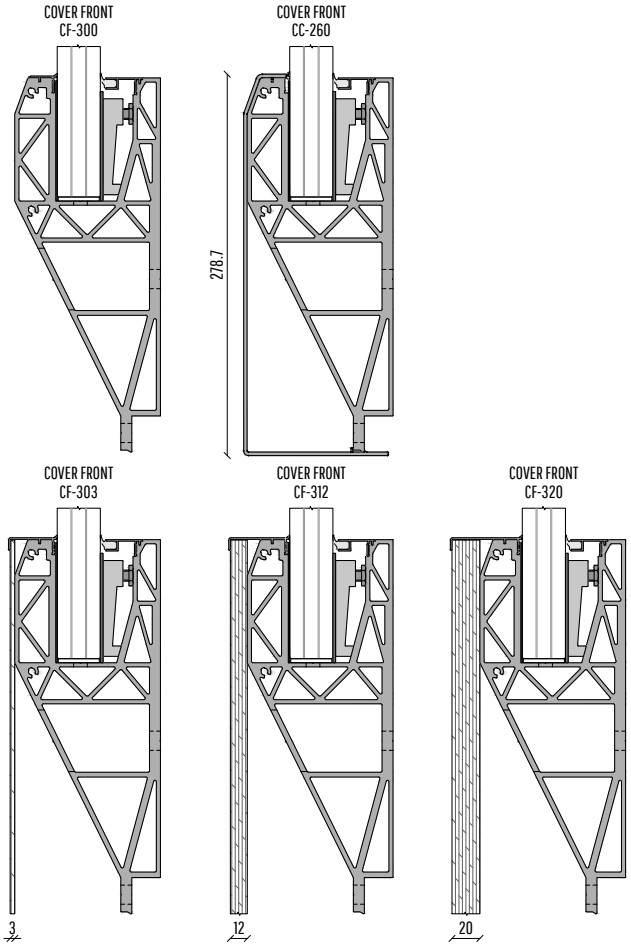

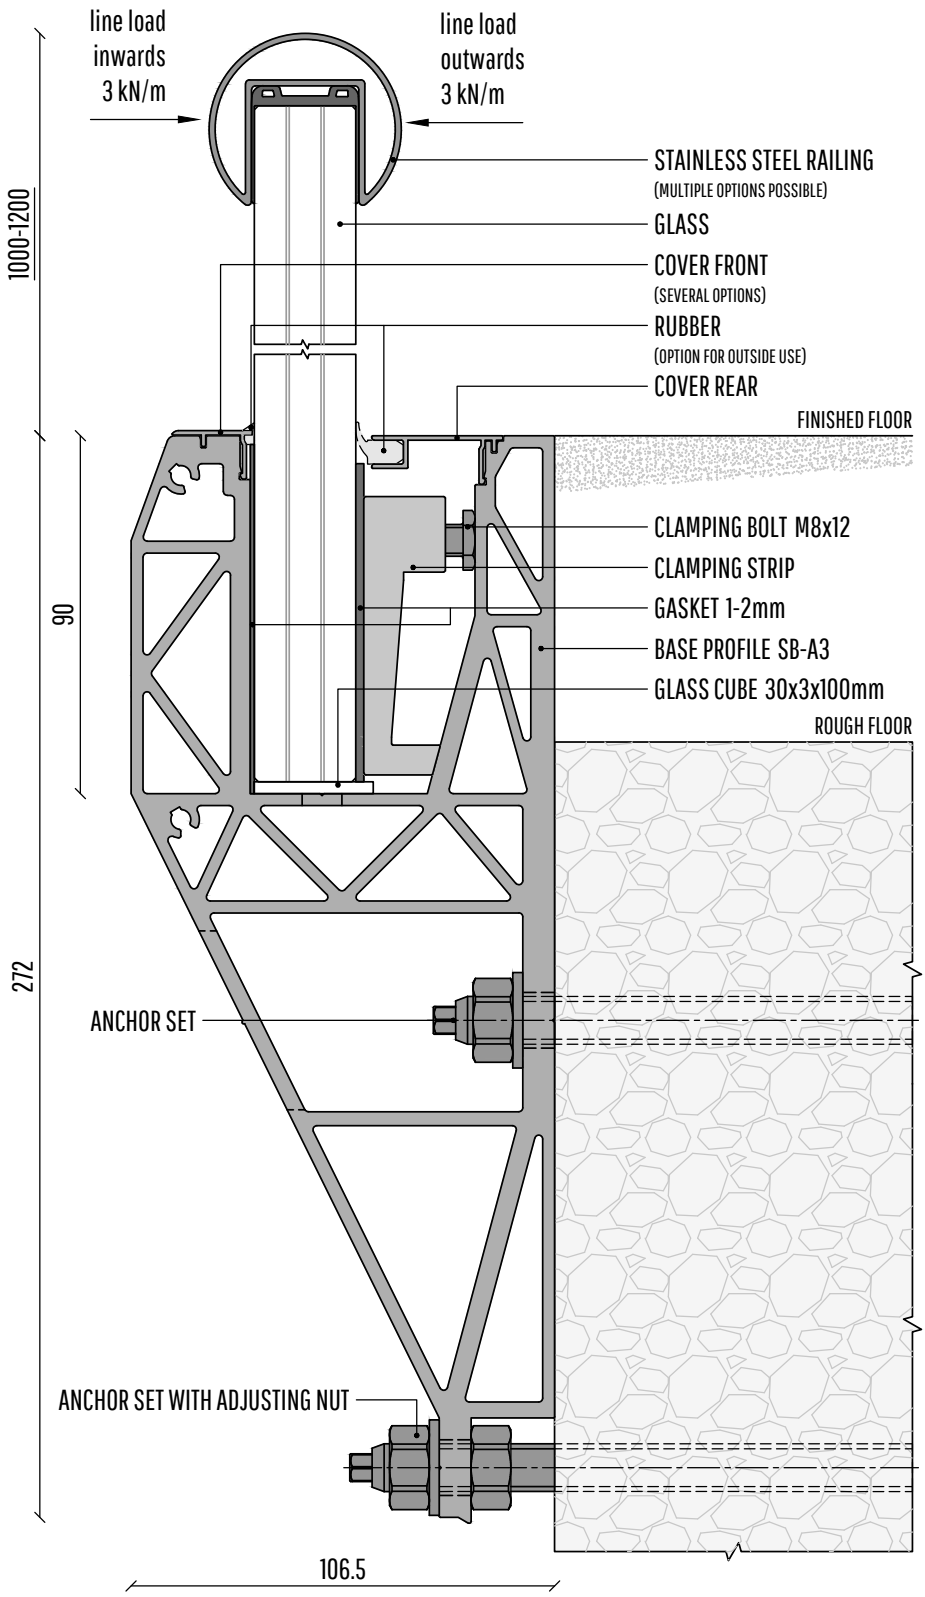

ANCHOR SET STANDARD

INDOOR: FIS A M12X210 + INJECTION FIS SB 390S
OUTDOOR: FIS A M12X210 A4 + INJECTION FIS SB 390S
ALTERNATIVE: RG M12X210 + 2 MINI CAPSULES RSB10
ALTERNATIVE: M12 BOLT AT A STEELCONTRUCTION

UNIQ SB-O 0.5S | TOP MONTAGE
0.5 kN/m



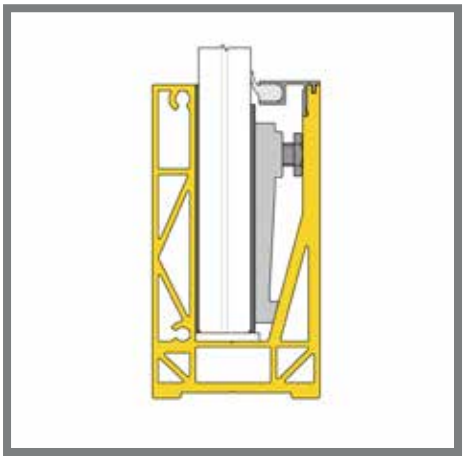



BASE PROFILE

		L
2089015	SB-O 0.5S Brute	4000 mm
2089017	SB-O 0.5S Stainless look	4000 mm

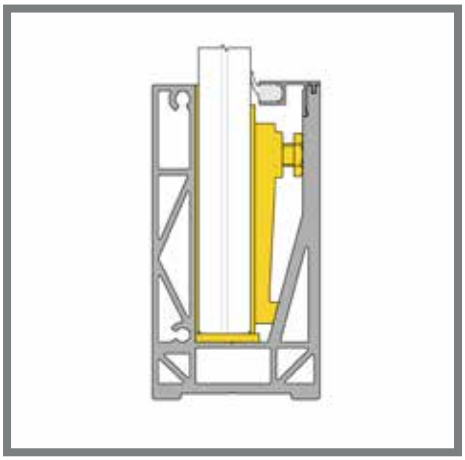



GLASS MOUNTING SET (GMS)

		L
2020151	GMS-L1- 8/8/pvb	4000 mm
2028329	GMS-XL1 - 6/6/pvb	4000 mm

Content:
Clamping strip + glass blocks + required packing

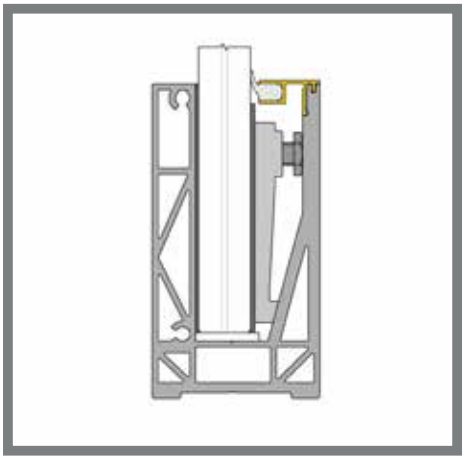



REAR COVER

		B	L
2089104	CR-L1 - 8/8/pvb - Brute	21	4000 mm
2089358	CR-L1 - 8/8/pvb - Stainless look	21	4000 mm
2089106	CR-XL1 - 6/6/pvb - Brute	25	4000 mm
2089359	CR-XL1 - 6/6/pvb - Stainless look	25	4000 mm

OPTIONAL FOR REAR COVER

		L
1012309	Rubber for the cover rear	1000 mm


end cover left



END COVERS

2033417 SB-O 0.5S end cover left, Brute
2033419 SB-O 0.5S end cover left, Stainless look
2033418 SB-O 0.5S end cover right, Brute
2033420 SB-O 0.5S end cover right, Stainless look

Small color differences between end caps and profiles are possible.





CORNER PIECES

2090581 SB-O 0.5S Outside corner Brute
2090498 SB-O 0.5S Outside corner Stainless look

2090577 SB-O 0.5S Inside corner Brute
2090499 SB-O 0.5S Inside corner Stainless look

fischer
innovative solutions

ANCHOR SB-O 0.5S

2089145 FISCHER FBS II 10x120/35 US Concrete screw indoor
2089143 FISCHER FBS II 10x120/35 US Concrete screw A4 outdoor



Mounting tools on page 70

Check the instruction video

UNIQ SB-O 0.5S | INFO

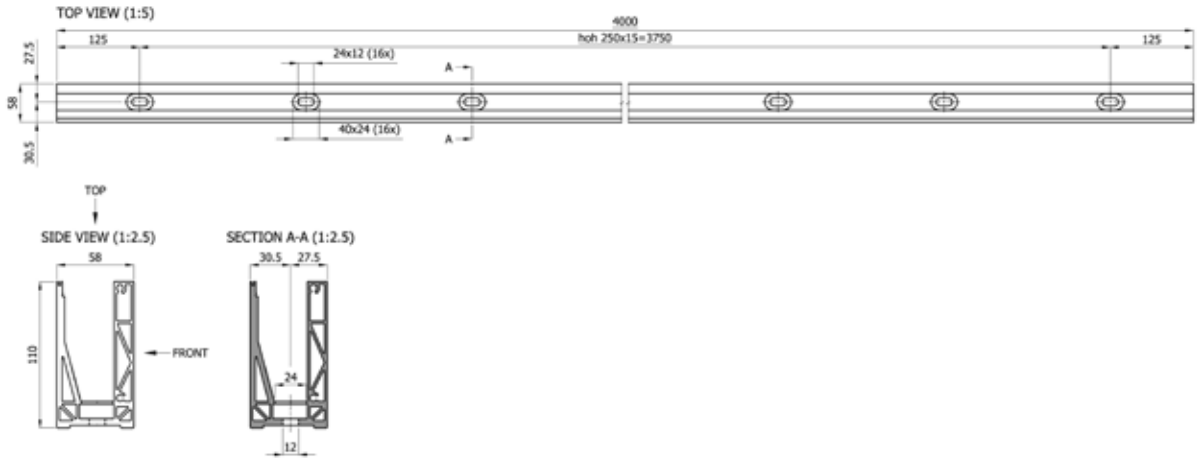

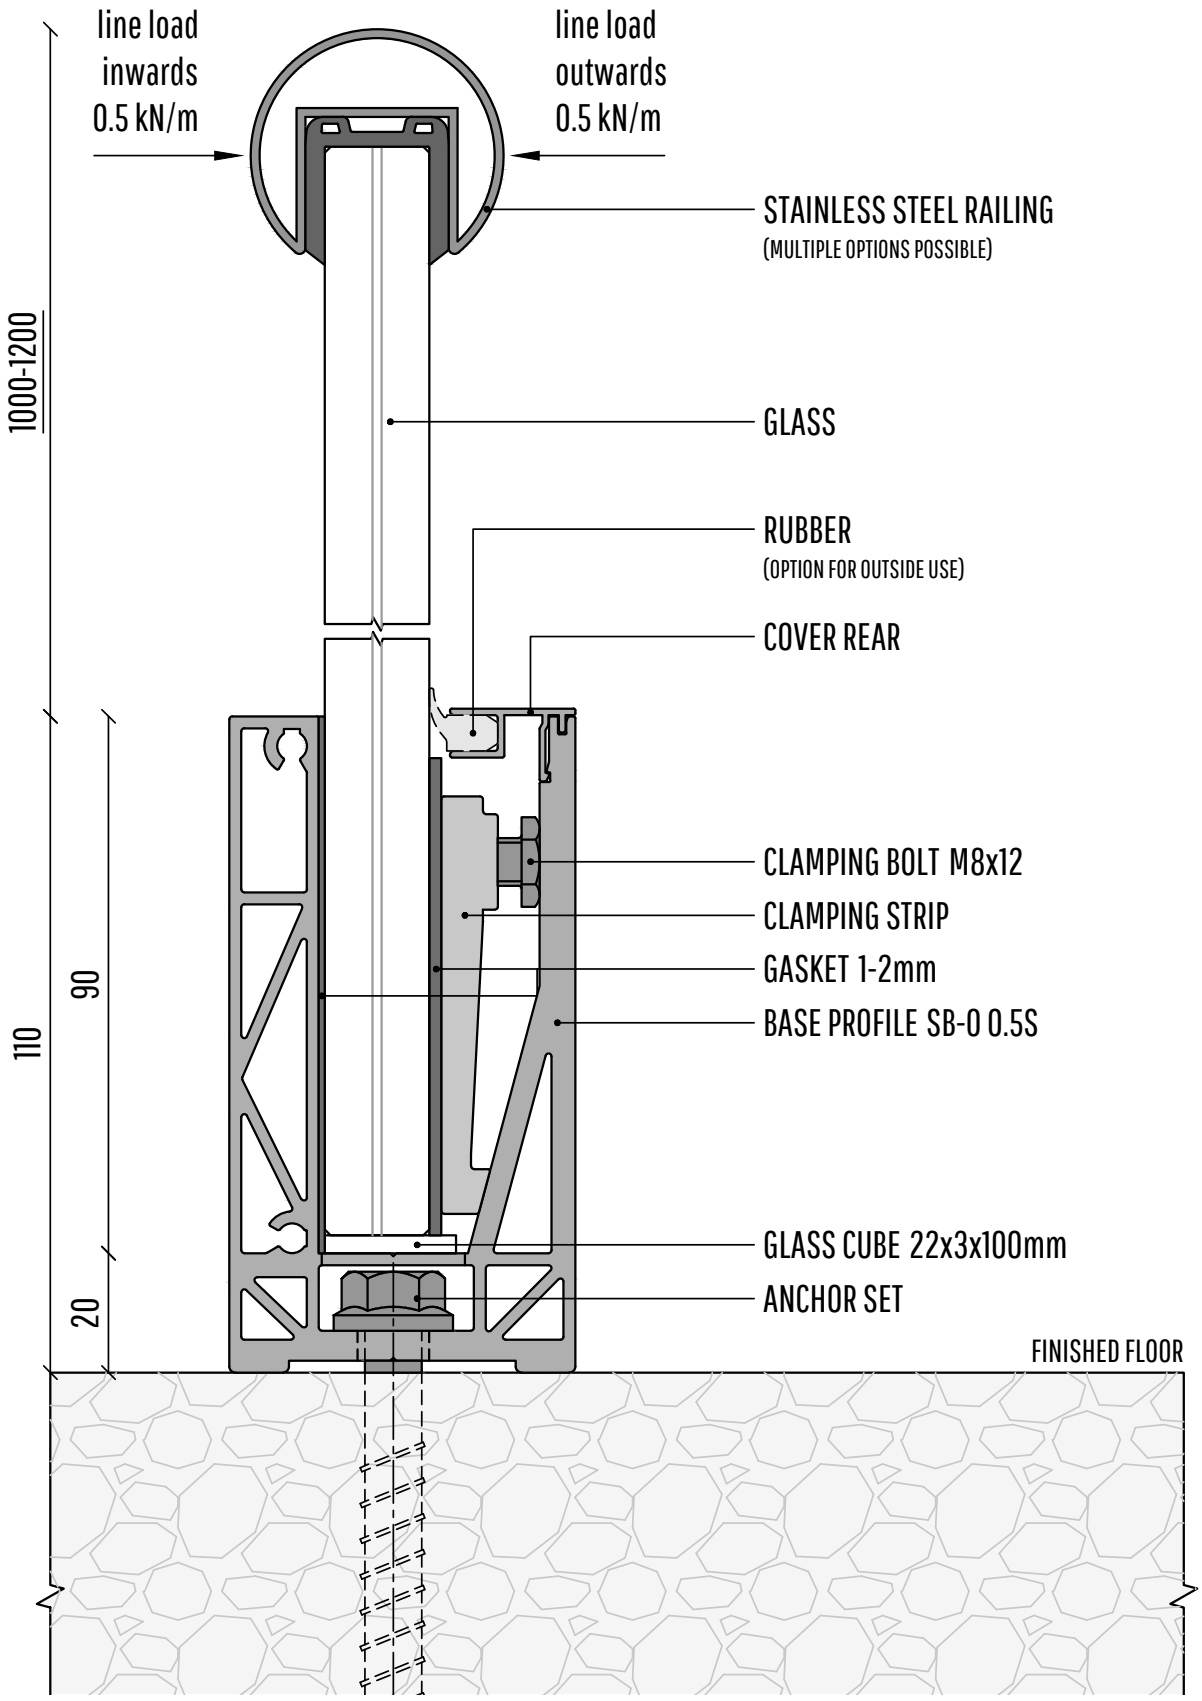
line load
inwards
0.5 kN/m
line load
outwards
0.5 kN/m
STAINLESS STEEL RAILING
(MULTIPLE OPTIONS POSSIBLE)
1000-1200
GLASS
RUBBER
(OPTION FOR OUTSIDE USE)
COVER REAR
CLAMPING BOLT M8x12
CLAMPING STRIP
GASKET 1-2mm
BASE PROFILE SB-0 0.5S
110
90
GLASS CUBE 22x3x100mm
ANCHOR SET
20
FINISHED FLOOR

UNIQ SB-01S | TOP MONTAGE
1 kN/m



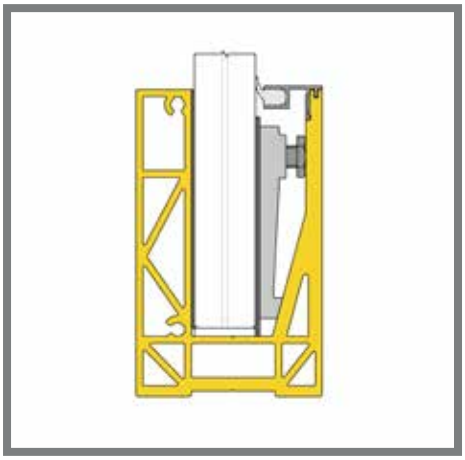





BASE PROFILE

		L
2089022	SB-O1S Brute	4000 mm
2089024	SB-O1S Stainless look	4000 mm
2089023	SB-O1S Satin black	4000 mm

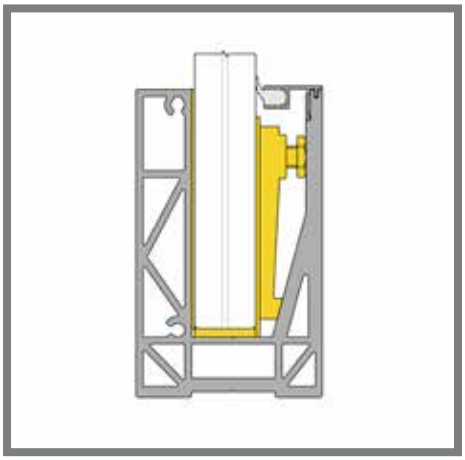



GLASS MOUNTING SET (GMS)

		L
2020151	GMS-L1- 10/10/pvb	4000 mm
2028329	GMS-XL1 - 8/8/pvb	4000 mm
2028334	GMS-XXL1 - 15	4000 mm

Content:
Clamping strip + glass blocks + required packing

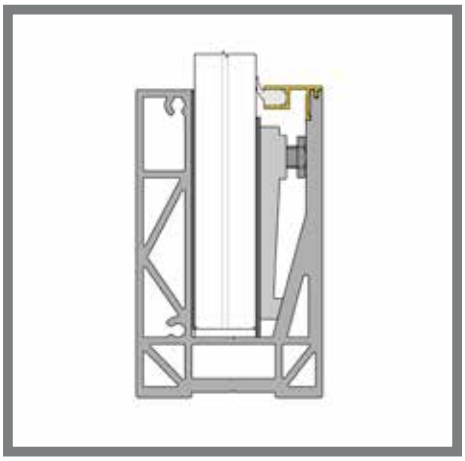





REAR COVER

		B	L
2089104	CR-L1 - 10/10/pvb - Brute	21	4000 mm
2089358	CR-L1 - 10/10/pvb - Stainless look	21	4000 mm
2089105	CR-L1 - 10/10/pvb - Satin black	21	4000 mm
2089106	CR-XL1 - 8/8/pvb - Brute	25	4000 mm
2089359	CR-XL1 - 8/8/pvb - Stainless look	25	4000 mm
2089107	CR-XL1 - 8/8/pvb - Satin black	25	4000 mm
2089108	CR-XXL1 - 15 - Brute	28	4000 mm
2089360	CR-XXL1 - 15 - Stainless look	28	4000 mm

OPTIONAL FOR REAR COVER

		L
1012309	Rubber for the cover rear	1000 mm


end cover left



END COVERS

2033421 SB-O1S end cover left, Brute
2033423 SB-O1S end cover left, Stainless look
2091395 SB-O1S end cover left, Satin black
2033422 SB-O1S end cover right, Brute
2033424 SB-O1S end cover right, Stainless look
2091396 SB-O1S end cover left, satijn zwart
Small color differences between end caps and profiles are possible.







CORNER PIECES

2090593 SB-O1S Outside corner Brute
2090501 SB-O1S Outside corner Stainless look
2091426 SB-O1S Outside corner Satin black

2090585 SB-O1S Inside corner Brute
2090502 SB-O1S Inside corner Stainless look
2091427 SB-O1S Inside corner Satin black

fischer
innovative solutions

ANCHOR SB-01S

2089146 FISCHER FBS II 12x130/30 US Concrete screw indoor
2090469 FISCHER FBS II 12x130/30 US Concrete screw A4 outdoor



Mounting tools on page 70

Check the instruction video

UNIQ SB-01S | INFO

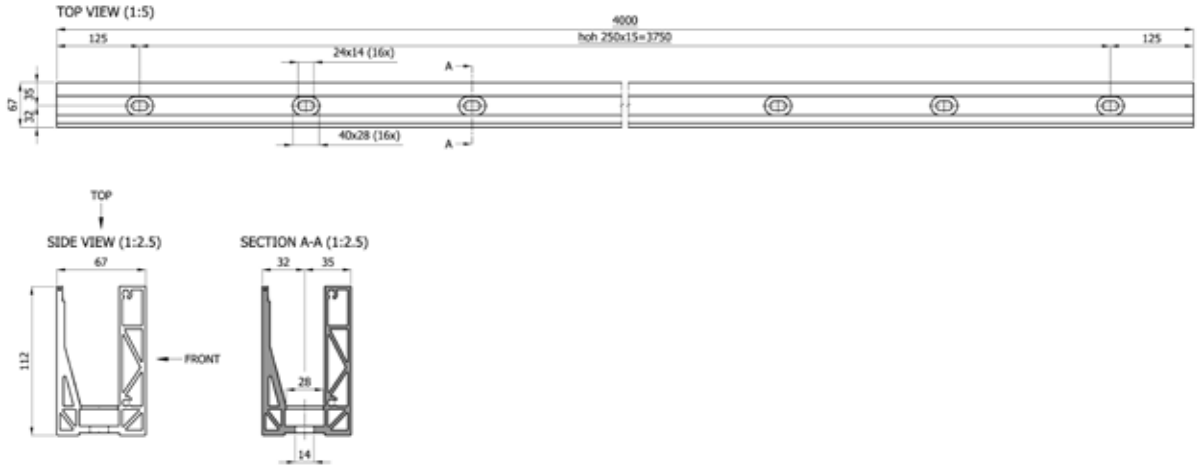

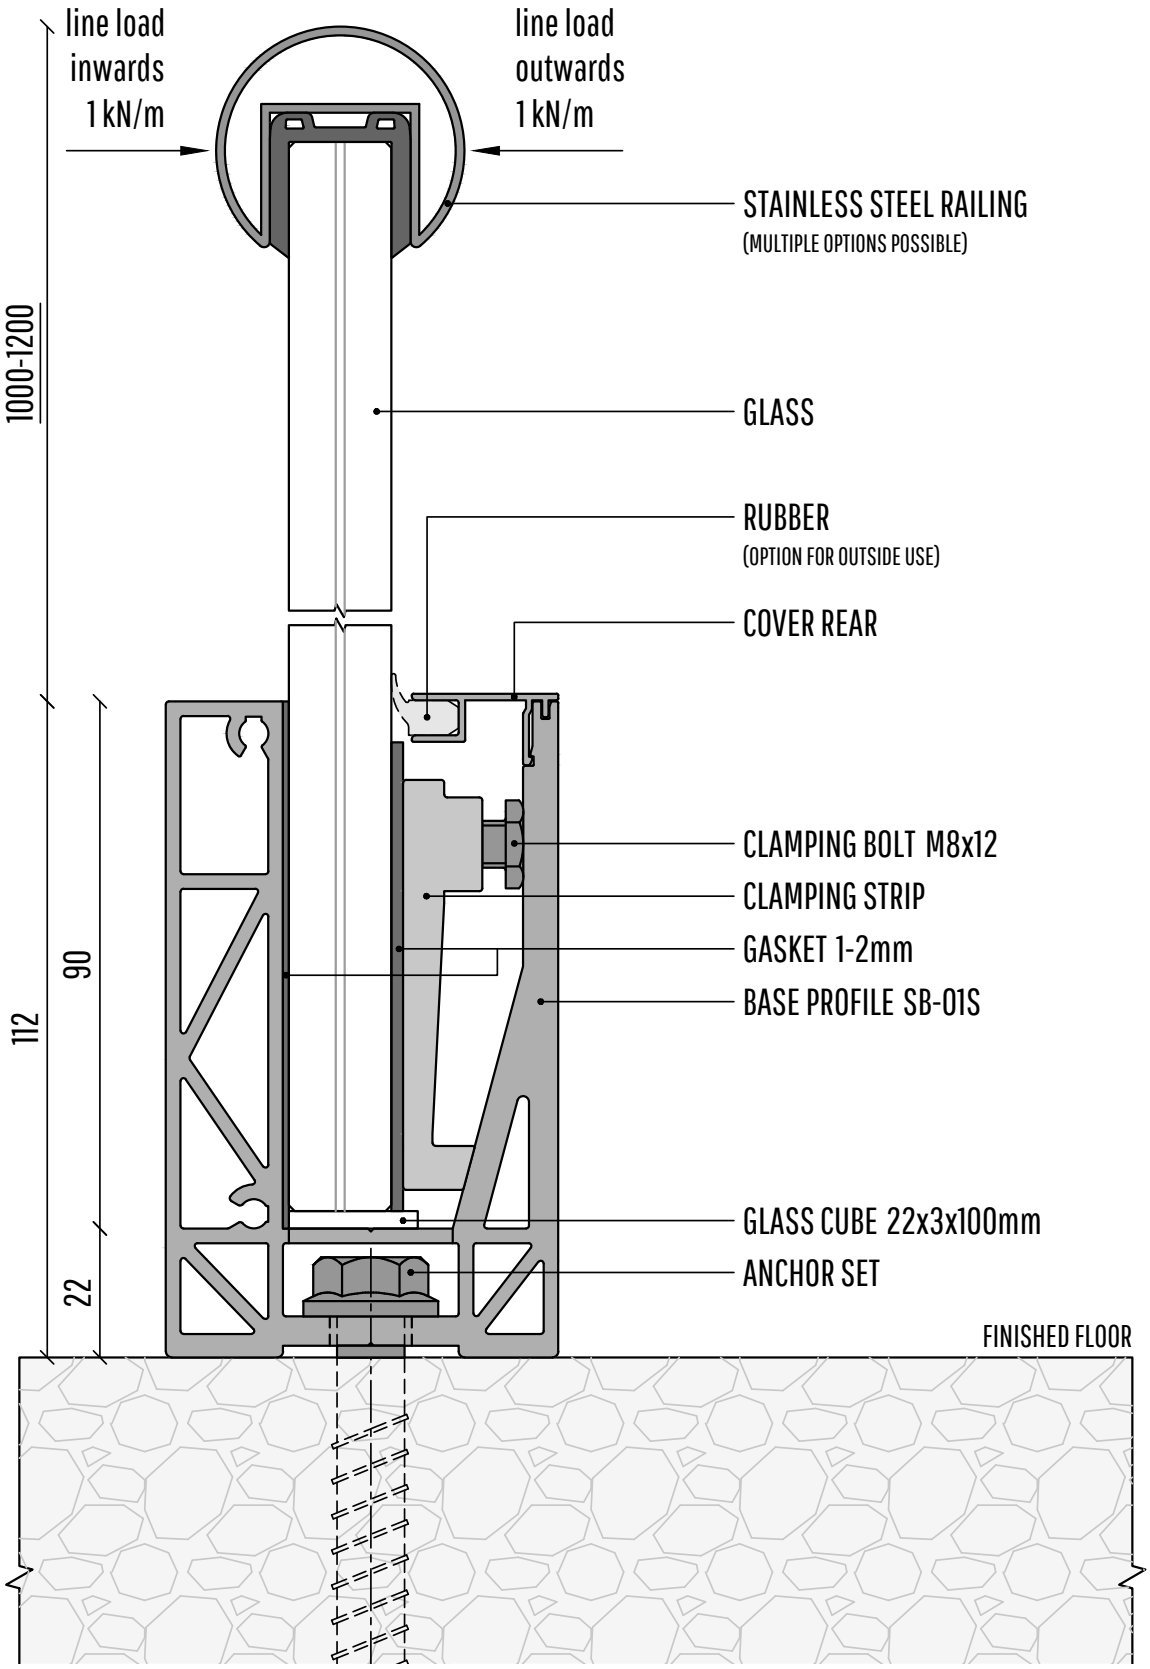
line load
inwards
1 kN/m
line load
outwards
1 kN/m
STAINLESS STEEL RAILING
(MULTIPLE OPTIONS POSSIBLE)
1000-1200
GLASS
RUBBER
(OPTION FOR OUTSIDE USE)
COVER REAR
CLAMPING BOLT M8x12
CLAMPING STRIP
GASKET 1-2mm
BASE PROFILE SB-01S
112
90
22
GLASS CUBE 22x3x100mm
ANCHOR SET
FINISHED FLOOR

UNIQ SB-O2S | TOP MONTAGE
2 kN/m



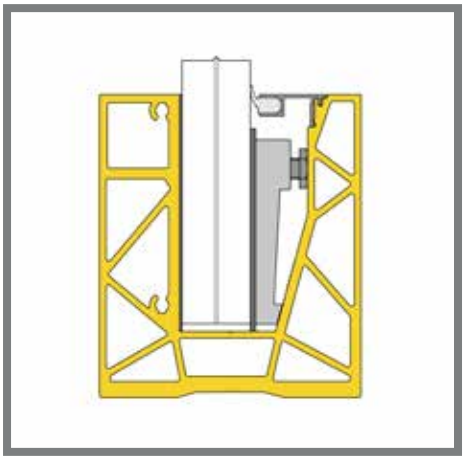





BASE PROFILE

		L
2090302	SB-O2S Brute	4000 mm
2090303	SB-O2S Stainless look	4000 mm

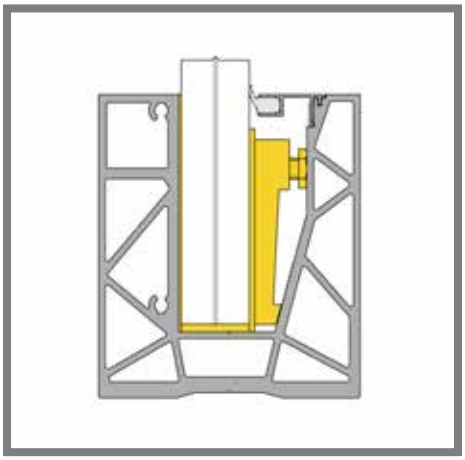



GLASS MOUNTING SET (GMS)

		L
2028356	GMS-L2 - 12/12/pvb	4000 mm
2028588	GMS-XXL3 - 10/10/pvb	4000 mm
2028588	GMS-XXL3 - 19	4000 mm

Content:
Clamping strip + glass blocks + required packing

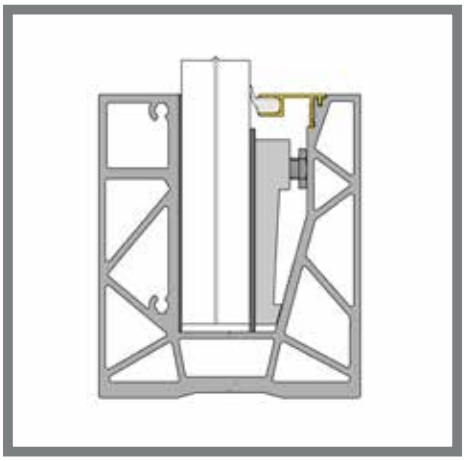





REAR COVER

		B	L
2089106	CR-XL1 - 12/12/pvb - Brute	25	4000 mm
2089359	CR-XL1 - 12/12/pvb - Stainless look	25	4000 mm
2089108	CR-XXL1 - 10/10/pvb - Brute	28	4000 mm
2089360	CR-XXL1 - 10/10/pvb - Stainless look	28	4000 mm
2089620	CR-XXL3 - 19 - Brute	31	4000 mm
2089622	CR-XXL3 - 19 - Stainless look	31	4000 mm

OPTIONAL FOR REAR COVER

		L
1012309	Rubber for the cover rear	1000 mm







CORNER PIECES

2090599 SB-O2S Outside corner Brute
2090503 SB-O2S Outside corner Stainless look

2090600 SB-O2S Inside corner Brute
2090504 SB-O2S Inside corner Stainless look





END COVERS

2090545 SB-O2S end cover left, Brute
2090410 SB-O2S end cover left, Stainless look
2090546 SB-O2S end cover right, Brute
2090411 SB-O2S end cover right, Stainless look

Small color differences between end caps and profiles are possible.

fischer
innovative solutions

ANCHOR SB-02S

2090470 FISCHER FBS II 12x110 50/35/10 US Concrete screw indoor
2090471 FISCHER FBS II 12x110 10/- US A4 Concrete screw A4 outdoor

Mounting tools on page 70

Check the instruction video

UNIQ SB-02S | INFO

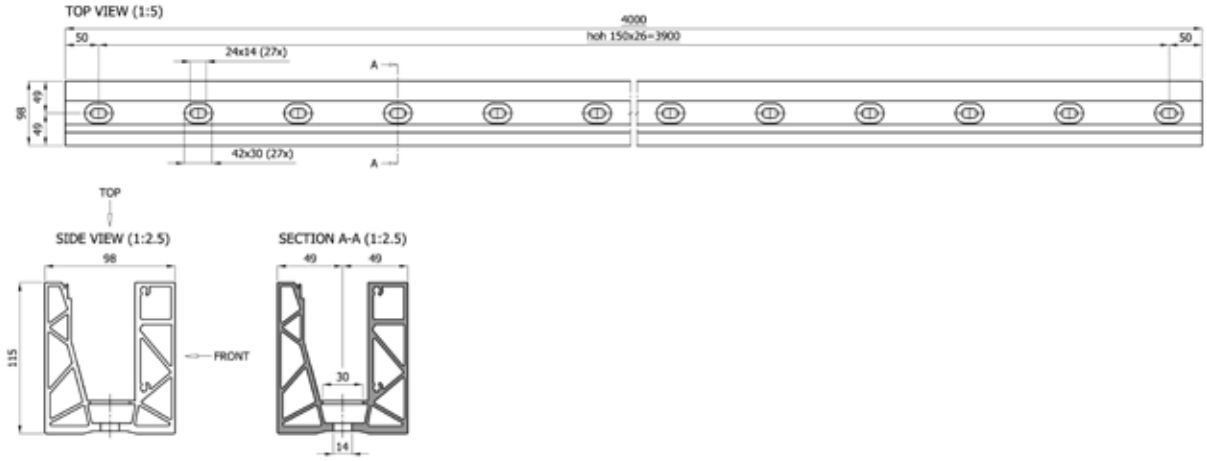

Compagnie Het Zoute, project La Rive - La Réserve II

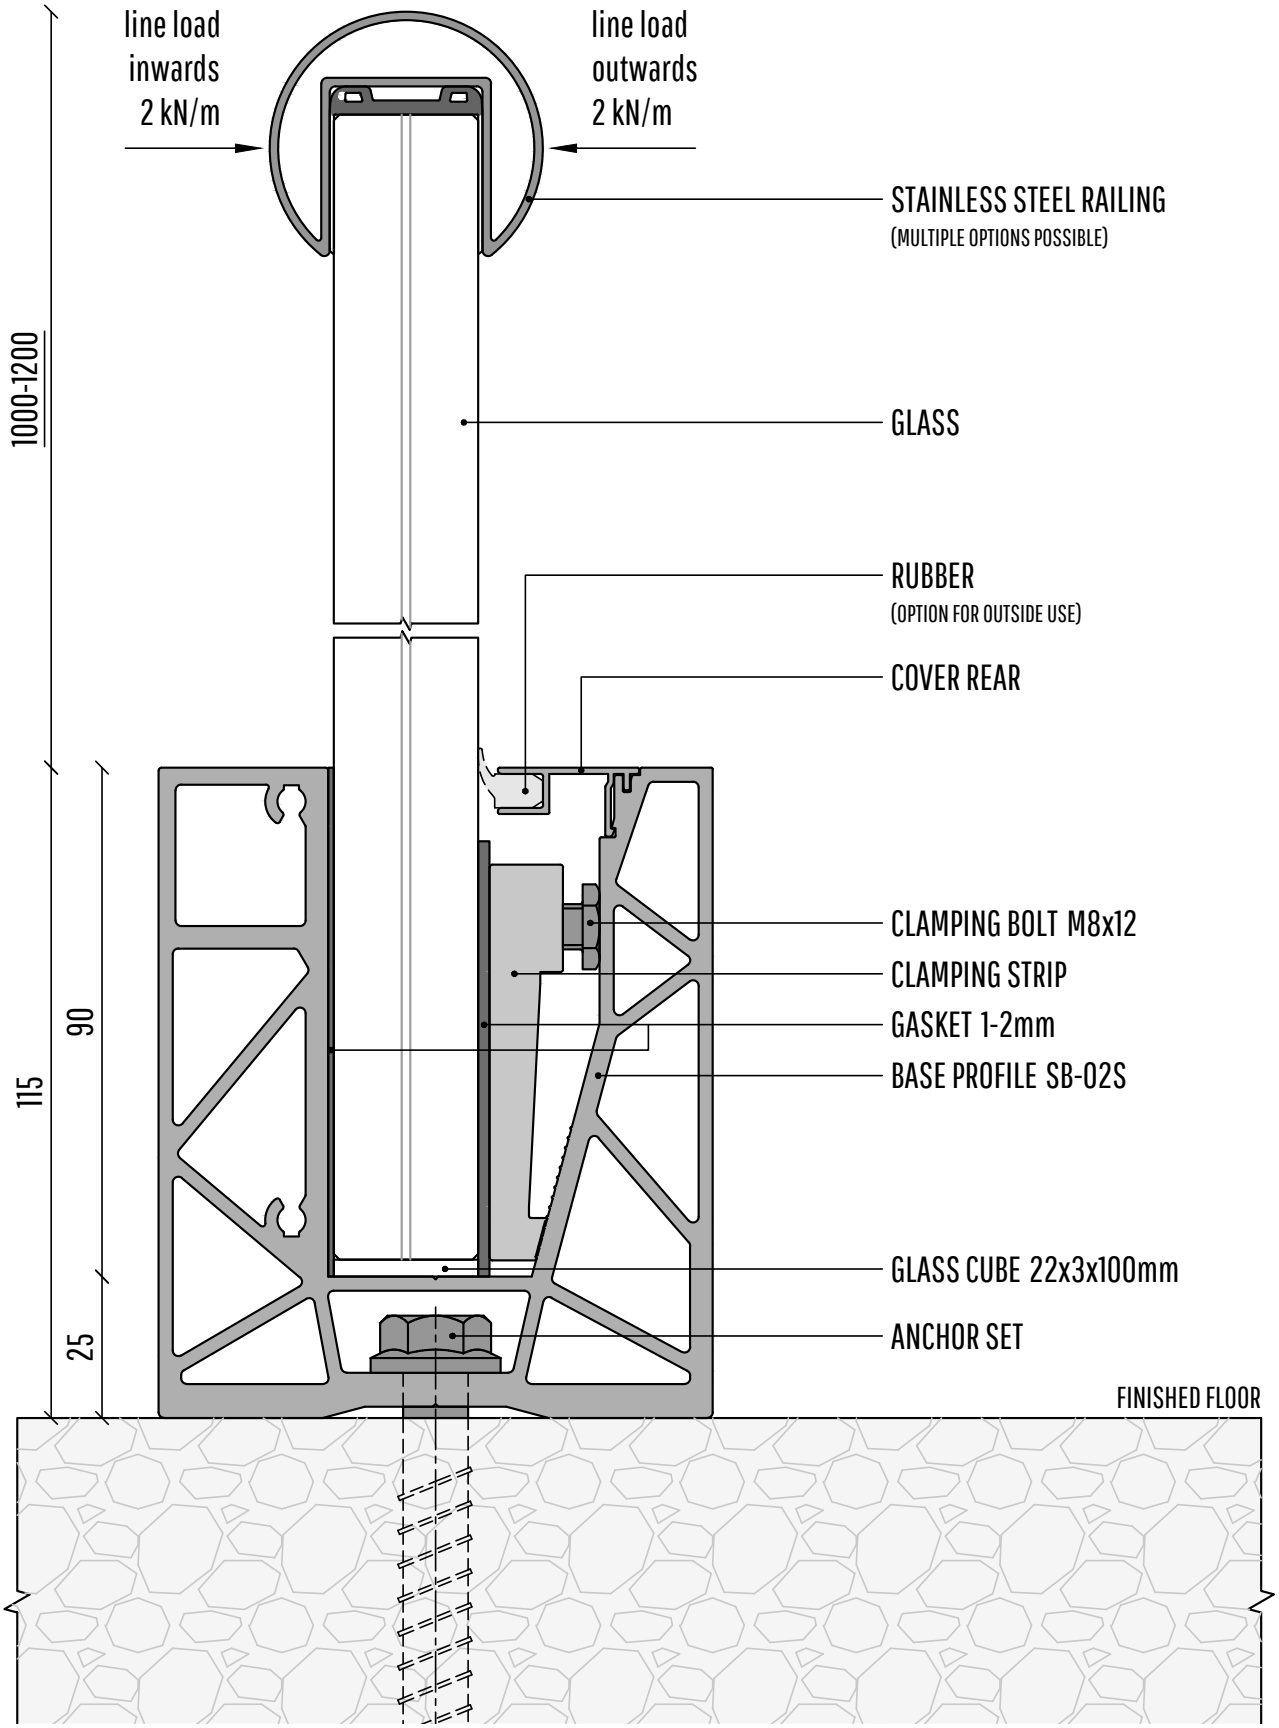
line load
inwards
2 kN/m
line load
outwards
2 kN/m
STAINLESS STEEL RAILING
(MULTIPLE OPTIONS POSSIBLE)
1000-1200
GLASS
RUBBER
(OPTION FOR OUTSIDE USE)
COVER REAR
CLAMPING BOLT M8x12
CLAMPING STRIP
GASKET 1-2mm
BASE PROFILE SB-02S
115
90
25
GLASS CUBE 22x3x100mm
ANCHOR SET
FINISHED FLOOR

UNIQ SB-A 0.5SI | SIDE MOUNTED 0.6 kN/m



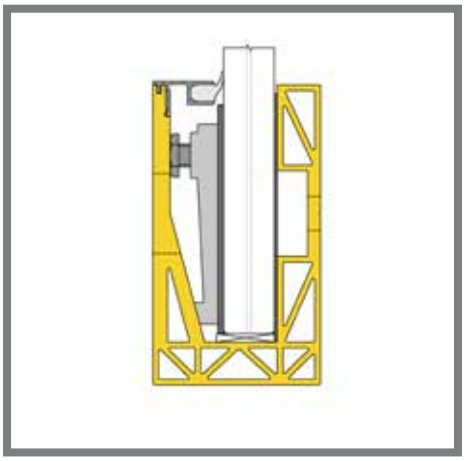





BASE PROFILE

		L
2089050	SB-A 0.5SI Brute	4000 mm
2091500	SB-A 0.5SI Stainless look	4000 mm

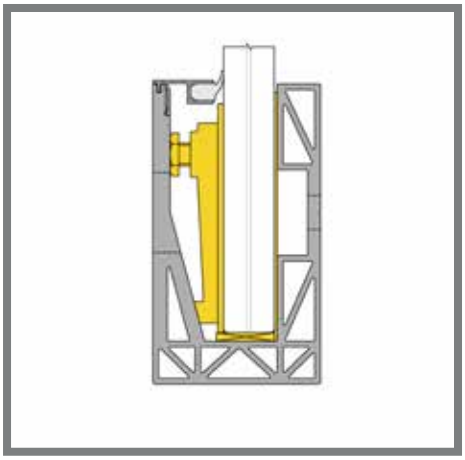



GLASS MOUNTING SET (GMS)

		L
2020151	GMS-L1- 8/8/pvb	4000 mm

Content:
Clamping strip + glass blocks + required packing

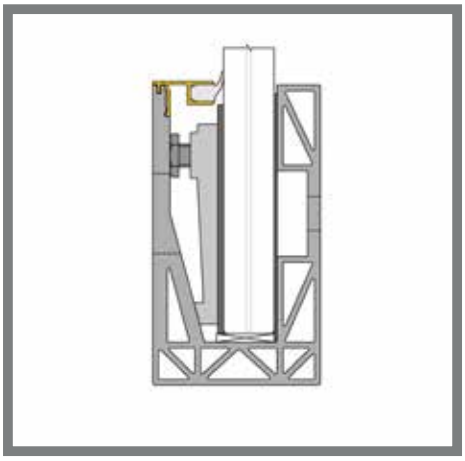





REAR COVER

		B	L
2089104	CR-L1 - 8/8/pvb - Brute	21	4000 mm
2089358	CR-L1 - 8/8/pvb - Stainless look	21	4000 mm

OPTIONAL FOR REAR COVER

		L
1012309	Rubber for the cover rear	1000 mm


end cover left

END COVERS

2091661	SB-A 0.5SI end cover left, Brute
2091663	SB-A 0.5SI end cover left, Stainless look
2091662	SB-A 0.5SI end cover right, Brute
2091665	SB-A 0.5SI end cover right, Stainless look

Small color differences between end caps and profiles are possible.

COVER CAP MOUNTING HOLE

201271	Cover cap mounting hole	28 mm







CORNER PIECES

2091666	SB-A 0.5SI Outside corner Brute
2091667	SB-A 0.5SI Outside corner Stainless look
2091668	SB-A 0.5SI Inside corner Brute
2091669	SB-A 0.5SI Inside corner Stainless look

fischer
innovative solutions

ANCHOR SB-A 0.5SI

2089145	FISCHER FBS II 10 x 120/35 US Concrete screw indoor
2089143	FISCHER FBS II 10 x 120/35 US Concrete screw A4 outdoor

Mounting tools on page 70

Check the instruction video

UNIQ SB-A 0.5SI | INFO

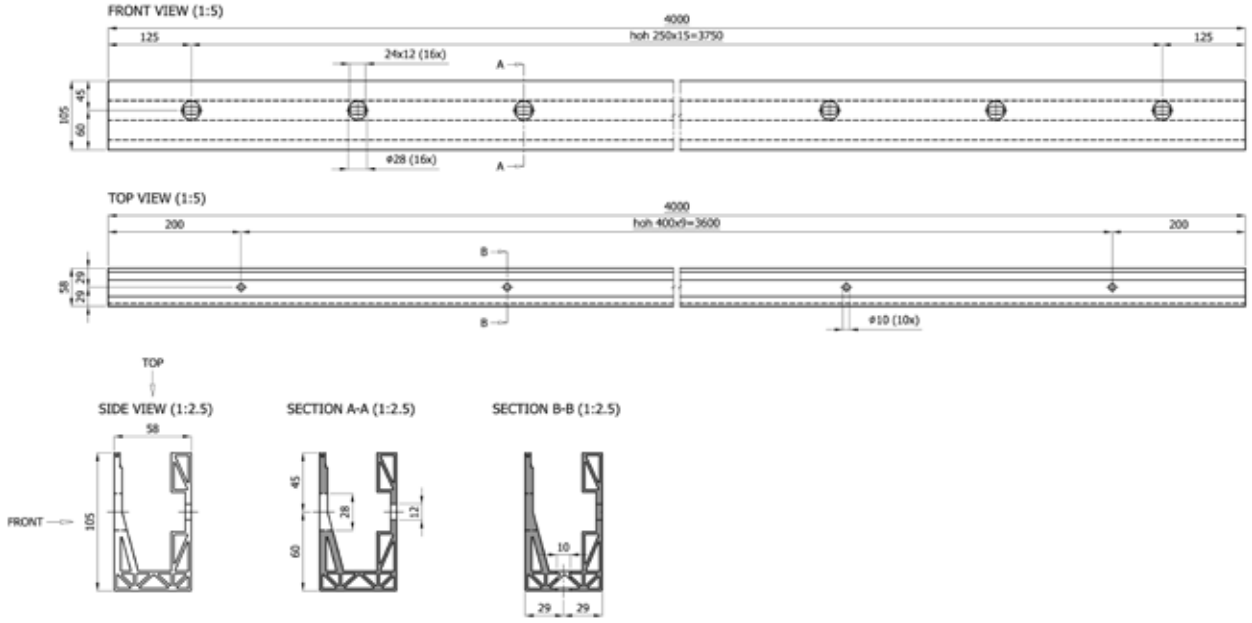

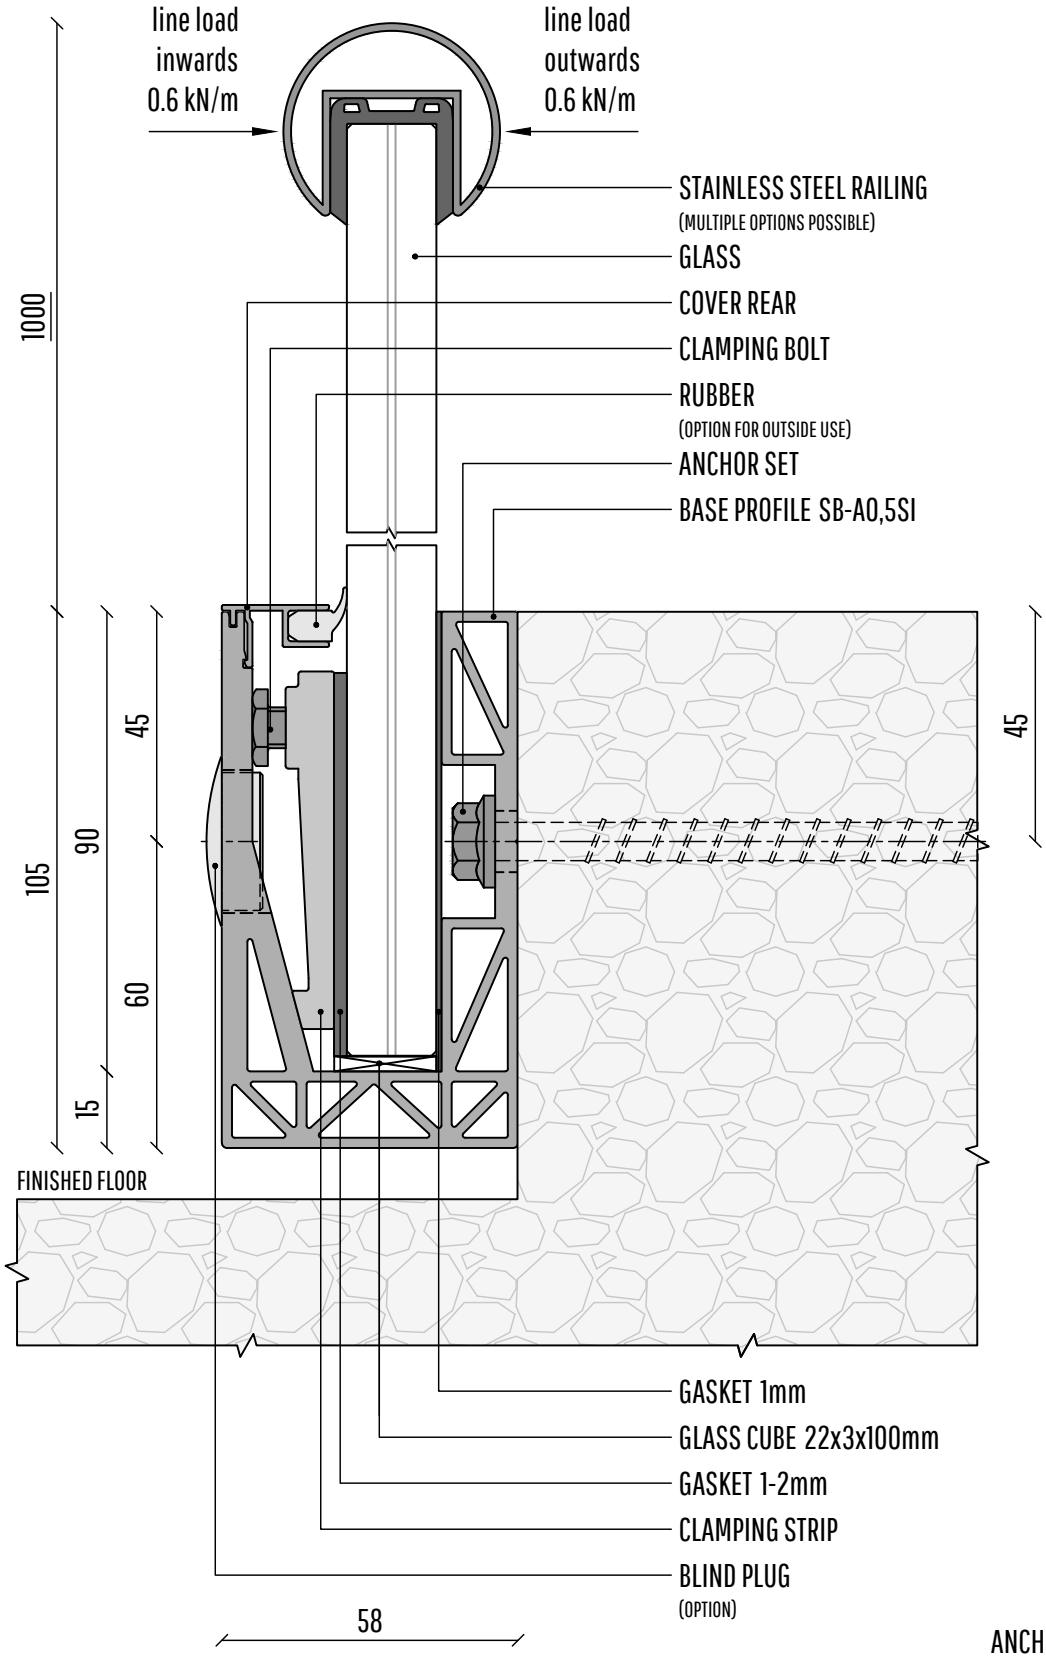

ANCHOR SET STANDARD

INDOOR: FBS II 10X120 65/55/35 US
OUTDOOR: FBS II 10X120 65/55/35 US R
ALTERNATIVE: M10 BOLT AT A STEELCONTRUCTION

UNIQ SB-A1S | SIDE MOUNTED
1 kN/m



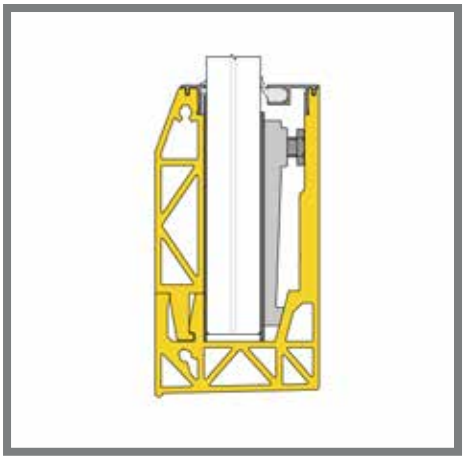





BASE PROFILE

		L
2089057	SB-A1S Brute	4000 mm
2089059	SB-A1S Stainless look	4000 mm
2091181	SB-A1S(C) Stainless look	4000 mm
2089058	SB-A1S(C) Satin black	4000 mm

Easy mounting because of the separate leg on the outside of the profile

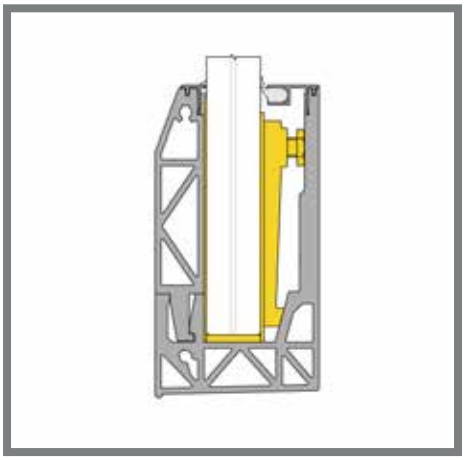



GLASS MOUNTING SET (GMS)

		L
2028606	GMS-L4 - 10/10/pvb	4000 mm
2028850	GMS-XL4 - 8/8/pvb	4000 mm
2029977	GMS-XXL4 - 15	4000 mm

Content:
Clamping strip + glass blocks + required packing

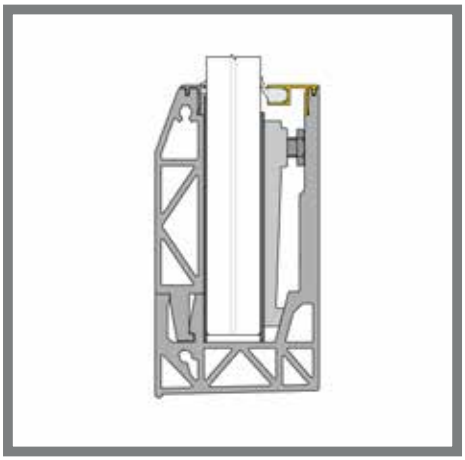





REAR COVER

		B	L
2089104	CR-L1 - 10/10/pvb - Brute	21	4000 mm
2089358	CR-L1 - 10/10/pvb - Stainless look	21	4000 mm
2089105	CR-L1 - 10/10/pvb - Satin black	21	4000 mm
2089106	CR-XL1 - 8/8/pvb - Brute	25	4000 mm
2089359	CR-XL1 - 8/8/pvb - Stainless look	25	4000 mm
2089107	CR-XL1 - 8/8/pvb - Satin black	25	4000 mm
2089108	CR-XXL1 - 15 - Brute	28	4000 mm
2089360	CR-XXL1 - 15 - Stainless look	28	4000 mm

OPTIONAL FOR REAR COVER

		L
1012309	Rubber for the cover rear	1000 mm



FRONT COVER

		L
2089088	CF-100 Brute	4000 mm
2089350	CF-100 Stainless look	4000 mm

OPTIONAL FOR FRONT COVER

		L
1012311	Rubber for the cover front	1000 mm





PLATING COVERS

		D	B	L
2089090	CF-103 Brute	3	25	4000 mm
2089351	CF-103 Stainless look	3	25	4000 mm
2089092	CF-112 Brute	12	34	4000 mm
2089352	CF-112 Stainless look	12	34	4000 mm
2089094	CF-120 Brute	20	42	4000 mm
2089353	CF-120 Stainless look	20	42	4000 mm





END COVERS

2033425	SB-A1S end cover left, Brute
2033427	SB-A1S end cover left, Stainless look
2091397	SB-A1S(C) eindkap links, Satin black
2033426	SB-A1S end cover right, Brute
2033428	SB-A1S end cover right, Stainless look
2091398	SB-A1S(C) eindkap rechts, Satin black

Small color differences between end caps and profiles are possible.







CORNER PIECES

2090617	SB-A1S Outside corner Brute
2090496	SB-A1S Outside corner Stainless look
2091343	SB-A1S(C) Outside corner Stainless look
2091445	SB-A1S(C) Outside corner Satin black
2090618	SB-A1S Inside corner Brute
2090497	SB-A1S Inside corner Stainless look
2091341	SB-A1S(C) Inside corner Stainless look
2091444	SB-A1S(C) Inside corner Satin black

fischer
innovative solutions

ANCHOR SB-A1S

2089821	FISCHER FBS II 10x120/35 SK Concrete screw indoor
2074809	FISCHER FBS II 10x120/35 SK Concrete screw A4 outdoor

Mounting tools on page 70

Check the instruction video

UNIQ SB-A1S | INFO

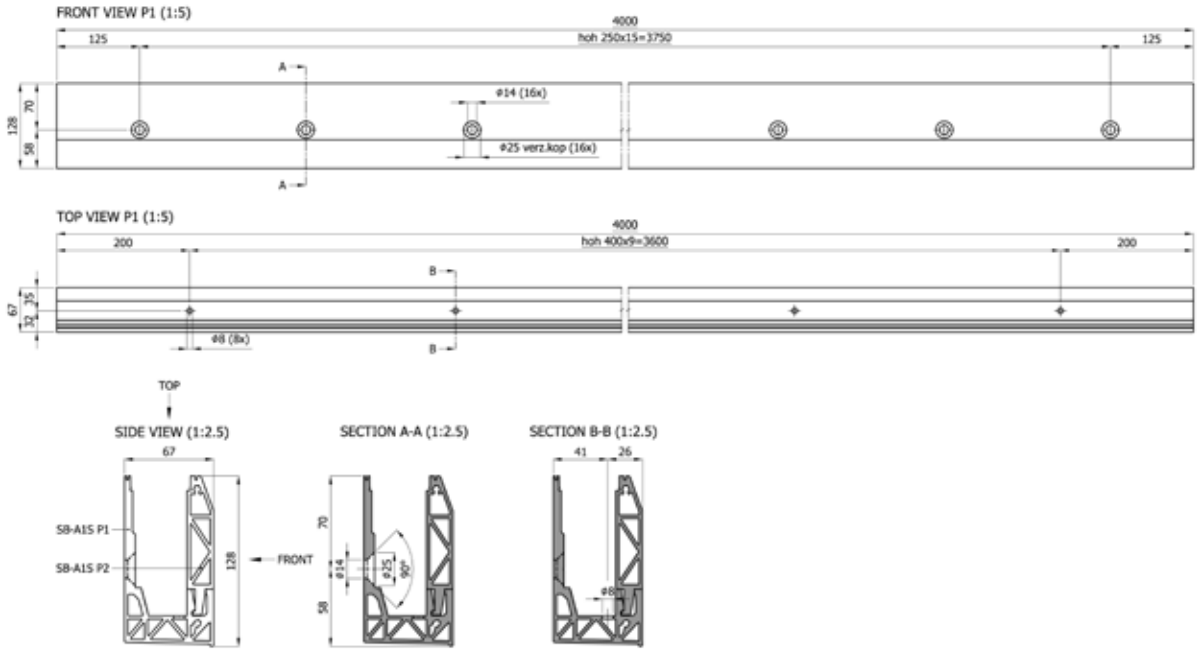

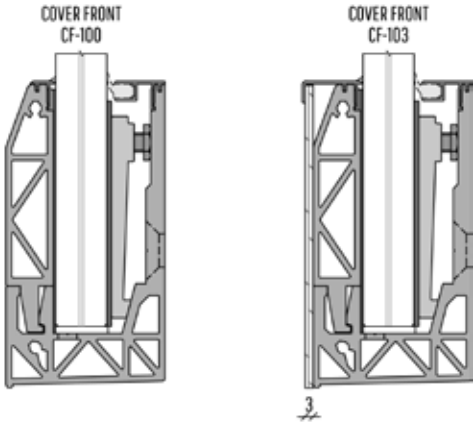

SB-A1S leg

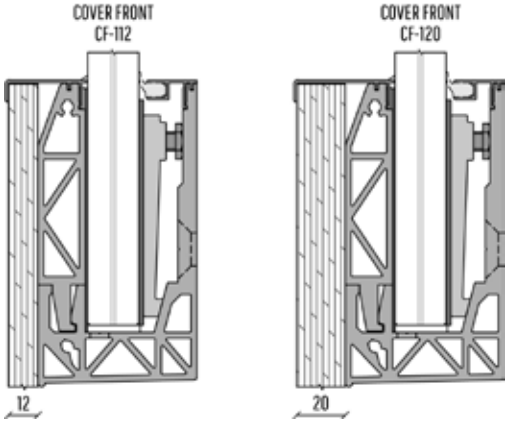

SB-A1S (C) leg

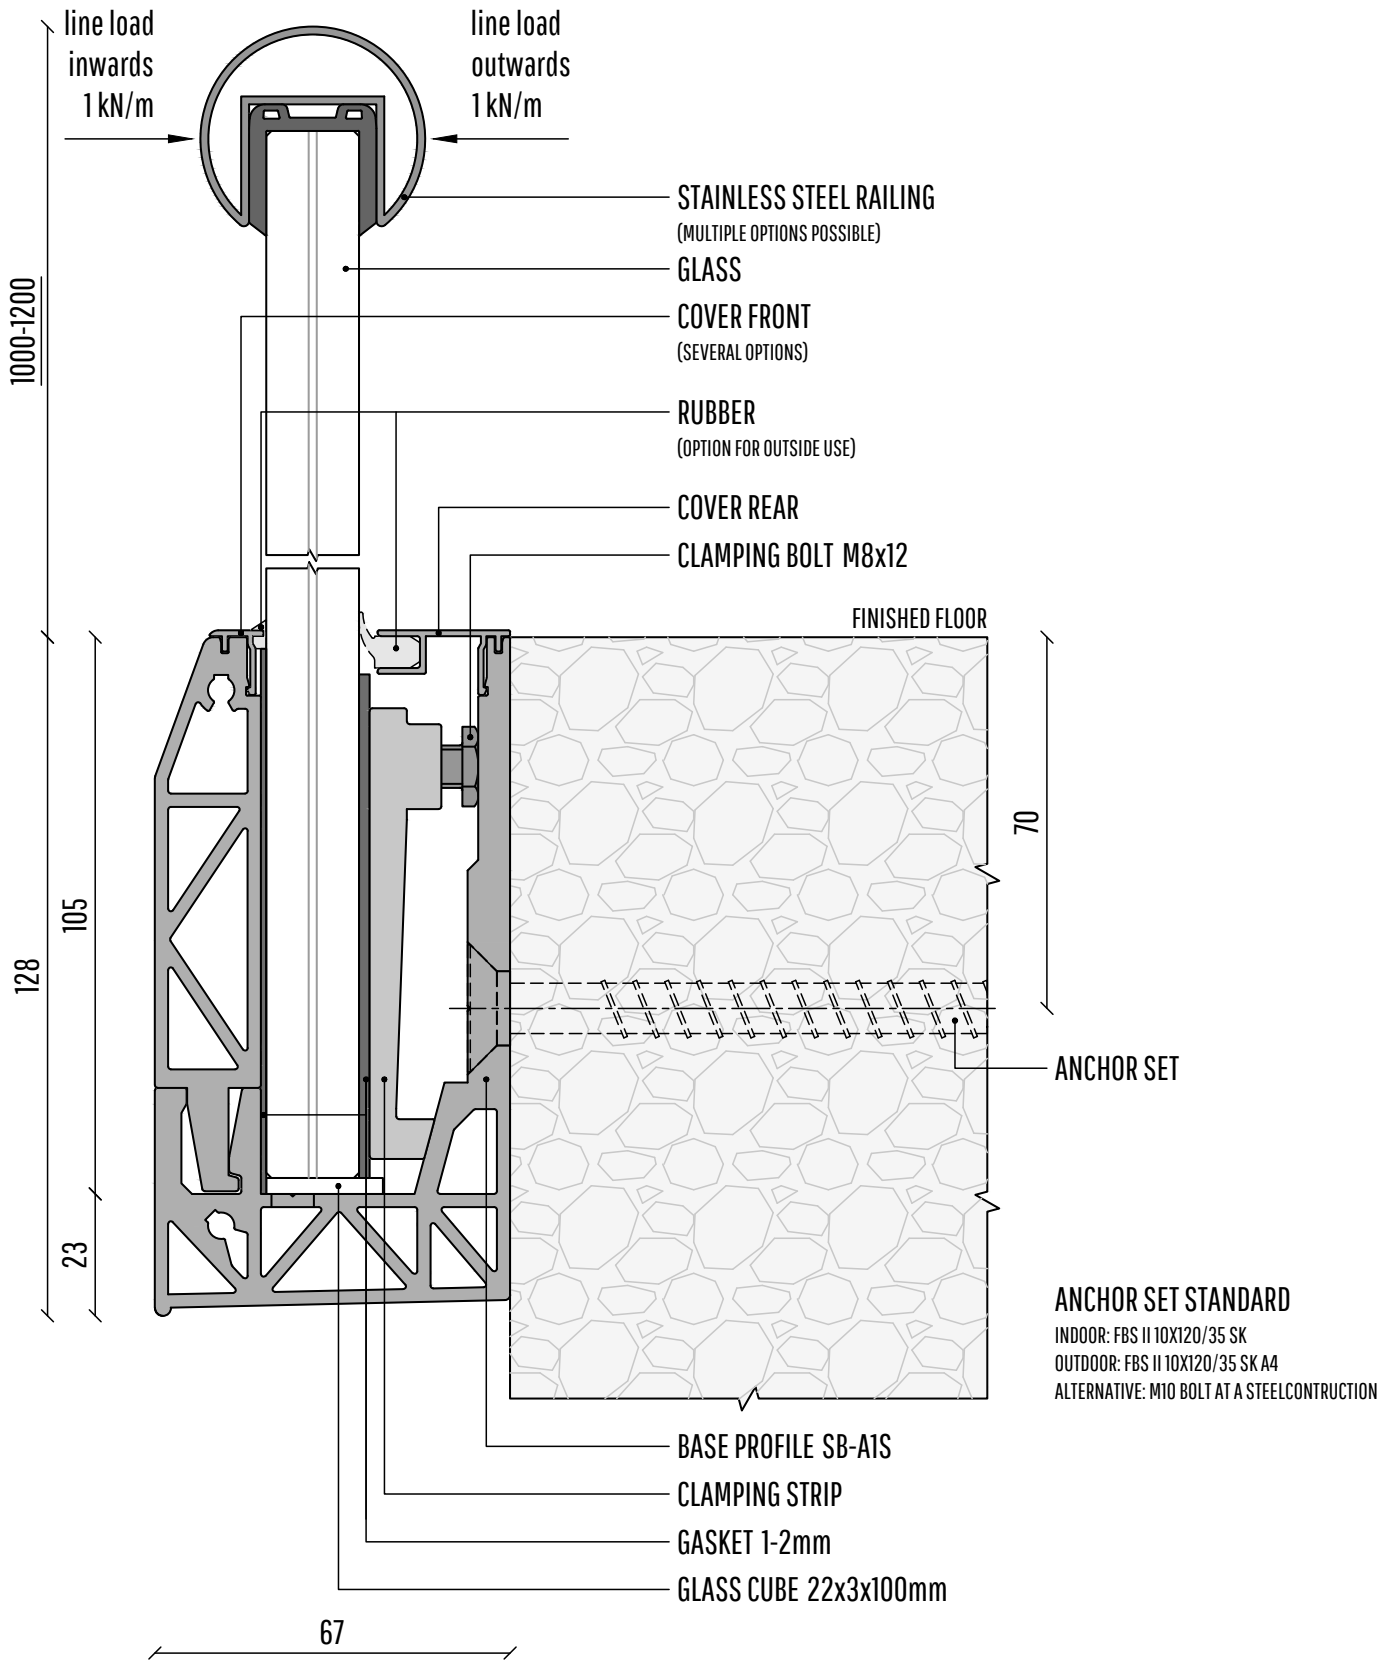

ANCHOR SET STANDARD

INDOOR: FBS II 10X120/35 SK

OUTDOOR: FBS II 10X120/35 SK A4

ALTERNATIVE: M10 BOLT AT A STEELCONTRUCTION

UNIQ SB-A2S | SIDE MOUNTED
2 kN/m



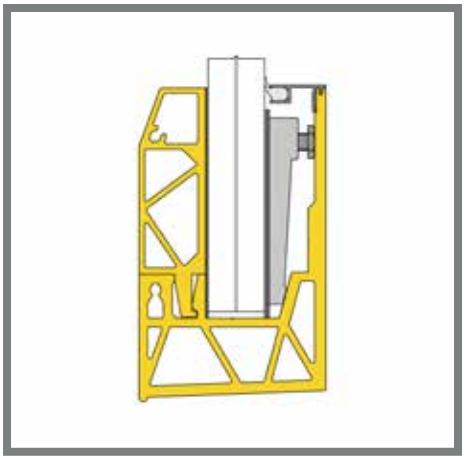





BASE PROFILE

		L
2090414	SB-A2S Brute	4000 mm
2090415	SB-A2S Stainless look	4000 mm

Easy mounting because of the separate leg on the outside of the profile

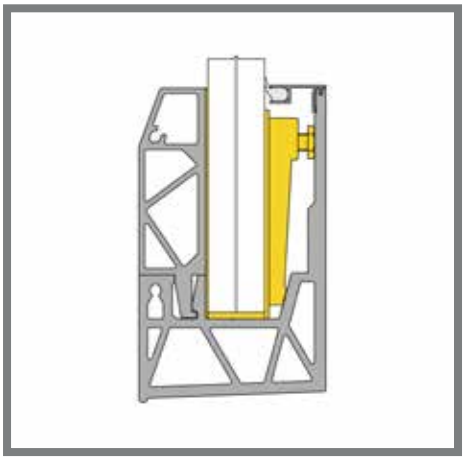



GLASS MOUNTING SET (GMS)

		L
2090377	GMS-L5 - 12/12/pvb	4000 mm
2090378	GMS-XL5- 10/10/pvb	4000 mm
2090378	GMS-XL5 - 19	4000 mm

Content:
Clamping strip + glass blocks + required packing

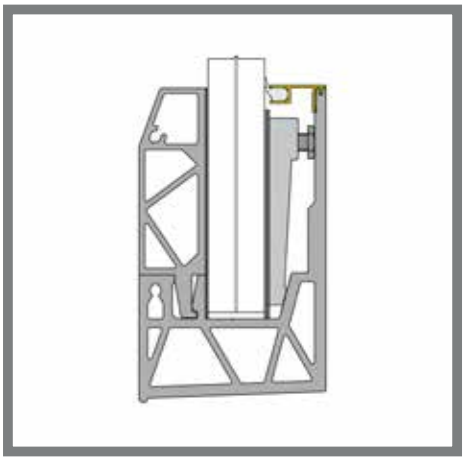





REAR COVER

		B	L
2089106	CR-XL1 - 12/12/pvb - Brute	25	4000 mm
2089359	CR-XL1 - 12/12/pvb - Stainless look	25	4000 mm
2089108	CR-XXL1 - 10/10/pvb - Brute	28	4000 mm
2089360	CR-XXL1 - 10/10/pvb - Stainless look	28	4000 mm
2089620	CR-XXL3 - 19 - Brute	31	4000 mm
2089622	CR-XXL3 - 19 - Stainless look	31	4000 mm

OPTIONAL FOR REAR COVER

		L
1012309	Rubber for the cover rear	1000 mm

end cover left

END COVERS

2090547 SB-A2S end cover left, Brute
2090412 SB-A2S end cover left, Stainless look
2090548 SB-A2S end cover right, Brute
2090413 SB-A2S end cover right, Stainless look

Small color differences between end caps and profiles are possible.







CORNER PIECES

2090620 SB-A2S Outside corner Brute
2090619 SB-A2S Outside corner Stainless look

2090597 SB-A2S Inside corner Brute
2090598 SB-A2S Inside corner Stainless look

fischer
innovative solutions

ANCHOR SB-A2S

2089821 FISCHER FBS II 10x120/35 SK Concrete screw indoor
2074809 FISCHER FBS II 10x120/35 SK Concrete screw A4 outdoor

Mounting tools on page 70

Check the instruction video

UNIQ SB-A2S | INFO

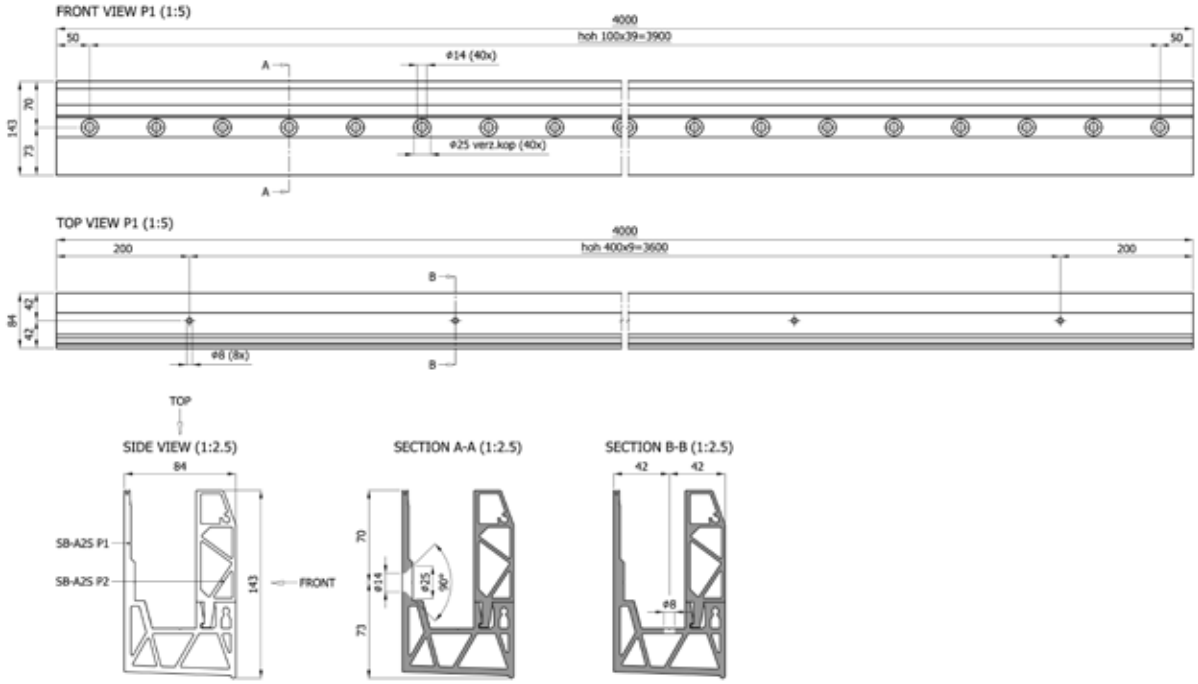

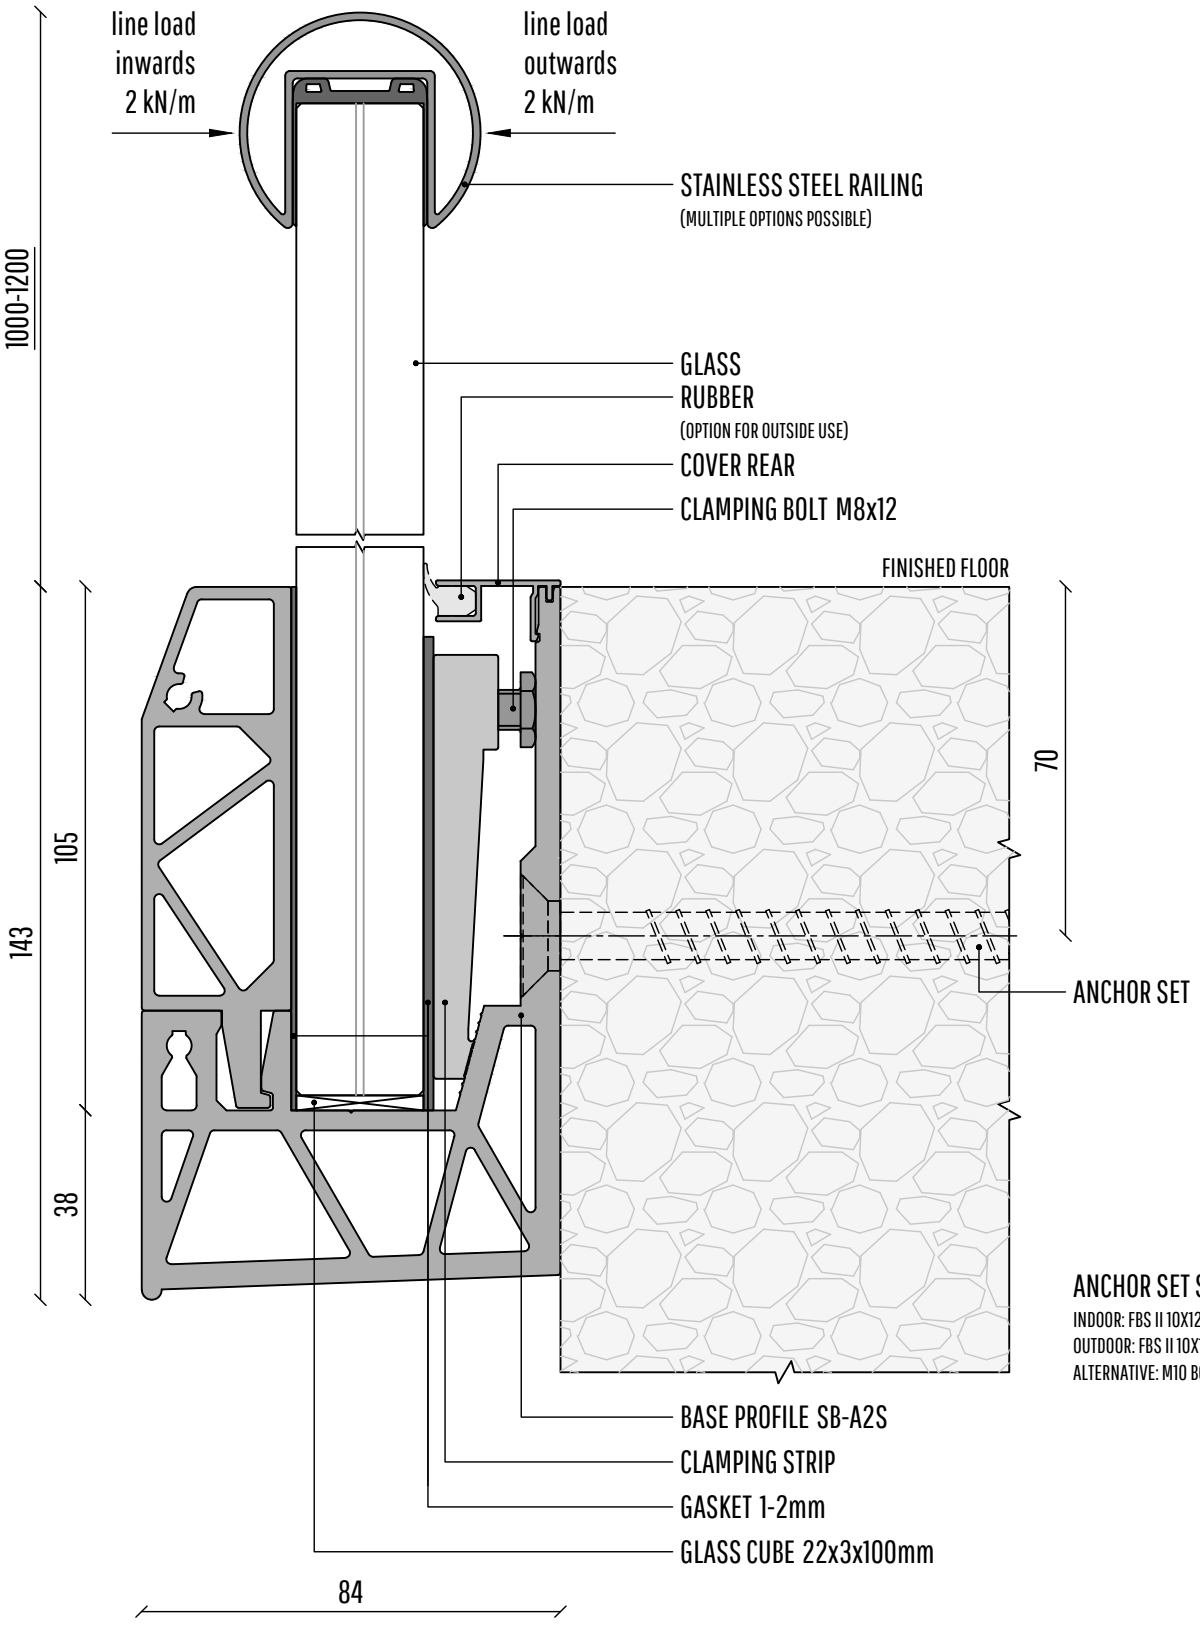

ANCHOR SET STANDARD

INDOOR: FBS II 10X120/35 SK

OUTDOOR: FBS II 10X120/35 SK A4

ALTERNATIVE: M10 BOLT AT A STEELCONTRUCTION

UNIQ SB-OXS | TOP MONTAGE

SB-OXS is not suitable for structural or safety purposes.



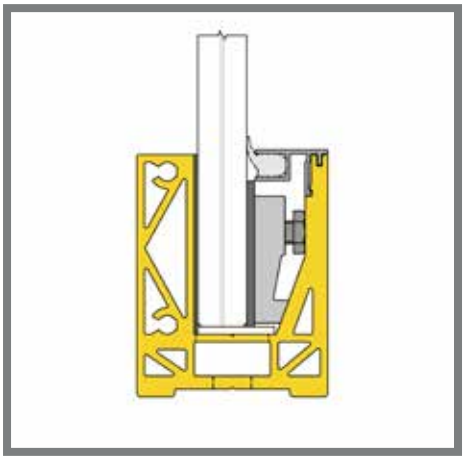





BASE PROFILE

		L
2090574	SB-OXS Brute	4000 mm
2089695	SB-OXS Stainless look	4000 mm

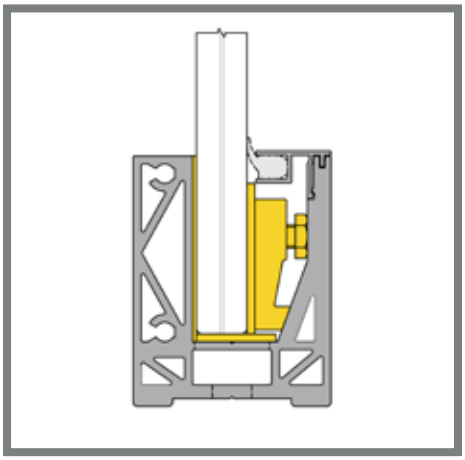





GLASS MOUNTING SET (GMS)

		L
2090155	GMS-S1- 4/4/pvb	4000 mm
2090156	GMS-XS1- 6/6/pvb	4000 mm
2090155	GMS-S1 - 8	4000 mm
2090156	GMS-XS1 - 12	4000 mm

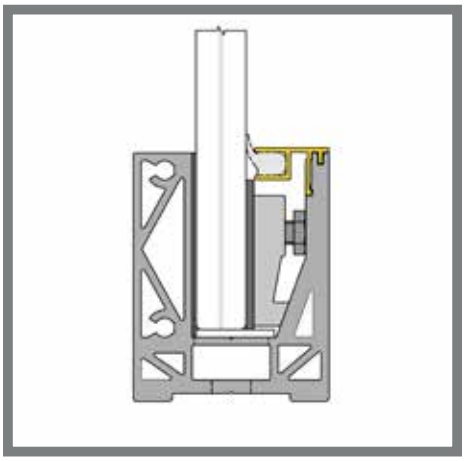





REAR COVER

		B	L
2089104	CR-L1 - 4/4/pvb - Brute	21	4000 mm
2089358	CR-L1 - 4/4/pvb - Stainless look	21	4000 mm
2090575	CR-XS1 - 6/6/pvb - Brute	19	4000 mm
2089698	CR-XS1 - 6/6/pvb - Stainless look	19	4000 mm
2089104	CR-L1 - 8 - Brute	21	4000 mm
2089358	CR-L1 - 8 - Stainless look	21	4000 mm
2090575	CR-XS1 - 12 - Brute	19	4000 mm
2089698	CR-XS1 - 12 -Stainless look	19	4000 mm

OPTIONAL FOR REAR COVER

		L
1012309	Rubber for the cover rear	1000 mm


end cover left



END COVERS

2090568 SB-OXS end cover left, Brute
2090558 SB-OXS end cover left, Stainless look
2090573 SB-OXS end cover right, Brute
2090563 SB-OXS end cover right, Stainless look

Small color differences between end caps and profiles are possible.

Check the instruction video

UNIQ SB-OXS | INFO

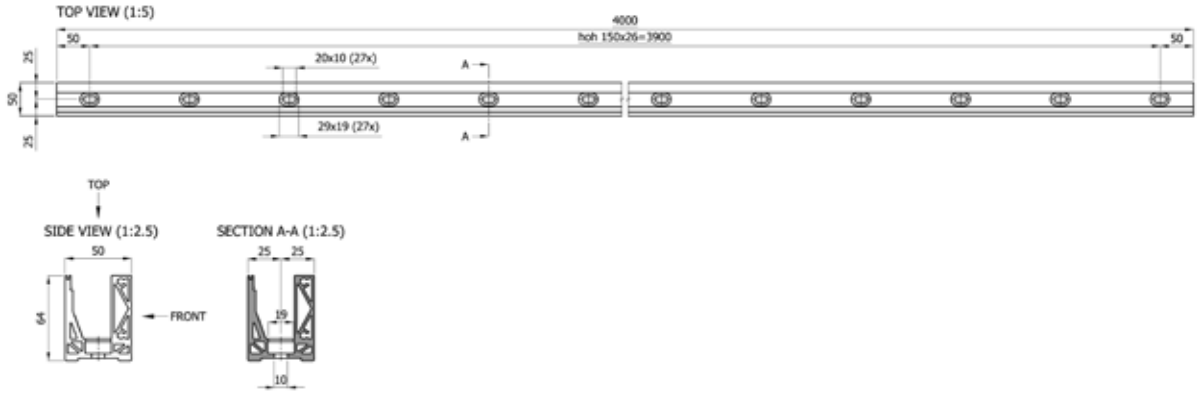

Glass	Hight (H)	Execution	Windload
4.4.2	600	tempered	1.5kN/m2
	900	tempered	0.6kN/m2
6.6.2	600	tempered	3.0kN/m2
	900	tempered	1.4kN/m2
8	600	tempered	2.0kN/m2
	900	tempered	0.6kN/m2
	600	float	0.75kN/m2
12	600	tempered	3.0kN/m2
	900	tempered	1.4kN/m2
	600	float	1.7kN/m2
	900	float	0.75kN/m2

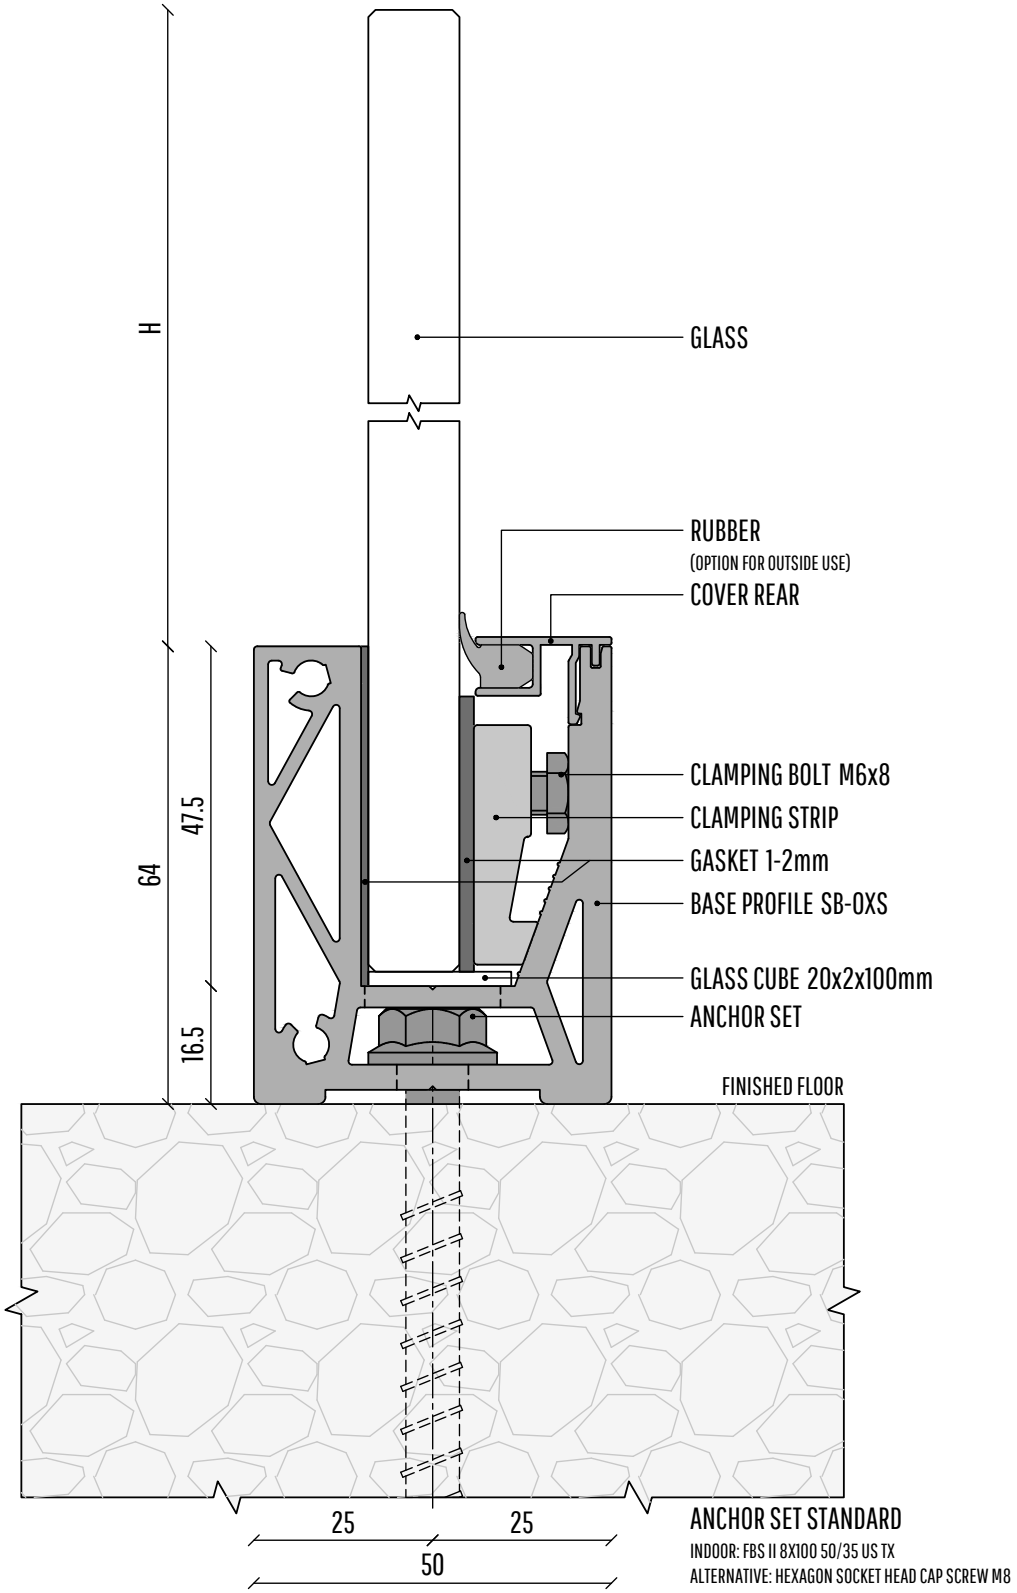
H
64
47.5
16.5
GLASS
RUBBER
(OPTION FOR OUTSIDE USE)
COVER REAR
CLAMPING BOLT M6x8
CLAMPING STRIP
GASKET 1-2mm
BASE PROFILE SB-0XS
GLASS CUBE 20x2x100mm
ANCHOR SET
FINISHED FLOOR
25
25
50
ANCHOR SET STANDARD
INDOOR: FBS II 8X100 50/35 US TX
ALTERNATIVE: HEXAGON SOCKET HEAD CAP SCREW M8

FISCHER ANCHORS

fischer
innovative solutions



ANCHOR SB-01

		MVE	HOH	MRA
2008327	FIS injection mortar SB 390 S	6		
2089149	FIS RSB 10 MINI capsule (alternative)	10		
2089819	FIS RGM 10x170 Threaded rod indoor	10	300	70
2089820	FIS RGM 10x170 Threaded rod A4 outdoor	10	300	70



ANCHOR SB-02

		MVE	HOH	MRA
2008327	FIS injection mortar SB 390 S	6		
2089149	FIS RSB 10 MINI capsule (alternative)	10		
2089819	FIS RGM 10x170 Threaded rod indoor	10	300	100
2089820	FIS RGM 10x170 Threaded rod A4 outdoor	10	300	100



ANCHOR SB-03

		MVE	HOH	MRA
2008327	FIS injection mortar SB 390 S	6		
2089149	FIS RSB 10 MINI capsule (alternative)	10		
2089141	FIS RGM 10x200 Threaded rod indoor	10	300	100
2089144	FIS RGM 10x200 Threaded rod A4 outdoor	10	300	100



ANCHOR SB-A1

		MVE	HOH	MRA
2008327	FIS injection mortar SB 390 S	6		
2089149	FIS RSB 10 MINI capsule (alternative)	10		
2089142	FIS A M 10x150 Threaded rod indoor	10	300	70
2089814	FIS A M 10x150 Threaded rod A4 outdoor	10	300	70



ANCHOR SB-A2

		MVE	HOH	MRA
2008327	FIS injection mortar SB 390 S6	6		
2089149	FIS RSB 10 MINI capsule (alternative)	10		
2089140	FIS A M 12x210 Threaded rod indoor	10	300	70
2089813	FIS A M 12x210 Threaded rod A4 outdoor	10	300	70



ANCHOR SB-A3

		MVE	HOH	MRA
2008327	FIS injection mortar SB 390 S	6		
2089149	FIS RSB 10 MINI capsule (alternative)	10		
2089140	FIS A M 12x210 Threaded rod indoor	10	300	70
2089813	FIS A M 12x210 Threaded rod A4 outdoor	10	300	70



ANCHOR SB-0 0.5S

		MVE	HOH	MRA
2089145	FIS FBS II 10x120/35 US Concrete screw indoor	50	250	70
2089143	FIS FBS II 10x120/35 US Concrete screw A4 outd.	50	250	70



ANCHOR SB-01S

		MVE	HOH	MRA
2089146	FIS FBS II 12x130/30 US Concrete screw indoor	20	250	80
2090469	FIS FBS II 12x130/30 US Concrete screw A4 outd.	20	250	80

ANCHOR SB-02S

		MVE	HOH	MRA
2090470	FIS FBS II 12x110 50/35/10 US Concr. screw ind	20	150	90
2090471	FIS FBS II 12x110 10/- US Concr. screw A4 outd	20	150	90



ANCHOR SB-A 0.5SI

		MVE	HOH	MRA
2089145	FIS FBS II 10 x 120/35 US Concr. screw indoor	50	250	70
2089143	FIS FBS II 10 x 120/35 US Concr. screw A4 outd	50	250	70

ANCHOR SB-A1S

		MVE	HOH	MRA
2089821	FIS FBS II 10x120/35 SK Concrete screw indoor	50	250	70
2074809	FIS FBS II 10x120/35 SK Concrete screw A4 outd.	50	250	70

ANCHOR SB-A2S

		MVE	HOH	MRA
2089821	FIS FBS II 10x120/35 SK Concrete screw indoor	50	100	70
2074809	FIS FBS II 10x120/35 SK Concrete screw A4 outd.	50	100	70

MVE = Minimum sales quantity
HOH = Center to center distance in millimeters
MRA = Normative edge distance in millimeters

MOUNTING TOOLS

TAPPING TOOL

2089137 Tapping tool

MOUNTING WRENCH

2089138 Mounting wrench

CONNECT PIN

2089139 Connect pin

ALSO AVAILABLE

WWW.SB-RAILING.COM

SLOTTED TUBE SYSTEM

Slotted Tube



304 Indoor satin		H	B	Ø	L
2004975	6	24	24	42.4	6000
2004980	6	30	27	48,3	6000
2004989	6	34	34	60,3	6000

316 Outdoor satin		H	B	Ø	L
2004976	6	24	24	42.4	6000
2004981	6	30	27	48,3	6000
2004990	6	34	34	60,3	6000

316 Outdoor mirror		H	B	Ø	L
2043237	6	24	24	42.4	6000
2043238	6	30	27	48,3	6000

Aluminium U Profile



Aluminium RVS Look		Glass	B	W	L
1021315	4	10/10/pvb	28	24	4000
1021397	4	8/8/pvb	19	15	4000
1021317	4	6/6/pvb	24	20	4000

Aluminium satin black		Glass	B	W	L
1021828	4	10/10/pvb	28	24	4000
1021829	4	8/8/pvb	24	20	4000
1021830	4	6/6/pvb	19	15	4000

Wall flange L S



304 Indoor satin		D	Ø	H
1183.426.304	1	95	42,4	30
1183.486.304	1	100	48,3	35
1183.603.304	1	107	60,3	35

316 Outdoor satin		D	Ø	H
1183.426.316	1	95	42,4	30
1183.486.316	1	100	48,3	35
1183.603.316	1	107	60,3	35

Adaptor L S



304 Indoor satin		D	Ø
1502.424.304	2	42,4x1,5	42,4
1502.483.304	2	42,4x1,5	48,3
1503.483.304	2	48,3x1,5	48,3

316 Outdoor satin		D	Ø
1502.424.316	2	42,4x1,5	42,4
1502.483.316	2	42,4x1,5	48,3
1503.483.316	2	48,3x1,5	48,3

Tube connector



304 Indoor satin		Ø
1201.425.304	2	42,4x1,5
1201.485.304	2	48,3x1,5
1201.605.304	2	60,3x1,5

316 Outdoor satin		Ø
1201.425.316	2	42,4x1,5
1201.485.316	2	48,3x1,5
1201.605.316	2	60,3x1,5

316 Outdoor mirror		Ø
1201.425.316#	2	42,4x1,5
1201.485.316#	2	48,3x1,5

Tube connector horizontal 90°



304 Indoor satin		Ø	H
1202.425.304	2	42,4x1,5	30
1202.485.304	2	48,3x1,5	35
1202.605.304	2	60,3x1,5	40

316 Outdoor satin		Ø	H
1202.425.316	2	42,4x1,5	30
1202.485.316	2	48,3x1,5	35
1202.605.316	2	60,3x1,5	40

316 Outdoor mirror		Ø	H
1202.425.316#	2	42,4x1,5	30
1202.485.316#	2	48,3x1,5	35

Tube connector vertical 90°



304 Indoor satin		Ø	H
1203.425.304	2	42,4x1,5	30
1203.485.304	2	48,3x1,5	35

316 Outdoor satin		Ø	H
1203.425.316	2	42,4x1,5	30
1203.485.316	2	48,3x1,5	35

End Cap



304 Indoor satin		Ø
1112.426.304	2	42,4x1,5
1112.486.304	2	48,3x1,5
1112.600.304	2	60,3x1,5

316 Outdoor satin		Ø
1112.426.316	2	42,4x1,5
1112.486.316	2	48,3x1,5
1112.600.316	2	60,3x1,5

316 Outdoor mirror		Ø
1112.426.316#	2	42,4x1,5
1112.486.316#	2	48,3x1,5

Tube connector adjustable

304 Indoor satin		D
1224.426.304	2	42,4x1,5
1224.485.304	2	48,3x1,5
1224.603.304	2	60,3x1,5

316 Outdoor satin		D
1224.426.316	2	42,4x1,5
1224.485.316	2	48,3x1,5
1224.603.316	2	60,3x1,5

Tube connector adjustable

304 Indoor satin		D
1225.426.304	2	42,4x1,5
1225.485.304	2	48,3x1,5
1225.603.304	2	60,3x1,5

316 Outdoor satin		D
1225.426.316	2	42,4x1,5
1225.485.316	2	48,3x1,5
1225.603.316	2	60,3x1,5

Oval slotted tube



304 Indoor satin		H	B	D	L
2070442	6	26	33	80x40x1,5	6000
2073101	6	26	33	110x40x1,5	6000

316 Outdoor satin		H	B	D	L
2073100	6	26	33	80x40x1,5	6000
2073102	6	26	33	110x40x1,5	6000

End Cap oval



304 Indoor satin		D
1112.804.304	2	80x40x1,5
1112.110.304	2	110x40x1,5

316 Outdoor satin		D
1112.804.316	2	80x40x1,5
1112.110.316	2	110x40x1,5

Glass profile tube rubbers



Rubber	L	Ø	B	G
6770.424.0800	6250	42,4	24	8 - 11
6770.424.1150	6250	42,4	24	11,5 - 13,5
6770.424.1600	6250	42,4	24	16 - 17,5
6770.424.2000	6250	42,4	24	20 - 21,5

Rubber	L	Ø	B	G
6770.483.0800	6250	48,3	27	8 - 11
6770.483.1150	6250	48,3	27	11,5 - 13,5
6770.483.1600	6250	48,3	27	16 - 17,5
6770.483.2000	6250	48,3	27	20 - 21,5
6770.603.0800	6250	60,3	34	8 - 11
6770.603.1150	6250	60,3	34	11,5 - 13,5
6770.603.1600	6250	60,3	34	16 - 17,5
6770.603.2000	6250	60,3	34	20 - 21,5
6770.603.2552	6250	60,3	34	25,52
6770.804.0800	6250	80/110x40	27	8 - 11
6770.804.1150	6250	80/110x40	27	11,5 - 13,5
6770.804.1600	6250	80/110x40	27	16 - 17
6770.804.2000	6250	80/110x40	27	20 - 21,5

Square slotted tube



304 Indoor satin		H	B	D	L
2081484	6	24	24	40x40x1,5	6000
2073103	6	24	24	60x40x1,5	6000

316 Outdoor satin		H	B	D	L
2081485	6	24	24	40x40x1,5	6000
2073104	6	24	24	60x40x1,5	6000

Wall flange square L S



304 Indoor satin		D	H	W
4183.404.304	2	95x95	28 mm	40x40x1,5
4183.640.304	2	100x80	28 mm	60x40x1,5

316 Outdoor satin		D	H	W
4183.404.316	2	95x95	28 mm	40x40x1,5
4183.640.316	2	100x80	28 mm	60x40x1,5

Tube connector square L



304 Indoor satin		W
4201.404.304	2	40x40x1,5
4201.640.304	2	60x40x1,5

316 Outdoor satin		W
4201.404.316	2	40x40x1,5
4201.640.316	2	60x40x1,5

End Cap square L



304 Indoor satin		W
4112.404.304	2	40x40x1,5
4112.640.304	2	60x40x1,5

316 Outdoor satin		W
4112.404.316	2	40x40x1,5
4112.640.316	2	60x40x1,5

Tube connector 90° horizontal L



304 Indoor satin		W	H
4202.404.304	2	40x40x1,5	50
4202.640.304	2	60x40x1,5	70

316 Outdoor satin		W	H
4202.404.316	2	40x40x1,5	50
4202.640.316	2	60x40x1,5	70

Tube connector 90° vertical L



304 Indoor satin		W	H
4203.404.304	2	40x40x1,5	30
4203.640.304	2	60x40x1,5	30

316 Outdoor satin		W	H
4203.404.316	2	40x40x1,5	30
4203.640.316	2	60x40x1,5	30

GLASS CLIPS

Glass clip model 00 - Flat

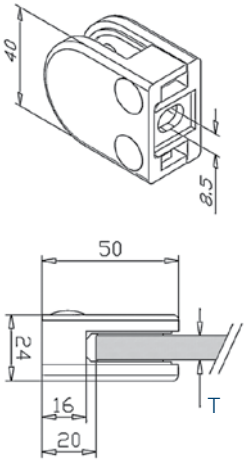

304 Indoor satin	
00.A2.000.01	4
316 Outdoor satin	
00.A4.000.01	4
Zamak Stainless look	
00.ZN.000.01	4
316 Outdoor satin black	
00.A4.000.05	4

Glass clip model 00 - Tube

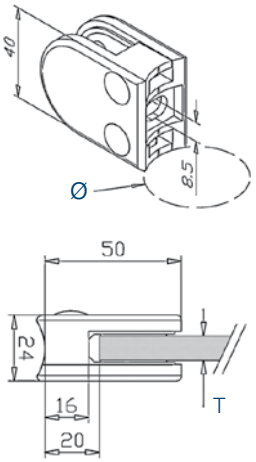

304 Indoor satin		Ø
00.A2.033.01	4	33,7
00.A2.042.01	4	42,4
316 Outdoor satin		**Ø**
00.A4.033.01	4	33,7
00.A4.042.01	4	42,4
Zamak Stainless look		**Ø**
00.ZN.042.01	4	42,4
316 Outdoor satin black		**Ø**
00.A4.042.05	4	42,4

Glass clip model 00 - Flat

Zamak Brute	
00.ZN.000.00	4

Glass clip model 00 - Tube

Zamak Brute		Ø
00.ZN.042.00	4	42,4

Rubbers model 00

Rubbers Model 00		Glass
6760.00.0600	8	6 mm
6760.00.0676	8	6,76 mm (3-0,76-3)
6760.00.0800	8	8 mm

Glass clip model 01 - Flat

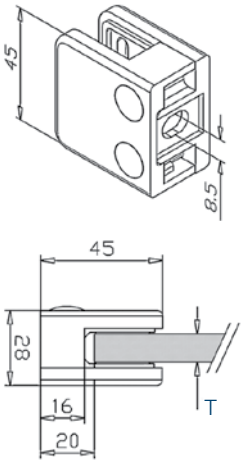

304 Indoor satin		
01.A2.000.01	4	

316 Outdoor satin		
01.A4.000.01	4	

Zamak Stainless look		
01.ZN.000.01	4	

Glass clip model 01 - Tube

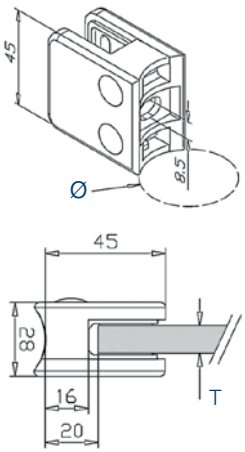

304 Indoor satin		Ø
01.A2.042.01	4	42,4

316 Outdoor satin		Ø
01.A4.042.01	4	42,4

316 Outdoor Mirror		Ø
01.A4.042.01#	4	42,4

Zamak Stainless look		Ø
01.ZN.042.01	4	42,4

Glass clip model 01 - Flat

Zamak Brute		
01.ZN.000.00	4	

Glass clip model 01 - Tube

Zamak Brute		Ø
01.ZN.042.00	4	42,4

Rubbers model 01

Rubbers Model 01		Glass
6760.01.0600	8	6 mm
6760.01.0676	8	6,76 mm (3-0,76-3)
6760.01.0800	8	8 mm
6760.01.0876	8	8,76 mm (4-0,76-4)
6760.01.0952	8	9,52 mm (4-1,52-4)
6760.01.1000	8	10 mm

Glass clip model 02 - Flat

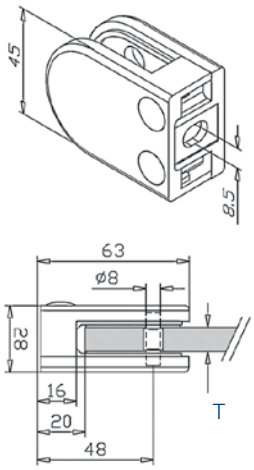

304 Indoor satin	
02.A2.000.01	4
316 Outdoor satin	
02.A4.000.01	4
Zamak Stainless look	
02.ZN.000.01	4
316 Outdoor satin black	
02.A4.000.05	4

Glass clip model 02 - Tube

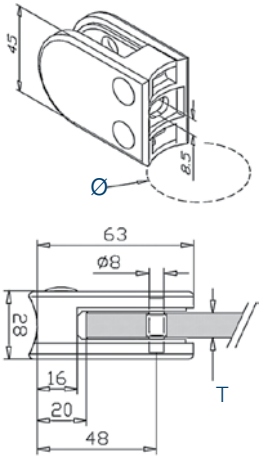

304 Indoor satin		Ø
02.A2.042.01	4	42,4
02.A2.048.01	4	48,3
316 Outdoor satin		**Ø**
02.A4.042.01	4	42,4
02.A4.048.01	4	48,3
316 Outdoor Mirror		**Ø**
02.A4.042.01#	4	42,4
02.A4.048.01#	4	48,3
Zamak Stainless look		**Ø**
02.ZN.042.01	4	42,4
02.ZN.048.01	4	48,3
316 Outdoor satin black		**Ø**
02.A4.042.05	4	42,4

Glass clip model 02 - Flat

Zamak Brute	
02.ZN.000.00	4

Glass clip model 02 - Tube

Zamak Brute		Ø
02.ZN.042.00	4	42,4
02.ZN.048.00	4	48,3

Rubbers model 02

Rubbers Model 02		Glass
6760.02.0600	8	6 mm
6760.02.0676	8	6,76 mm (3-0,76-3)
6760.02.0800	8	8 mm
6760.02.0876	8	8,76 mm (4-0,76-4)
6760.02.0952	8	9,52 mm (4-1,52-4)
6760.02.1000	8	10 mm

standard in packing model 02

Glass clip model 03 - Flat S

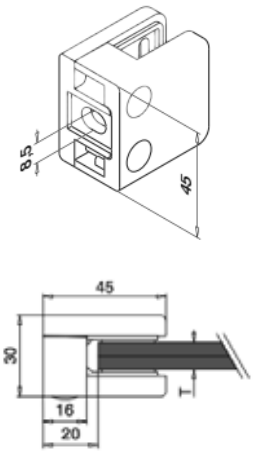

304 Indoor satin		
03.A2.000.01	4	

316 Outdoor satin		
03.A4.000.01	4	

316 Outdoor satin black		
03.A4.000.05	4	

Glass clip model 03 - Tube S

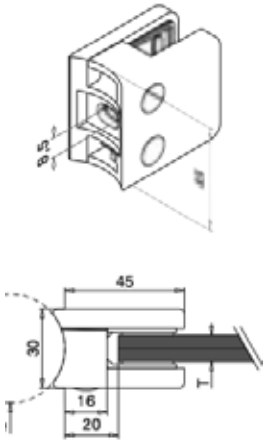

304 Indoor satin		Ø
03.A2.042.01	4	42,4

316 Outdoor satin		Ø
03.A4.042.01	4	42,4

316 Outdoor satin black		Ø
03.A4.042.05	4	42,4

Standard in Packing Model 03

Rubbers Model 03

Rubbers Model 03		Glass
6760.03.0600	8	6 mm
6760.03.0676	8	6,76 mm (3-0,76-3)
6760.03.0800	8	8 mm
6760.03.0876	8	8,76 mm (4-0,76-4)
6760.03.0952	8	9,52 mm (4-1,52-4)
6760.03.1000	8	10 mm

Glass clip model 04 - Flat S

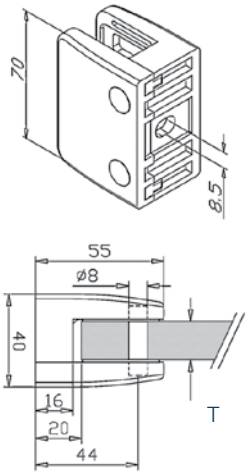

304 Indoor satin		
04.A2.000.01	4	

316 Outdoor satin		
04.A4.000.01	4	

Zamak Stainless look		
04.ZN.000.01	4	

Glass clip model 04 - Tube S

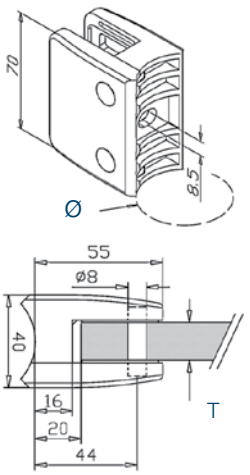

304 Indoor satin		Ø
04.A2.048.01	4	48,3

316 Outdoor satin		Ø
04.A4.048.01	4	48,3

Zamak Stainless look		Ø
04.ZN.048.01	4	48,3

Glass clip model 04 - Flat S

Zamak Brute		
04.ZN.000.00	4	

Glass clip model 04 - Tube S

Zamak Brute		Ø
04.ZN.048.00	4	48,3

Rubbers model 04

Rubbers Model 04		Glass
6760.04.0952	8	9,52 mm (4-1,52-4)
6760.04.1000	8	10 mm
6760.04.1152	8	11,52 mm (5-1,52-5)
6760.04.1200	8	12 mm
6760.04.1276	8	12,76 mm (6-0,76-6)
6760.04.1352	8	13,52 mm (6-1,52-6)
6760.04.1500	8	15 mm
6760.04.1676	8	16,76 mm (8-0,76-8)
6760.04.1752	8	17,52 mm (8-1,52-8)

standard in packing model 04

Glass clip model 05 - Flat S

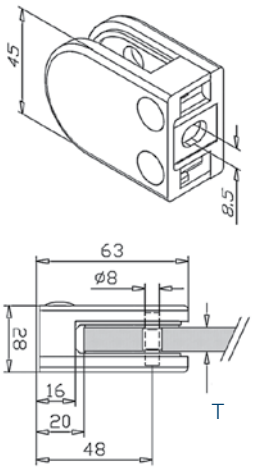

304 Indoor satin	
05.A2.000.01	4

316 Outdoor satin	
05.A4.000.01	4

Zamak Stainless look	
05.ZN.000.01	4

Glass clip model 05 - Tube S

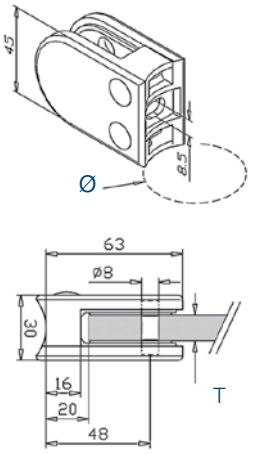

304 Indoor satin		Ø
05.A2.042.01	4	42,4
05.A2.048.01	4	48,3

316 Outdoor satin		Ø
05.A4.042.01	4	42,4
05.A4.048.01	4	48,3

Zamak Stainless look		Ø
05.ZN.042.01	4	42,4
05.ZN.048.01	4	48,3

Glass clip model 05 - Flat S

Zamak Brute	
05.ZN.000.00	4

Glass clip model 05 - Tube S

Zamak Brute		Ø
05.ZN.042.00	4	42,4
05.ZN.048.00	4	48,3

Rubbers model 05

Rubbers Model 05		Glass
6760.05.1076	8	5-0,76-5 mm
6760.05.1152	8	5-1,52-5 mm
6760.05.1200	8	12 mm
6760.05.1276	8	6-0,76-6 mm

standard in packing model 05

Glass clip model 06 - Flat

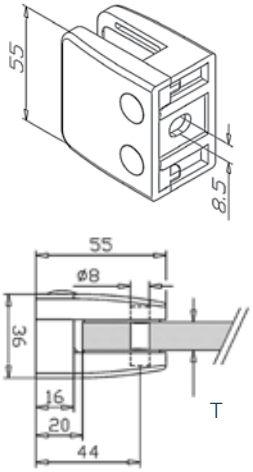

304 Indoor satin	
06.A2.000.01	4
316 Outdoor satin	
06.A4.000.01	4
Zamak Stainless look	
06.ZN.000.01	4
316 Outdoor satin black	
06.A4.000.05	4

Glass clip model 06 - Tube

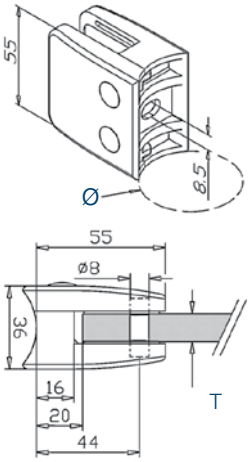

304 Indoor satin		Ø
06.A2.042.01	4	42,4
06.A2.048.01	4	48,3
316 Outdoor satin		**Ø**
06.A4.042.01	4	42,4
06.A4.048.01	4	48,3
316 Outdoor Mirror		**Ø**
06.A4.042.01#	4	42,4
06.A4.048.01#	4	48,3
Zamak Stainless look		**Ø**
06.ZN.042.01	4	42,4
06.ZN.048.01	4	48,3
316 Outdoor satin black		**Ø**
06.A4.042.05	4	42,4

Glass clip model 06 - Flat

Zamak Brute	
06.ZN.000.00	4

standard in packing model 06

Glass clip model 06 - Tube

Zamak Brute		Ø
06.ZN.042.00	4	42,4
06.ZN.048.00	4	48,3

Rubbers model 06

Rubbers Model 06		Glass
6760.06.0800	8	8 mm
6760.06.0876	8	8,76 mm (4.0,76-4)
6760.06.0952	8	9,52 mm (4-1,52-4)
6760.06.1000	8	10 mm

Rubbers Model 06		Glass
6760.06.1076	8	10,76 mm (5-0,76-5)
6760.06.1152	8	11,52 mm (5-1,52-5)
6760.06.1200	8	12 mm
6760.06.1276	8	12,76 mm (6-0,76-6)

Glass clip model 07 - Flat

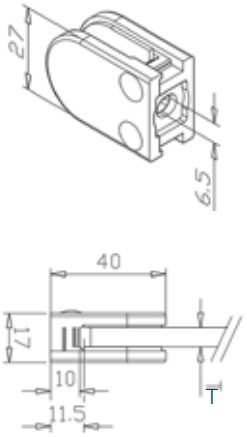

304 Indoor satin		
07.A2.000.01	4	

316 Outdoor satin		
07.A4.000.01	4	

Zamak Stainless look		
07.ZN.000.01	4	

Glass clip model 07 - Tube

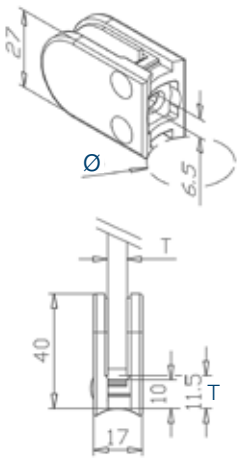

304 Indoor satin		Ø
07.A2.254.01	4	25,4
07.A2.337.01	4	33,7

316 Outdoor satin		Ø
07.A4.254.01	4	25,4
07.A4.337.01	4	33,7

Zamak Stainless look		Ø
07.ZN.254.01	4	25,4
07.ZN.337.01	4	33,7

Glass clip model 07 - Flat

Zamak Brute		
07.ZN.000.00	4	

Glass clip model 07 - Tube

Zamak Brute		Ø
07.ZN.254.00	4	25,4
07.ZN.337.00	4	33,7

Rubbers model 07

Rubbers Model 07		Glass
6760.07.0600	8	6 mm
6760.07.0676	8	6,76 mm (3-0,76-3)
6760.07.0800	8	8 mm
6760.07.0876	8	8,76 mm (4-0,76-4)

Glass clip model 08 - Flat S

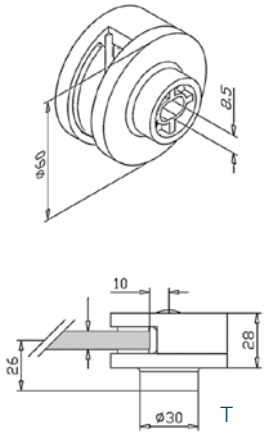

316 Outdoor satin	
08.A4.000.01	4

Glass clip model 08 - Tube S

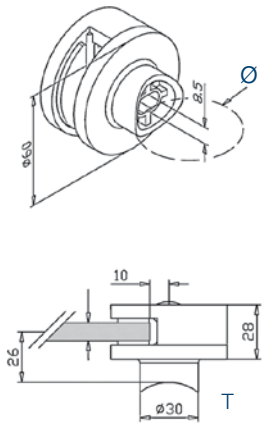

316 Outdoor satin		Ø
08.A4.042.01	4	42,4
08.A4.048.01	4	48,3

Glass clip model 09 - Flat S

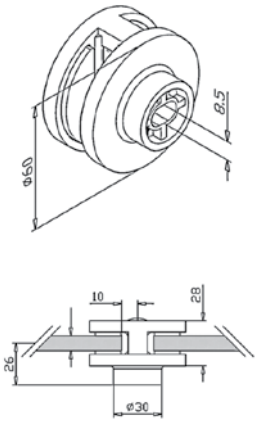

316 Outdoor satin	
09.A4.000.01	4

Glass clip model 09 - Tube S

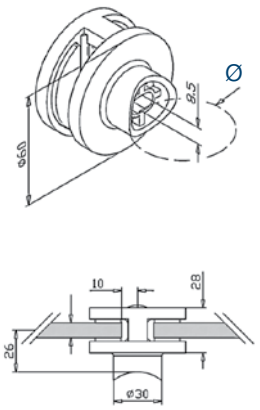

316 Outdoor satin		Ø
09.A4.042.01	4	42,4
09.A4.048.01	4	48,3

Rubbers model 08/09

Rubbers Model 08/09		Glass
6760.09.0800	8	8 mm
6760.09.0876	8	8,76 mm (4-0,76-4)
6760.09.0952	8	9,52 mm (4-1,52-4)
6760.09.1000	8	10 mm
6760.09.1076	8	10,76 mm (5-0,76-5)
6760.09.1152	8	11,52 mm (5-1,52-5)
6760.09.1200	8	12 mm
6760.09.1276	8	12,76 mm (6-0,76-6)

Glass clip model 10 - 090 S

304 Indoor satin		
10.A2.090.01	2	

316 Outdoor satin		
10.A4.090.01	2	

Glass clip model 10 - 180 S



304 Indoor satin		
10.A2.180.01	2	

316 Outdoor satin		
10.A4.180.01	2	

Rubbers model 10

Rubbers Model 10		Glass
6760.10.0600	8	6 mm
6760.10.0800	8	8 mm
6760.10.0876	8	8,76 mm (4-0,76-4)
6760.10.0952	8	9,52 mm (4-1,52-4)
6760.10.1000	8	10 mm

Glass clip model 11 - Flat S

316 Outdoor satin		Glass
11.A4.000.01	1	16,76-19mm

Glass clip model 11 - 090



316 Outdoor satin		Glass
11.A4.090.01	1	16,76-19mm

Glass clip model 11 - 180



316 Outdoor satin		Glass
11.A4.180.01	1	16,76-19mm

Glass clip model 11 - 270



316 Outdoor satin		Glass
11.A4.270.01	1	16,76-19mm

SPIGOT

Round Spigot







Duplex 2205 satin		Glass
0397.000.225	1	13,52 –17,52mm

Square Spigot







Duplex 2205 satin		Glass
0398.000.225	1	13,52 –17,52mm

Round Spigot black







Duplex 2205 satin black		Glass
0397.000.225@	1	13,52 –17,52mm

Square Spigot black







Duplex 2205 satin black		Glass
0398.000.225@	1	13,52 –17,52mm

IMS NEDERLAND B.V.
GILDENWEG 21
NL-3334 KC ZWIJNDRECHT
T +31 78 6230600
INFO@UNIQ-BALUSTRADES.COM
WWW.UNIQ-BALUSTRADES.COM

IMS Nederland

v.03.2023